

AMENDMENT NO. 4 OCTOBER 2016
TO
IS 15476 : 2004 BAMBOO MAT CORRUGATED SHEETS —
SPECIFICATION

(Page 1, clause 1) — Insert ‘and bamboo mat ridge caps (BMRC)’ between ‘(BMCS)’ and ‘for’.

(Page 1, clause 6.1, line 2) — Substitute ‘Fig. 1A’ for ‘Fig. 1’.

(Page 1, clause 6.1.1) — Insert the following new clause after 6.1.1::

‘6.2 The length and width of the ridge caps shall be of size 430 mm and 1 050 mm respectively with tolerances of ± 10 mm and the thickness shall be $3.8 \text{ mm} \pm 10\%$. The ridge caps shall conform to the dimensions given in Fig. 1B.’

(Page 2, Fig. 1) — Substitute the following new figure for the existing figure:


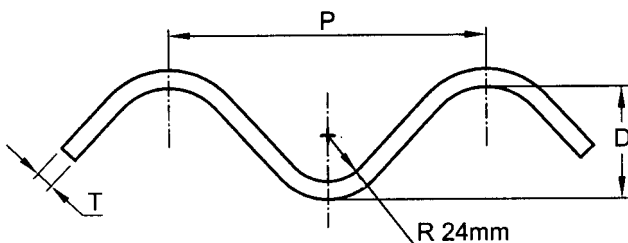


FIG. 1A PITCH AND DEPTH OF CORRUGATED SHEETS

Amendment No. 4 to IS 15476 : 2004

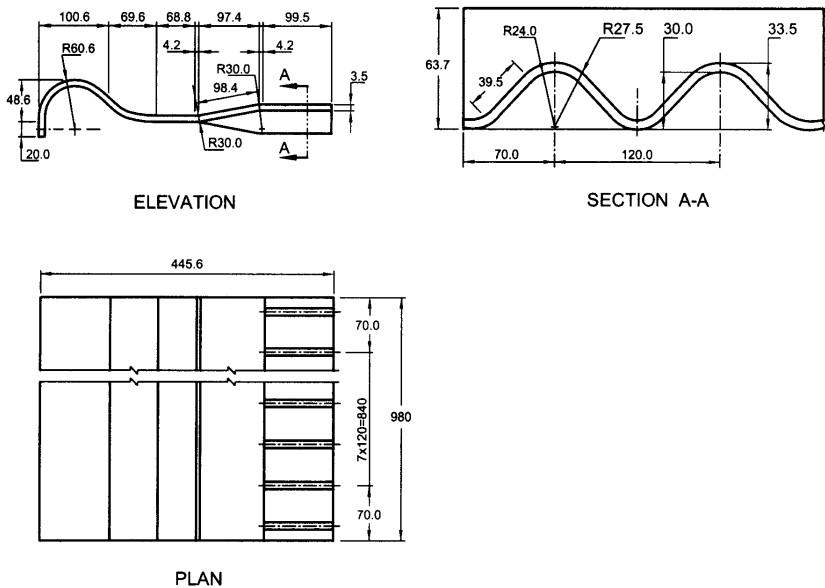

All dimensions are nominal and in mm.

FIG. 1B A TYPICAL RIDGE CAP AND ITS DIMENSIONS

(Page 2, clause 8.1) — Insert the following new clause after 8.1:

‘8.2 BMRC shall conform to the requirement given in Sl. No. (iv) and (v) of Table 2 when tested in accordance with the provision given in the corresponding col 4 of Table 2.’