

AMENDMENT NO. 1 JULY 1993
TO
IS 1708 (Parts 1 to 18) : 1986 METHODS OF
TESTING SMALL CLEAR SPECIMENS OF TIMBER

(Second Revision)

(Cover page, pages 1 and 3, and first page of individual parts of the standard) — Delete the word 'clear' from the title of the standard.

(Page 3, contents) — Substitute 'cleavage' for 'clearage' against the title for IS 1708 (Part 14) : 1986.

(Page 5, clause 0.2) — Substitute 'density, effect' for 'density effect' in line 2 and delete the word 'being' in line 11.

(Page 5, clause 0.3, second sentence) — Substitute the following for the existing sentence:

'For standard evaluation of physical and mechanical properties of a species from a locality, at least ten trees are chosen at random from the locality and sampling of material for different tests is done in accordance with IS 2455 : 1990*.'

(Page 5, foot-note marked with '' mark)* — Substitute the following for the existing foot-note:

'*Method of sampling of model trees and logs and their conversion for timber testing.'

(Page 6, clause 0.5) — Substitute the word 'controlled' after 'under' in line 6 and insert the word 'value' after 'specified' in the last line.

(Page 6, clause 0.6, line 4) — Insert the words 'average is' between 'and' and 'recorded'.

(Page 12, clause 4.2, matter on the right hand side of '=') — Substitute the following for the existing matter:

'Specific gravity at moisture content $m \times 1000$.'

(Page 13, clause 3.2, last line) — Insert the word 'immersion' between 'by' and 'method'.

(Page 15, clause 4.1, first line on the right hand side of '=' against ' W_r and V_r ') — Delete the word 'initial'.

(Page 21, clause 3.1, line 7) — Substitute '75 mm' for '75 cm'.

[Page 22, clause 3.3 (a), line 2] — Substitute 'neutral' for 'netural'.

[Page 23, clause 4.2 (ii)] — Substitute $\frac{3 P' l'}{2 b h^2}$ for $\frac{3 P l'}{2 b h^2}$.

(Page 26, clause 4.3) — Substitute the following for the existing clause:

4.3 In the absence of suitable planimeter the work shall be calculated by the following formulae:

Work to limit of proportionality

$$(Wk \text{ to } LF) = \frac{P \Delta}{2 l b h}$$

Work to maximum load

$$(Wk \text{ to } ML) = \frac{0.6}{l b h} \left\{ P \Delta_m + P' (\Delta_m - \Delta) \right\} - 0.018$$

$$\text{Total work} = Wk \text{ to } ML + \frac{d}{2 l b h} (P' + P'') + 2 (P_1 + P_2 \dots P_k),$$

when readings are taken at suitable intervals of deflection.

$$\text{Total work} = \frac{0.34}{l b h} \left\{ P \Delta_m + P' (\Delta_t - \Delta) + P'' (\Delta_t - \Delta_m) \right\} + 0.46,$$

when readings are taken at suitable intervals of load.

where

m = deflection in cm at maximum load,

d = common difference of deflection between successive load readings beyond maximum load in cm,

P'' = final load of 100 kg or 20 kg or load equivalent to 15 cm or 6 cm deflection as mentioned in para 3.3(c),

$P_1 \dots P_k$ = loads (ordinates) at fixed intervals of deflection between P' and P'' , and

Δ_t = final deflection of 15 cm or 6 cm or deflection corresponding to final load of 100 kg or 20 kg as mentioned in 3.3(c).

(Page 28, Fig. 1) — Delete dial gauges from the figure.

(Page 29, clause 4.2, Sl No. 5) — Substitute $\frac{3 P'}{4 b h}$ for $\frac{3 P}{4 b h}$.

(Page 31, clause 3.1, line 10) — Substitute '75 mm' for '75 cm'.

(Page 33, clause 4.2, line 1) — Substitute 'drop (H)' for 'drop'.

(Page 33, clause 4.3) — Substitute ' H'' ' for ' H ' in Sl No. (i) and (v); and substitute 'limit of proportionality' for 'limit at proportionality' in the last line.

(Page 36, clause 3.4, line 4) — Substitute 'appearance' for 'apperance' and 'fractured' for 'frictured'.

(Page 36, clause 4.1) — Substitute '(CS at LP)' for '(CS at ML)' in Sl No. (i), '(CS at ML)' for '(CS at LP)' in Sl No. (ii) and '(M of E in Compression II)' for '(M of E in Compression II)' in Sl No. (iii).

(Page 37, at the top right corner of page) — Substitute 'IS : 1708 (Part 8)-1986' for 'IS 1708 (Part 6)-1986'.

(Page 40, clause 4.1) — Substitute '(M of E in compression 1)' for '(M of E in compression)' in Sl No. (iv) and '2×2 cm' for '5×2 cm' in the right hand side of '=' against 'A'.

(Page 41, clause 3.1) — Substitute 'coller or' for 'coller, a' in line 5 and 'indentation' for 'identation' in line 6.

(Page 43, clause 3.1, line 5) — Substitute 'sheared' for 'shared'.

(Page 43, clause 3.2) -- Insert the words 'for both the sizes' at the end.

(Page 43, clause 4.1, last line) — Delete the words 'for both sizes'.

(Page 44, Fig. 1) — Substitute the figure given on page 4 for the existing figure,

(Page 45, Fig. 1) — Insert '1A' above the title of the figure.

(Page 46, Fig. 1) — Insert '1B' above the title of the figure.

(Page 46, clause 3.3, line 3) — Substitute 'are' for 'and'.

(Page 52, Fig. 1B) — Substitute '22 mm' for '20 mm' for the dimension between the centre of 4 mm diameter drilled hole to the end.

(Page 53, clause 3.1, line 3) — Substitute 'screws' for 'screws'.


(Page 55, clause 4.3, line 1) — Delete the word 'maximum'.

(Page 59, clause 3.1) — Substitute 'the' for 'to' in line 4 and 'swing' for 'owing' in last line.


(Page 61, clause 2.1) — Substitute 'diameter' for 'radius' in line 3 and insert the words 'diameter of' between 'The' and 'end' in line 4.

(Page 61, Fig. 1) — Substitute '30/15 ϕ ' for '30 ϕ ' and '25/12 ϕ ' for '25 ϕ '.


(Page 62, clause 4.1) — Substitute $\frac{2 ML}{\pi r^4 \theta}$ for $\frac{2 ML}{\pi r^4}$ in SI
No. (iii) and ' θ ' for ' π ' in last but one line.

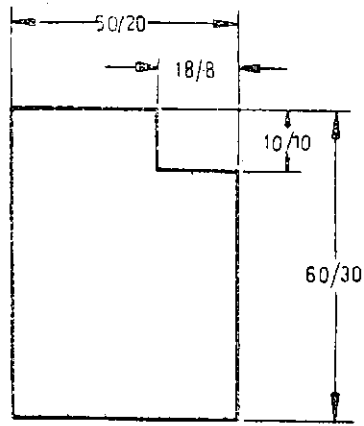

ELEVATION

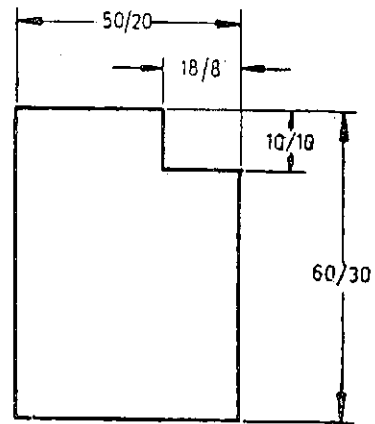


ELEVATION



BOTTOM VIEW

1A TANGENTIAL SPECIMEN



BOTTOM VIEW

1B RADIAL SPECIMEN

All dimensions in millimetres.

FIG. 1 TEST SPECIMEN FOR SHEAR PARALLEL TO GRAIN

(CED 9)

Printed at Printwell Printers, Aligarh, India