

**AMENDMENT NO. 3 AUGUST 2023**  
**TO**  
**IS 1734 (PART 3) : 1983 METHODS OF TEST FOR PLYWOOD**  
**PART 3 DETERMINATION OF FIRE RESISTANCE**  
( *Second Revision* )

(Page 1, clause 3.1, line 2) — Insert the following at the end of first sentence:

‘Two plywood samples may be glued at each level for samples of less than or equal to 9 mm thickness.’


[Page 2, clause 4.2, line 4 (see also Amendment No. 1 and 2)] — Insert the following after the sentence:

‘Pilot torch flame of 20 mm from gas burner and flame length resulting from mixing gas and compressed air of 100 mm may be achieved.’

[Page 2, clause 5.2, first sentence, (see also Amendment No. 1 and 2)] — Substitute the following with the existing:

‘The test specimen is suspended in a fire tube and adjusted at a height of 30 mm from the flame of 50 mm length from the burner (see Fig. 3).’

(Page 3, Fig. 1) — Substitute the following figure for the existing:

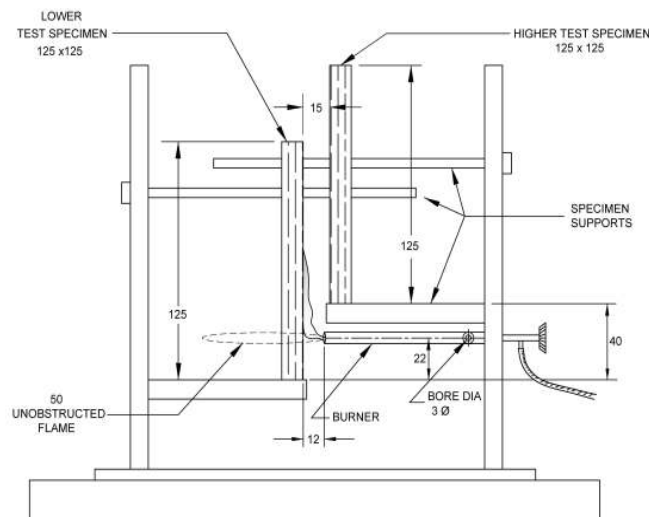

All dimensions in millimetres.

FIG. 1 SCHEMATIC DIAGRAM FOR FLAMMABILITY TEST

(CED 20)

**Price Group 1**

Publication, BIS, New Delhi, India