

AMENDMENT NO. 1 MARCH 2026

TO

IS 15947 (PART 1) : 2020 CONCRETE DELIVERY PIPELINE

PART 1 SPECIFICATION

(First Revision)

(Page 1, Clause 2) — Substitute the following for the existing:

IS No./Other Standards	Title
IS 1762 (Part 1) : 1974	Code for designation of steels: Part 1 Based on letter symbols (<i>first revision</i>)
IS 2004 : 1991	Carbon steel forgings for general engineering purposes — Specification (<i>third revision</i>)
IS 2102 (Part 1) : 1993/ ISO 2768-1 : 1989	General tolerances: Part 1 Tolerances for linear and angular dimensions without individual tolerance indications (<i>third revision</i>)
IS 2932 (Part 1) : 2013	Enamel, synthetic, exterior: (a) Undercoating (b) Finishing — Specification: Part 1 For domestic and decorative applications (<i>fourth revision</i>)
IS/ISO 3183 : 2019	Petroleum and natural gas industries steel pipe for pipeline transportation systems (<i>second revision</i>)
IS 10234 : 1982	Recommendations for general pipeline welding
DIN 24118 : 2007	Construction equipment and building material machinery — Concrete delivery pipelines — Dimensions and calculations

(Page 1, clause 3.1, line 2) — Substitute ‘this’ for ‘the’.

(Page 1, clause 3.1.1) — Substitute the following for existing:

‘The steel pipes of concrete delivery pipeline shall be seamless steel tubes complying with pipe grade/steel grade designation SMLS L390N or SMLS L390Q of Product Specification Level – 2 (PSL – 2), conforming to IS/ISO 3183. If required, the pipes may be cold-drawn to achieve the required diameter and thickness. Cold-drawn pipes shall be normalized after the final cold draw pass. Tolerance limits of outside diameter and thickness of pipes shall be in accordance with Table A.3 and Table A.4 of IS/ISO 3183.

NOTE — Wherever site conditions demand high pumping pressures; seamless steel pipes of Product Specification Level – 2 (PSL - 2) complying with higher pipe grade/steel grade designations may be ordered subject to mutual agreement between the purchaser and the supplier for use of the specific higher steel grade of pipes conforming to IS/ISO 3183.’

(Page 2, clause 4.1) — Substitute the following for existing:

‘Manufacturer’s test certificates of seamless steel pipes and flanges meeting the requirements of IS/ISO 3183 and IS 2004 respectively shall be furnished by the supplier of concrete delivery pipeline to the purchaser.’

(Page 2, clause 4.1.1) — Substitute the following for existing:

‘If specifically agreed between the supplier and the purchaser, manufacturer’s test certificates for chemical composition of steel used for seamless steel pipes, to meet requirements of Table A.1 of IS/ISO 3183 (corresponding to tube designation SMLS L390N or SMLS L390Q, as the case may be) shall be furnished.’

(Page 3, clause 5.1.1) — Substitute the following for existing:

‘Pipeline for placement booms shall be of nominal bore 100 mm or 125 mm or 150 mm.’

Price Group 2

Amendment No. 1 to 15947 (Part 1) : 2020

(Page 3, clause 5.1.3) — ‘Delete’.

(Page 3, clause 5.1.4) — ‘Delete’.

(Page 3, Notes 4) — Add the following at the end.

‘5 Pipes with 4.5 mm wall thickness may be used for practically all normal operations of concreting through concrete delivery pipeline, subject to the following maximum pumping pressures of concrete:

- a) For 100 NB pipes, pumping pressure shall not exceed 140 kg/cm²;
- b) For 125 NB pipes, pumping pressure shall not exceed 110 kg/cm²; and
- c) For 150 NB pipes, pumping pressure shall not exceed 90 kg/cm².


6 Pipes with 8 mm wall thickness shall be used for following higher pumping pressures of concrete pipes:

- a) For 100 NB pipes, pumping pressure shall not exceed 230 kg/cm²;
- b) For 125 NB pipes, pumping pressure shall not exceed 190 kg/cm²; and
- c) For 150 NB pipes, pumping pressure shall not exceed 160 kg/cm².


(Page 3, clause 5.3) — Add the following at the end.

‘NOTE — Intermediate lengths of straight pipes and reducer pipes (see 5.2 and 5.3) may also be manufactured suiting to the specific requirements for the purchaser.’

(Page 4, Fig. 4) — Substitute the following for existing:

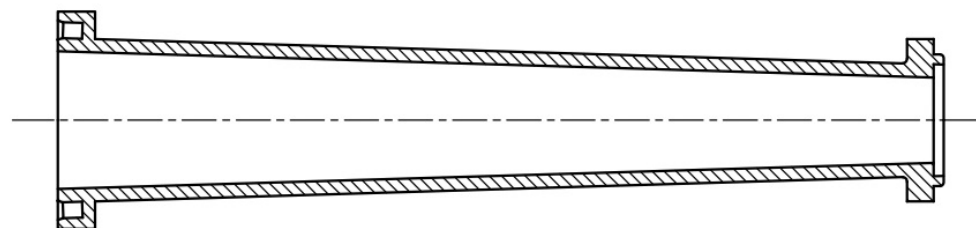

REDUCER PIPE (PLAIN)

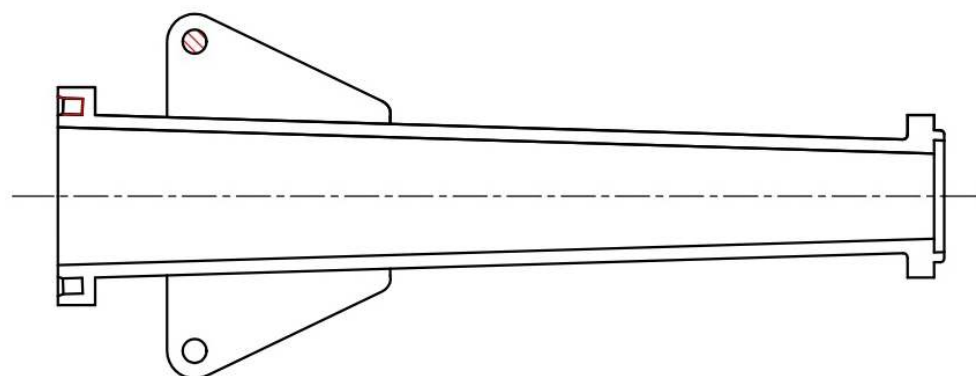

REDUCER PIPE (WITH EYES) – FOR TIGHTENING BY CLAMPING DEVICE

FIG. 4 REDUCER PIPE

Amendment No. 1 to 15947 (Part 1) : 2020

(Page 5, Fig. 6, Table, fourth header) — Substitute ‘ $r \approx 2000$ ’ for ‘ $r \approx 1000$ ’.

(Page 6, Fig. 8, Table) — Substitute the following to existing:

SI No.	Nominal Bore NB	d_2	d_3	h_1	h_2	h_3
(1)	(2)	(3)	(4)	(5)	(6)	(7)
1	100	127	115	17	12	38
2	125	148	139	17	12	38
3	150	168	159	17	12	38

(MED 18)

Publication, BIS, New Delhi