

AMENDMENT NO. 1 JUNE 2005
TO
IS 14616 : 1999 LAMINATED VENEER LUMBER —
SPECIFICATION

(Page 2, clause 8.2.3) — Substitute the following for the existing:

'Six specimens each shall be tested for modulus of rupture and modulus of elasticity, compressive strength parallel to grain and perpendicular to grain (both parallel and perpendicular to laminate), horizontal shear strength (both parallel and perpendicular to grain), tensile strength parallel to grain and nail and screw holding power in accordance with the methods given in IS 1659 (Annex J), IS 1708 (Part 8), IS 1708 (Part 11), IS 1734 (Part 9) and IS 1708 (Part 15), respectively and the average values for each test shall conform to the requirements given under SI No. (i) to (vii) of Table 1. The placement of forces for compressive strength shall be as given in Fig. 1.'

(Page 3, clause 10) — Insert the following figure after the clause:

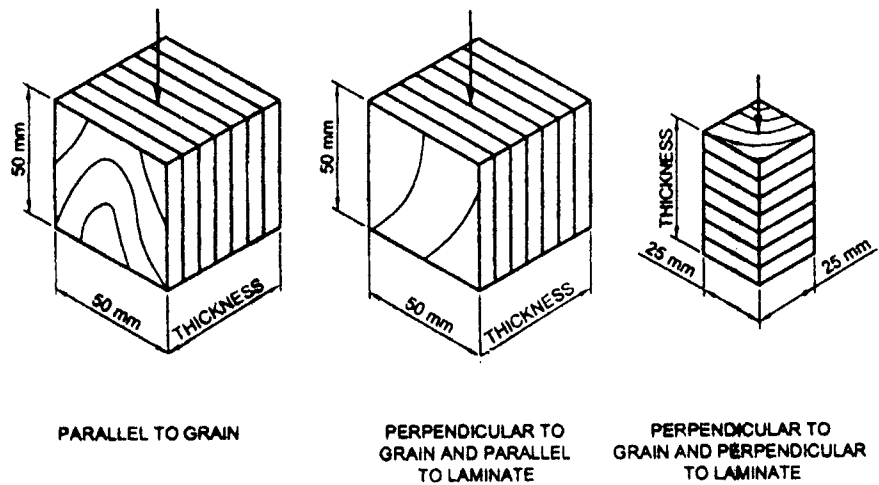


FIG. 1 PLACEMENT OF FORCES FOR COMPRESSIVE STRENGTH

Amend No. 1 to IS 14616 : 1999

(*Page 4, Annex A*) — Insert the following at appropriate place:

IS 1659 : 2004 Block boards — Specification (*fourth revision*)

IS 1734 (Part 9) : 1983 Methods of test for plywood : Part 9 Determination
of tensile strength (*second revision*)

(CED 20)