

**AMENDMENT NO. 1 MAY 2004
TO
IS 14787 : 2000 UNPLASTICIZED PVC PIPES (DUCTS)
AND FITTINGS FOR UNDERGROUND
TELECOMMUNICATIONS CABLE
INSTALLATION - —SPECIFICATION**

(Foreword, para 9) — Substitute 'Annex Q' for 'Annex P'.

(Page 1, clause 1, line 2) — Substitute 'PVC-U' for 'UPVC'.

(Page 2, clause 7.1.1, line 1) — Substitute 'measured' for 'obtained'.

(Page 2, clause 8.1, line 3) — Insert 'reasonably' after 'be'.

(Page 2, clause 8.2, line 5) — Substitute '0.22 MPa' for '0.25 MPa'.

[Page 2, clause 8.3.2(a)] — Substitute '15 percent' for '12 percent'.

(Page 3, clause 9.2) — Substitute the following for the existing:

'9.2 Tensile Strength and Elongation

When tested by the method described in Annex P, the tensile strength and elongation at break shall not be less than 40 MPa and 30 percent respectively.'

(Page 3, clause 12, last line) — Insert 'This shall be a type test.' at the end.

(Page 3, clause 13.2.1, line 2) — Substitute 'coupler' for 'socket'.

(Page 3, Fig. 1, Caption) — Substitute 'COUPLER' for 'SOCKET'.

(Page 4, clause 14) — Insert the following at the end:

'Jointing shall be carried out using solvent cement conforming to IS 14182.'

(Page 5, Annex A) — Insert the following at the end:

'IS 14182 : 1994 Solvent cement for use with unplasticized polyvinyl chloride plastic pipe and fittings — Specification'

(Page 6, clause B-2, last line) — Substitute ' 12.5 ± 0.5 ' for ' 5 ± 1 '.

Amend No. 1 to IS 14787 : 2000

[Page 8, clause F-2(b), Sl No. 3 and 4] — Substitute the following for the existing:

3) The weight shall be 1.7 ± 0.02 kg (by putting high density material inside, if required);

4) The length shall be $1\,500 \pm 10$ mm;

(Page 9, Fig. 4) — Substitute ' $1\,500 \pm 10$ ' for ' 150 ± 10 '.

(Page 11, Table 8, line 3, col 2) — Substitute ' $5 \pm 0.5\%$ ' for ' $6 \pm 0.5\%$ '.

(Page 11, Annex J, clause J-2, line 3) — Substitute 'wiped dry' for 'wipe, dried'.

(Page 11, Annex J, clause J-2, line 9) — Substitute 'removed' for 'moved'.

(Page 12, Annex K, clause K-3.5, line 2) — Substitute 'constant' for 'content'.

(Page 13, Annex L, clause L-4.2.1, line 9) — Insert 'in' after 'leave'.

(Page 13, Annex L, clause L-4.3.6, line 2) — Substitute 'sodium' for 'ammonium'.

(Page 15, Annex N, clause N-1.5, line 4) — Insert 'and' after 'Density'.

(Page 15, Annex N, clause N-1.5, lines 4 and 5) — Delete '**and Titanium Dioxide Content**'.

(Page 15, Annex N, clause N-1.5.1, line 6) — Insert 'and' after 'Density.'

(Page 15, Annex N, clause N-1.5.1, lines 6 and 7) — Delete 'and titanium dioxide content'.

(Page 15, Table 10, Title) — Insert 'and' after 'Density'.

(Page 15, Table 10, Title) — Delete '**and Titanium Dioxide Content**'.

(Page 15, Annex N, clause N-2, line 1) — Substitute '**8.6, 10 and 12**' for '**8.6 and 10**'.

Amend No. 1 to IS 14787 : 2000

(Page 15, Annex N, clause N-2) — Insert the following Annex P after N-2:

ANNEX P
(Clause 9.2)

TENSILE TEST

P-1 TEST SPECIMEN

The test specimen shall be prepared as per the dimensions given in Fig. 6.

P-1.1 The test specimen shall be cut longitudinally from a length of pipe by either:

- a) Heating and flattening it at a temperature of 125°C to 130°C, then machining it and/or routing it out from the tube wall, in which case the edges of the specimen shall be polished to remove notches, or
- b) Punching it from a section of pipe heated to a temperature of 125°C to 130°C, and subsequently flattening and machining it.

P-2 PROCEDURE

P-2.1 The specimen shall be kept at $23 \pm 1^\circ\text{C}$ for not less than 3 h immediately before testing and the test shall be carried out at $23 \pm 1^\circ\text{C}$.


P-2.2 The mean width and mean thickness of the wasted part of the specimen shall be determined to the nearest 0.01 mm.

P-2.3 The specimen shall be gripped at its widened ends and shall be mounted in the tensile testing machine in axial alignment in the direction of pull. It shall be loaded by separating the grips at a substantially constant rate of 13 ± 2 mm per minute until it breaks. The range of the testing machine being such that the maximum load falls between 15 percent and 85 percent of the maximum scale reading.

P-2.4 The recorded maximum load shall not differ from the true value by more than 1 percent or 1.1 N whichever is greater.

P-2.5 The tensile strength of the specimen shall be calculated from the maximum load and the original area of cross section and shall be expressed in force per unit area.

Amend No. 1 to IS 14787 : 2000

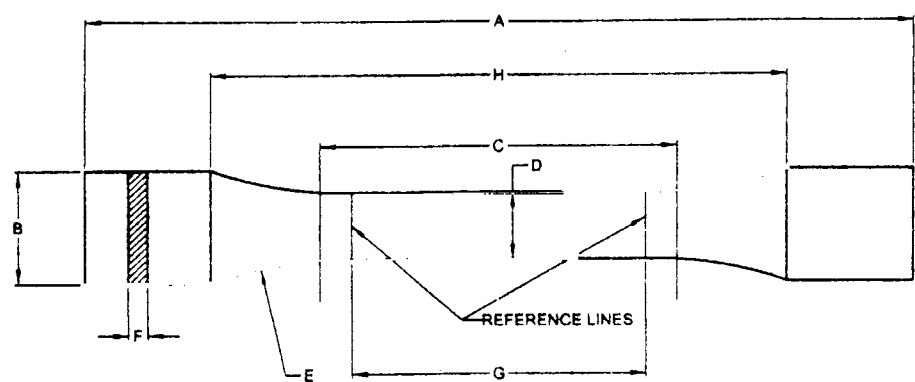

All dimensions are in millimetres.

Overall length, <i>A</i>	150.0 Minimum
Width at ends, <i>B</i>	20.0 ± 0.5
Length of narrow parallel portion, <i>C</i>	60.0 ± 0.5
Width of narrow parallel portion, <i>D</i>	10.0 ± 0.5
Radius, <i>E</i>	60.0 Minimum
Thickness, <i>F</i> Minimum	1.0
Maximum	10.0
Preferred	3.0
Distance between reference lines, <i>G</i>	50.0 ± 0.5
Initial distance between grips, <i>H</i>	115.0 ± 0.5
NOTE — In any one specimen, the thickness of the narrow parallel portion shall nowhere deviate by more than 2 percent from the mean.	

Fig. 6 DIMENSIONS OF TEST PIECE

(Page 16, Annex P, heading) — Substitute 'ANNEX Q' for 'ANNEX P'.

(CED 50)