

AMENDMENT NO. 1 JULY 2001

TO

IS 14846 : 2000 SLUICE VALVE FOR WATER WORKS PURPOSES (50 TO 1 200 mm SIZE) — SPECIFICATION

[Page 2, Table 1, Sl No. (i), col 8] — Substitute '500/7' for '260-300/12 or 500/2' against IS 1865 and add '230-450W' against IS 1030.

[Page 2, Table 1, Sl No. (iii), col 5] — Substitute the existing by '12Cr13/04Cr18Ni10/04cr17Ni12Mo2'.

(Page 4, Table 2) — Substitute the existing Table 2 with the Table 2 appearing on page 2.

(Page 5, Table 3) — Substitute the existing Table 3 with the Table 3 appearing on page 3.

(Page 7, Clause 7.7.3, line 1 and 3) — Substitute 'nut' for 'net'.

(Page 7, Table 3A, Sl No. 2, col 3) — Substitute ' $16^{+2.0}_{-0.0}$ ' for ' $165^{+2.0}_{-0.0}$ '.

(Page 7, Table 4) — Add 'Min' below A, B, C and D.

(Page 8, Fig. 4) — Substitute the existing Fig. 4 by the following:

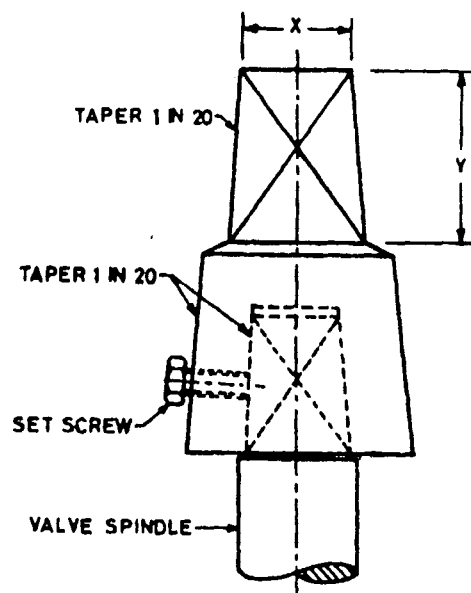


FIG 4 VALVE CAP

(Page 8, clause 7.14) — Insert the following at the end of the clause:

Nominal Size of Sluice Valve (mm)	Size of By Pass Arrangement (mm)
200	25

(Page 9, clause 9.1, lines 3 and 4) — Delete '(both inside and outside)'.

Table 2 Dimensions of Sluice Valves for Nominal Pressure PN 1.0
(Clauses 7.2.4, 7.7.1, 7.9, 7.11, 7.12, 7.13 and Fig. 1A, 1B, 4 and 5)
All dimensions in millimetres.

Sl No.	Nominal Size	BODY			STEM						STUFFING BOX						CAP				
		Length over Flanges 'A'			Width	Overall Height	Squ-are	Length of Square	Dia of Stem	Length from Collar		Collar Thick-ness	Dia of Collar	Depth of Nut	Inside Dia	*Pack-ing Size	No. of Pack-ing	Depth	Size of Hand Wheel	Size of Bottom Square	Length of Square
		PD	ALT-I	ALT-II						L1	L2										
					B Max	H Max	a	C	d Min	(11)	(12)	t	G	K Min	E Min	Min		F Min	D	X	Y
(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)	(9)	(10)			(13)	(14)	(15)	(16)	(17)	(18)	(19)	(20)	(21)	(22)
i)	50	178	250	215	160	365	15	30	22					30	42	10	4	45	225	35	60
ii)	65	190	270	230	215	380	15	30	22					30	42	10	4	45	225	35	60
iii)	80	203	280	230	220	425	15	30	22					30	42	10	4	45	225	35	60
iv)	100	229	300	255	250	470	18	36	27					35	47	10	4	45	320	35	60
v)	125	254	325	266	310	485	18	36	27					35	47	10	5	55	320	35	60
vi)	150	267	350	280	330	595	18	36	27					35	47	10	5	55	320	35	60
vii)	200	292	400	318	460	725	22	42	32					45	56	12	5	65	360	35	60
viii)	250	330	450	355	495	835	25	48	36					50	60	12	5	65	400	35	60
ix)	300	356	500	380	585	910	25	48	36					50	60	12	5	65	400	35	60
x)	350	381	550	—	650	1020	25	45	37					50	61	12	5	65	500	48	75
xi)	400	406	600	—	750	1110	31	54	42					55	66	12	5	65	640	48	75
xii)	450	432	650	—	830	1200	34	64	47					55	75	14	5	75	720	48	75
xiii)	500	457	700	—	900	1300	34	64	47					55	75	14	5	75	720	48	75
xiv)	600	508	800	—	1050	1500	34	64	47					65	94	16	6	100	800	65	100
xv)	700	610	900	1200	1200	1780	44	78	62					70	99	16	6	100	900	65	100
xvi)	750	610	950	1200	1200	1780	48	86	67					70	99	16	6	100	900	65	100
xvii)	800	660	1000	1250	1300	1930	48	86	67					70	99	16	6	100	900	65	100
xviii)	900	711	1100	1380	1400	2080	53	88	77					110	113	18	6	113	900	65	100
xix)	1000	811	1200	1500	1500	2200	53	88	77					110	113	18	6	113	900	65	100
xx)	1100	85	125	1650	1650	2450	63	99	87					115	123	18	6	113	1000	65	100
xxi)	1200	85	125	1800	1800	2580	63	99	87					115	123	18	6	113	1000	65	100

As per manufacturer's design

NOTES

- 1 - PD Preferred dimensions (short body).
 - 2 - ALT I Alternate I dimensions (long body).
 - 3 - ALT II Alternate II dimensions.
 - 4 - S Dimensions given under Alternate II will stand deleted with effect from 01 April 2005.
 - 5 - (SS) As and when ISO stipulates, these dimensions will be notified.
 - 6 - * Packing size represents diameter in case of round and side in case of square shaped packings.
- Tolerances on Length 'A'**
- | | | |
|----------------------------------|--------|-------------------------------------|
| Up to and including 300 mm | ± 2 mm | Tolerances on square, a and X |
| Above 300 and including 600 mm | ± 3 mm | Tolerances on length of square, C |
| Above 600 and including 800 mm | ± 4 mm | Tolerances on size of hand wheel, D |
| Above 800 and including 1 000 mm | ± 5 mm | Tolerances on length of square 'Y' |
| Above 1 000 mm | ± 6 mm | |
- Other Tolerances**
- | |
|----------|
| ± 0.5 mm |
| ± 1.0 mm |
| ± 5.0 mm |
| ± 0.5 mm |

Amendment No. 1 to IS 14846 : 2000

Table 3 Dimensions of Sluice Valves for Nominal Pressure PN 1.6
(Clauses 7.2.4, 7.7.1, 7.9, 7.11, 7.12, 7.13 and Fig. 1A, 1B, 4 and 5)

All dimensions in millimetres.

Sl No.	Nominal Size	BODY		STEM										STUFFING BOX					CAP		
		Length Over Flanges 'A'		Width	Overall Height	Square	Length of Square	Dia of Stem	Length from Collar		Collar Thickness	Dia of Collar	Depth of Nut	Inside Dia	*Packing Size	No. of Packing	Depth	Size of Hand Wheel	Size of Bottom Square	Length of Square	
		PD	ALT-I	ALT-III	B Max	H Max	a	C	Min	L1	L2	t	G	K Min	E Min	Min	F Min	D	X	Y	
(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)	(9)	(10)	(11)	(12)	(13)	(14)	(15)	(16)	(17)	(18)	(19)	(20)	(21)	(22)
i)	50	178	250	215	160	365	15	30	22					30	42	10	4	45	280	35	60
ii)	65	190	270	230	215	380	15	30	22					30	42	10	4	45	280	35	60
iii)	80	203	280	230	220	425	15	30	22					30	42	10	4	45	280	35	60
iv)	100	229	300	255	250	470	18	36	27					35	47	10	4	45	360	35	60
v)	125	254	325	266	310	485	18	36	27					35	47	10	5	55	360	35	60
vi)	150	267	350	280	330	595	18	36	27					35	47	10	5	55	360	35	60
vii)	200	292	400	318	460	725	22	42	32					45	56	12	5	65	450	35	60
viii)	250	330	450	355	495	835	25	48	36					50	60	12	5	65	640	35	60
ix)	300	355	500	380	585	910	25	48	36					50	60	12	5	65	640	35	60
x)	350	381	550	690	730	1030	30	55	42					55	66	12	6	77	640	48	75
xi)	400	406	600	750	800	1110	35	60	47					55	75	14	6	90	730	48	75
xii)	450	432	650	820	850	1210	37	65	52					60	80	14	6	90	800	48	75
xiii)	500	457	700	880	930	1340	37	65	52					60	80	14	6	90	800	48	75
xiv)	600	508	800	1000	1050	1500	42	70	57					60	89	16	6	102	800	48	75

As per manufacturer's design

NOTES

1 - PD Preferred dimensions (short body).

2 - ALT I Alternate I dimensions (long body).

3 - ALT II Alternate II dimensions.

4 - 5 Dimensions given under Alternate II will stand deleted with effect from 01 April 2005.

5 - * Packing size represents diameter in case of round and side in case of square shaped packings.

Tolerances on Length 'A'

Up to and including 300 mm ± 2 mm

Above 300 and including 600 mm ± 3 mm

Above 600 and including 800 mm ± 4 mm

Above 800 and including 1000 mm ± 5 mm

Above 1000 mm ± 6 mm

Other Tolerances

Tolerances on square, a and X ± 0.5 mm

Tolerances on length of square, C ± 1.0 mm

Tolerances on size of hand wheel, D ± 5.0 mm

Tolerances on length of square 'Y' ± 0.5 mm