

AMENDMENT NO. 1 DECEMBER 1992
TO
IS 7092 (Part 2) : 1987 SPECIFICATION FOR
ALUMINIUM ALLOY TUBE FOR IRRIGATION
PURPOSES

PART 2 EXTRUDED TUBE

(Second Revision)

(Aluminium alloy tubes are widely used in sprinkler irrigation systems, which have now become popular even with small farmers. Therefore, need has been felt to standardize the requirements of some additional intermediate sizes on lower side to provide wider choice to small farmers. Accordingly it has been decided to include 63 mm and 90 mm nominal size tubes through this amendment.)

(*Cover page, pages 1 and 3, title*) — Substitute the word 'Tubes' for 'Tube' wherever appears.

(*Page 6, Table 1*) — Substitute the following for the existing Table:

Table 1 Requirements for Drift Expanding Test


(Clause 6.3)

Nominal Size	Outside Diameter	Wall Thickness	Length of Test Piece	Angle of Mandrel	Expanded Inside Diameter
mm	<i>d</i> mm	<i>Min</i> mm	<i>(L)</i> mm	<i>(β)</i> Degree	mm
(1)	(2)	(3)	(4)	(5)	(6)
50	50.8	1.27	100	30	55
63	63.5	1.27	125	30	66
75	76.2	1.27	150	30	81
90	88.9	1.27	175	30	94
100	101.6	1.27	200	30	109
125	127.0	1.32	250	30	136
150	152.4	1.47	300	30	163
175	177.8	1.63	350	30	190
200	203.2	1.83	400	30	217

(*Page 7, Table 2*) — Substitute the table given on page 2 for the existing Table:

Table 2 Dimensions and Tolerances for Extruded Tubes
(Clause 7.1)

All dimensions in millimetres.

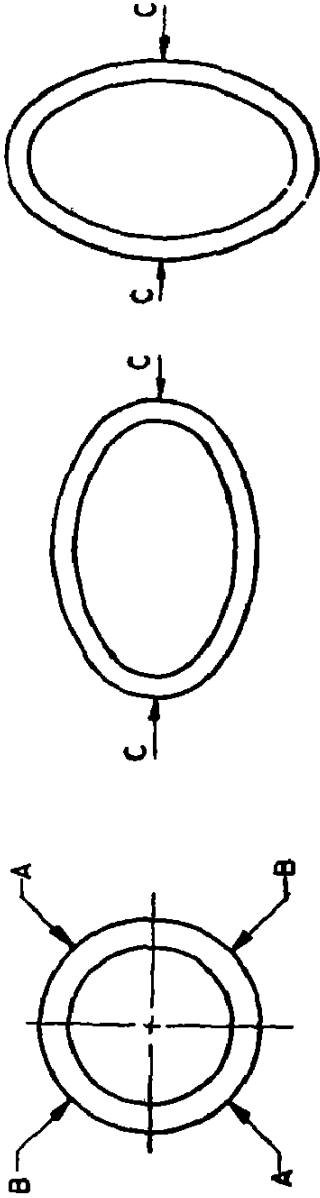

Nominal Size	Outside Diameter	Tolerance on Outside Diameter	Roundness or Ovality Tolerance on Outside Diameter	Wall Thickness Min
(1)	(d)	$1/2 (AA \pm BB) \rightarrow (d)$	CC $\rightarrow (d)$	(5)
50	50.8	± 0.40	± 1.27	1.27
63	63.5	± 0.40	± 1.27	1.27
75	76.2	± 0.40	± 1.27	1.27
90	88.9	± 0.50	± 1.27	1.27
100	101.6	± 0.65	± 1.27	1.27
125	127.0	± 0.65	± 1.65	1.32
150	152.4	± 0.90	± 2.03	1.47
175	177.8	± 0.90	± 2.20	1.63
200	203.2	± 1.15	± 2.55	1.83

NOTE — Tolerances are applicable at the finished end of the tube.

(Page 8 clause 9.1, line 2) — Substitute the word 'or' for 'on'.
(MTD 7)