

AMENDMENT NO. 1 JULY 1983
TO
IS : 1361-1978 SPECIFICATION FOR STEEL
WINDOWS FOR INDUSTRIAL BUILDINGS

(*First Revision*)

Alterations

(*Page 7, clause 5.2*) — Substitute the following for the existing clause:

‘ 5.2 Tolerances — The manufacturing tolerances of the industrial windows shall be such that the overall dimensions as shown in Fig. 1 shall not vary by more than 3 mm ’.

(*Page 7, clause 6.4*) — Substitute the following for the existing clause:

‘ 6.4 Glass panes shall conform to IS : 2835-1977 Specification for flat transport sheet glass (*second revision*) or IS : 5437-1969 Specification for wired and figured glass as may be required. All glass panes shall have properly squared corners and straight edges.

(Page 10, Fig. 3) — Substitute the following for the existing figure:

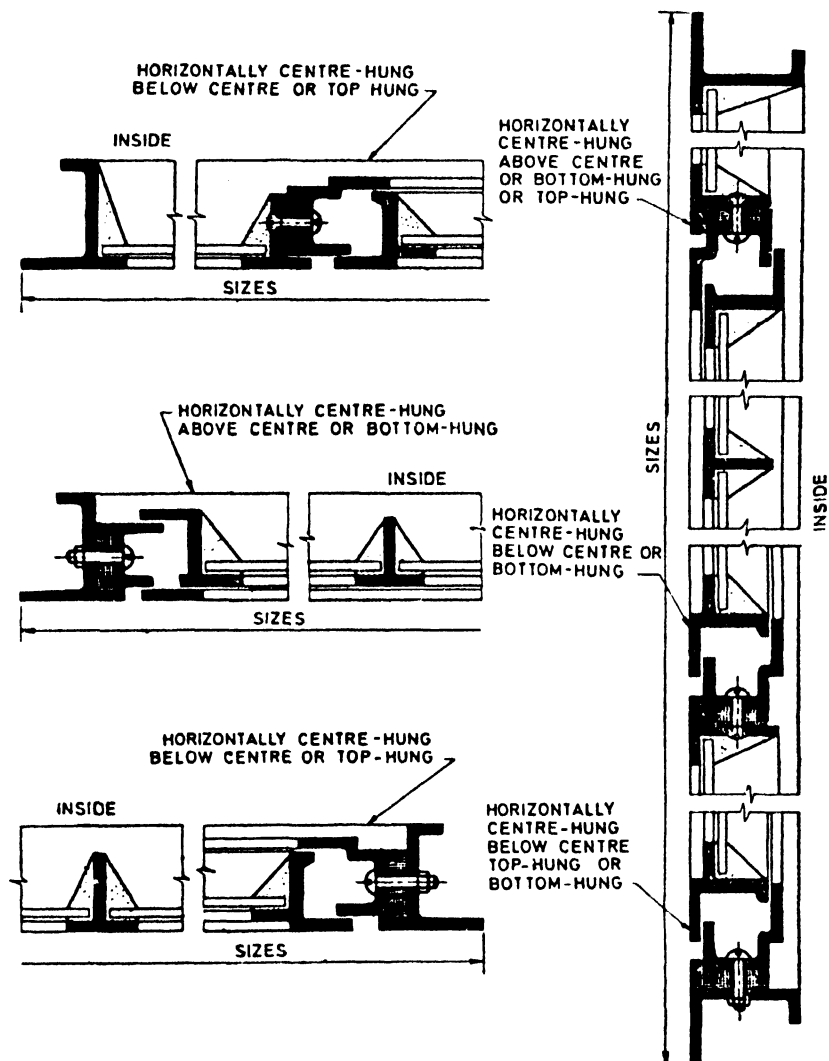


FIG. 3 SECTIONAL DETAILS THROUGH SASHES


(Page 11, clause 8.1) — Substitute the following for the existing clause:

‘8.1 Holes for fixing and coupling sashes shall be provided in the web of the outside frame sections (and of the outer ventilator frame sections

where these occur at the perimeter of the sash) as shown in Fig. 4. These holes shall be of 8 mm diameter, countersunk and shall be located 14 mm from the outside face of the frame section in position as shown in Fig. 5.

(Page 11, clause 9.5, first line) — Substitute 'sherardized' for 'standardized'.

(Page 13, Fig. 5) — Substitute the following for the existing figure:

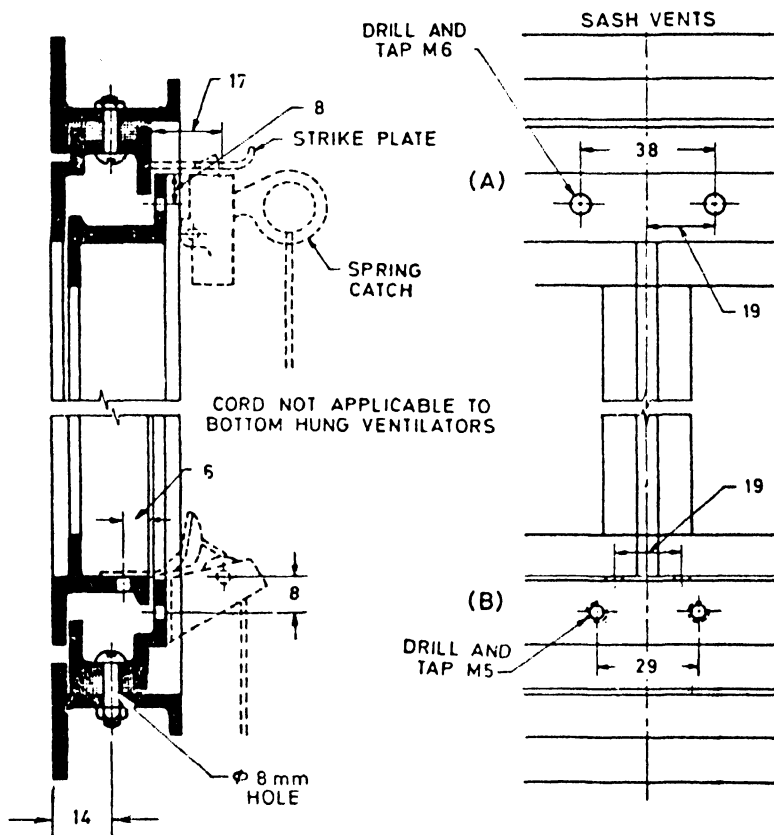

- (A) Preparation for spring catch on horizontally pivoted and bottom hung ventilators
(B) Preparation for pulley and cord-eye on horizontally pivoted ventilators

NOTE — Mastic should be applied to joints where hatching shown.

All dimensions in millimetres.

FIG. 5 SPRING CATCH, PULLEY AND CORD-EYE

(*Page 17, clause 9.9*) — Substitute the following for the existing clause:

‘ 9.9 Two spring glazing clips per pane shall be provided for putty glazing. These shall be made of spring steel to the design shown in Fig. 11.’

(*Page 17, clause 10.1, third line*) — Substitute ‘ 25 mm ’ for ‘ 20 mm ’.

(*Page 17, clause 11.1, second sentence*) — Substitute the following for the existing sentence:

‘ Allowance for clearance has already been made while arriving at the sizes of glass panes given in the table.’

Addenda

(*Page 16, clause 9.7*) — Add the following new matter at the end of 9.7:

‘ Lugs shall be manufactured from 3·15 mm thick mild steel sheet. ’

(*Page 17, clause 9.9*) — Add the following new clause after 9.9:

‘ 9.10 Sashes may also be prepared for bead glazing made from either 9·5 × 9·5 mm aluminium channel of 1 mm thickness or 9·5 × 9·5 mm pressed steel channel of 0·375 to 0·45 mm thick galvanized sheet. Self-tapping screws shall be used for fixing bead or as an alternative bead fixing may be done with concealed screws. Back putty or ‘U’ shaped rubber channel shall be provided for glazing. No spring glazing clip shall be required for bead glazing. ’

(*Page 17, clause 11.1*) — Add the following new clause after 11.1:

‘ 11.1.1 Sashes shall be inside glazed and prepared for putty glazing unless otherwise specified. ’