

AMENDMENT NO. 2 NOVEMBER 1997
TO
IS 3075 (PART 1) : 1986 SPECIFICATION FOR CIRCLIPS
PART 1 FOR SHAFTS

(*First Revision*)

[*Page 6, clause 4.2 (see also Amendment No. 1)*] — Substitute the following table for the existing:

Nominal Diameter of Circlips		Hardness
Over	Up to Including	
—	48	480 to 560 HV (corresponding to 48 to 52 HRC)
48	200	440 to 510 HV (corresponding to 44 to 49 HRC)
200	300	390 to 450 HV (corresponding to 40 to 45 HRC)

NOTE — Hardness values converted as per IS 4258 : 1982 'Hardness conversion tables for metallic materials (first revision)'.

(*Pages 6 and 7, clauses 7.2 to 7.2.2*) — Substitute the following for the existing clauses:

7.2 Bend Test and Twist Test

7.2.1 Bend test

The circlip shall be clamped between two jaws, of which one has a radius equal to the thickness of the circlip as shown in Figure 2A. The circlip is bent through 30° by repeated light hammer blows or with a lever, following which there shall be no fracture or cracks in the circlip. The circlip is then further bent until fracture occurs. The fracture surface shall reveal a fine-grained structure.

7.2.2 Twist test

The circlip shall be clamped so that 3/4 of its diameter is free as shown in the Figure 2B. An equivalent section of the circlip shall be gripped and rotated through 90° following which there shall be no signs of fracture, cracks or similar defects. The circlips shall then be further twisted in the direction until fracture occurs, following which examination of the fracture shall reveal a uniform grain structure with no sign of lamination or other defects.

Amend No. 2 to IS 3075 (Part 1) : 1986

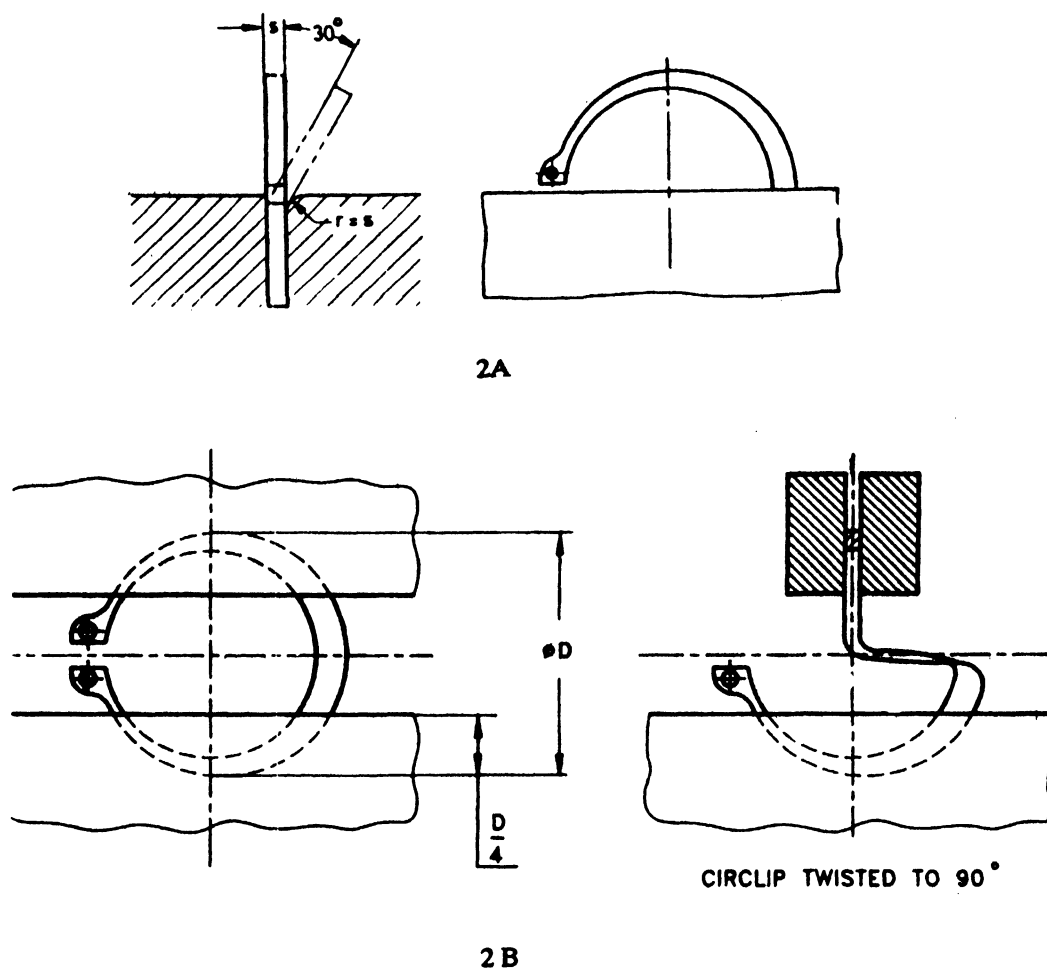


FIG. 2 BEND TEST AND FRACTURE TEST

(Page 7, Fig. 2) — Delete.

(PE 02)