



AMENDMENT NO. 1 MARCH 1973
TO
IS : 5840 (Part II) - 1970 DIMENSIONS OF CATHODE-RAY TUBES
PART II BASES

Addendum



(Page 4, clause 3.3) — Add the following new clause after 3.3:

4. B8H Base (One Pin Omitted)

4.1 Pin Base

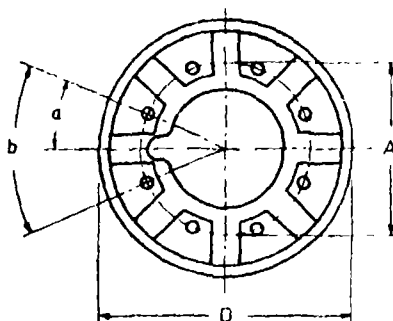

DETAIL OF KEY

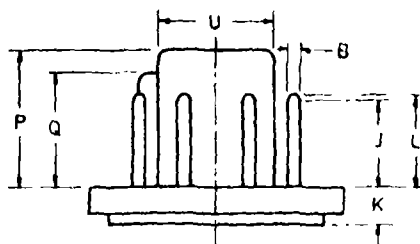

END OF PIN

Reference	Millimetres			Degrees	Note
	Min	Nom	Max		
A	—	15.24	—	—	—
B	0.966	1.016	1.066	—	—
C	0.39	—	0.88	—	1
D	22.51	—	23.21	—	—
E	6.4	—	—	—	6
F	—	3.43	—	—	3
G	—	—	8.45	—	6
H	—	—	0.63	—	2
I	—	—	12.70	—	4.6
J	10.42	—	—	—	4.6
K	—	—	0.51	—	—
L	—	—	1.01	—	—
M	—	—	1.77	—	5
N	1.58	—	—	—	5
O	10.50	—	11.15	—	5
P	2.11	—	2.36	—	—
Q	—	—	—	22 30'	—
R	—	—	—	45°	—
S	—	—	—	—	—
T	—	—	—	—	—
U	—	—	—	—	—
V	—	—	—	—	—
W	—	—	—	—	—
X	—	—	—	—	—
Y	—	—	—	—	—
Z	—	—	—	—	—
a	—	—	—	—	—
b	—	—	—	—	—

Note 1 — This dimension may vary within the limits shown around the periphery of any individual pin. This surface of the pin shall be convex or conical in shape and shall not be brought to a sharp point.

Note 2 — This dimension indicates the maximum flat surface at the end of the pin.

Note 3 — This dimension illustrates current practice and is not regarded as a compatibility feature.

Note 4 — A variant of this base exists where the following dimensions apply:

Dimension P 20.82 mm, Max


Dimension Q 17.53 mm, Min

Note 5 — These dimensions include any necessary taper.

Note 6 — The pin and spigot dimensions are measured from the rim, if present.

Barriers may or may not be present but if present shall not project beyond the rim.
For pin alignment use the gauge as shown in 4.2.

4.2 Pin Alignment Gauge

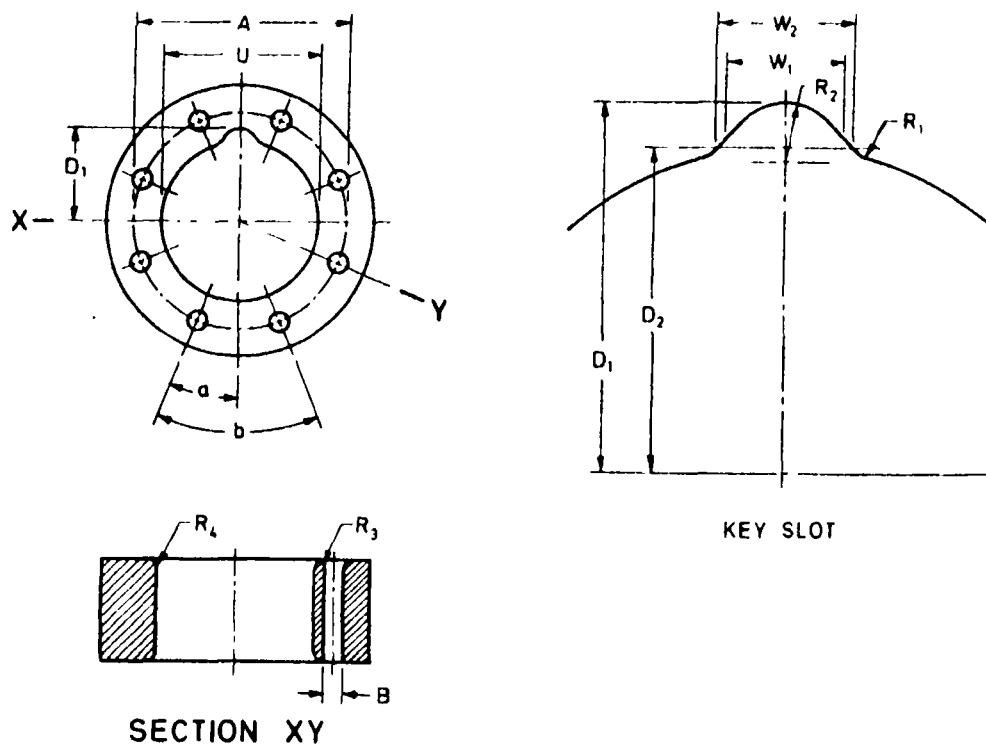

Reference	Millimetres			Degrees	Note
	Min	Nom	Max		
A	—	15.24	—	—	—
B	1.385	1.397	1.409	—	I
D ₁	6.414	—	6.438	—	—
D ₂	5.702 3	—	5.715 0	—	—
R ₁	0.584r	—	0.812r	—	—
R ₂	—	1.19r	—	—	I
R ₃	—	0.13r	—	—	—
R ₄	—	0.79r	—	—	—
T	—	9.53r	—	—	—
U	11.405	—	11.430	—	I
W ₁	2.388	—	2.413	—	—
W ₂	2.616 2	—	2.628 9	—	—
a	—	—	—	22 30'	—
b	—	—	—	45°	—

Note — The holes B have positional tolerance zones 0.020 mm dia.

Datum: Hole U and the slot.

Mounting method is optional