

AMENDMENT NO. 1 NOVEMBER 1993
TO
IS 8167 : 1989 METHOD FOR DETERMINATION OF
REDUCIBILITY INDEX OF IRON OXIDES, LUMP ORE,
SINTER AND PELLETS

(First Revision)

(Page 2, clause 7.3.2, line 2) — Substitute '50' for '15'.

(Page 2, clause 9.3) — Replace the existing matter with the following:

'The reduction tube shall be made of heat-resistant non-scaling metal to withstand temperatures of higher than 950°C. The perforated plate is mounted in the reduction tube for supporting the test portion. The height of the support should be so adjusted that the tube is in the constant temperature zone of the furnace. A typical illustration of reduction tube is shown in Fig. 3 given on next page.'

(Page 2, clause 9.5, line 2) — Substitute '1' for '5'.

(Page 3, clause 10.6, line 2) — Substitute 'four' for 'three'.

Ores and Raw Materials Sectional Committee, MTD 13

FOREWORD

This Indian Standard (First R 1989, after the draft finalized by the Metallurgical Engineeri


This standard was first publish to iron ore pellets also and national Standard.

The reducibility indicates a m removed from iron ore lump, one of the important character in its utilization. This mination of reducibility of iro

This standard differs from IS oxides: lump ores, sinter and dR/dt at 40 percent reduction,

In the preparation of this sta determination of reducibility'

In reporting the result of a te calculated, is to be rounded o off numerical values (revised

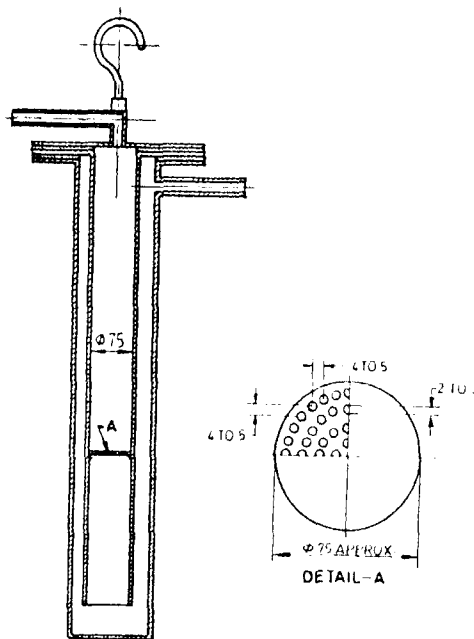

Thickness of plate 4 mm.

FIG. 3 TYPICAL EXAMPLE OF REDUCTION TUBE

(MTD 13)