

AMENDMENT NO. 2 APRIL 1987
TO

IS : 3347 (Part 1/Sec 2)-1979 DIMENSIONS FOR
PORCELAIN TRANSFORMER BUSHINGS FOR
USE IN NORMAL AND LIGHTLY
POLLUTED ATMOSPHERES


PART 1 UP TO AND INCLUDING 1 kV

Section 2: Metal Parts

(First Revision)

(Page 17, Fig. 13, *informal table, col 9*) - Substitute '120' for
'100' against Bushing Rating with Copper Stem 1/3 150.

(Page 18, Fig. 14) — Substitute the figure given on page 2 for the
existing figure.

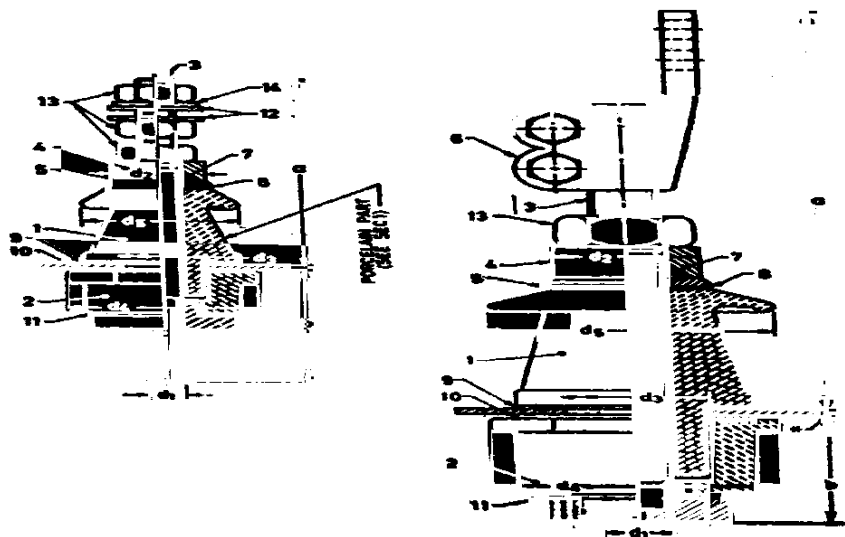

14 A 250 and 630 A

14B 1000, 2000 and 3150A.

- 1. Insulator (top)
- 2. Insulator (bottom)
- 3. Stem
- 4. Washer (top end)
- 5. Washer (stem)
- 6. Connecting lug
- 7. Sealing washer (stem)

- 8. Sealing washer Type M
- 9. General purpose washer
- 10. Gasket X
- 11. Gasket R
- 12. Washer according to IS : 2016-19671
- 13. Nut
- 14. Spring washer Type B according to IS : 3063—1972†

*4 to 8 up to and including 1000 A, and 6 to 10 above 1 000 A.
†Specification for plain washers (first revision).
‡Specification for single coil rectangular section spring washers for bolts, nuts and screws (first revision).

All dimensions in millimetres.

TYPE or STEM (1)	BUSHING RATING kV/A (2)	<i>a</i> Max (3)	<i>b</i> Max (4)	<i>d</i> ₁ (5)	<i>d</i> ₂ (6)	<i>d</i> ₃ (7)	<i>d</i> ₄ (8)	<i>d</i> ₅ (9)
Aluminium	Up to and including 1/250	138	68	M 12 × 2	28	28	60	30
	Up to and including 1/630	263	60	M30 × 2	36	36	110	90
	Up to and including 1/1 000	340	65	M 42 × 3	70	70	125	104
	Up to and including 1/2 000	372	70	M 48 × 3	80	90	150	123
Copper	Up to and including 1/250	138	68	M12	28	28	60	50
	Up to and including 1/630	178	82	M20	40	45	83	70
	Up to and including 1/1 000	263	60	M30 × 2	36	36	110	90
	Up to and including 1/2 000	340	65	M 42 × 3	70	70	123	104
	Up to and including 1/3 150	372	70	M 48 × 3	80	90	130	123

FIG. 14 ASSEMBLY OF BUSHING

(ETDC 3)