

**IS : 6639 - 1972 SPECIFICATION FOR
HEXAGON BOLTS FOR STEEL STRUCTURES**

AMENDMENT NO. 1 APRIL 1978

Addendum

(Page 3, clause 3) - Add the following
new clause after 3:

'3.1 The bolts shall withstand a minimum
shear stress of 260 MPa.


NOTE - The shear stress specified
is explicitly intended for bolt testing
purposes and is not related to actual
design stresses.'

AMENDMENT NO. 2 OCTOBER 1981

Alterations

(Page 1, Table 1):

a) Figure — Substitute the following for the existing figure:

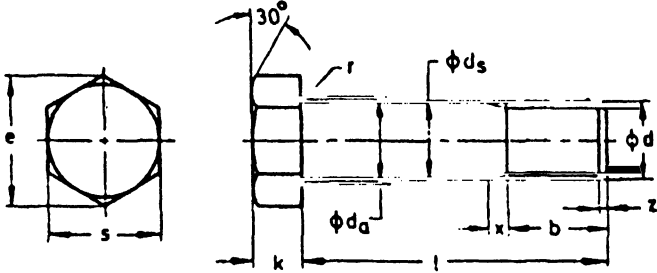

b) First column, heading — Substitute 'Size d' for 'Size'.

c) Entries for Size 'd' — Substitute the following for the existing entries:

	Nom	12	16	20	22	24	27	30	33	36	39
$d_s \pm 1T15$	Max	12.70	16.70	20.84	22.84	24.84	27.84	30.34	34.00	37.00	40.00
	Min	11.30	15.30	19.16	21.16	23.16	26.16	29.16	32.00	35.00	38.00

(Page 2, Table 2):

a) Legend in Figure — Substitute 'DIAMETER OF CLEARANCE HOLE TO CONFORM TO MEDIUM SERIES OF IS : 1821-1967' for 'DIAMETER OF CLEARANCE HOLE TO CONFORM TO FINE SERIES OF IS : 1821-1967'.

b) First column, heading — Substitute 'Size d' for 'Size'.

(EDC 27)