

AMENDMENT NO. 1 JANUARY 2024
TO
IS 6721 : 2023 SANDAL AND SLIPPERS — SPECIFICATION
(First Revision)

(Page 1, clause 4) — Substitute the following for the existing clause:

‘4 SHAPE AND DESIGN

Shape and design of the sandal and slipper may be as decided by the manufacturer or as agreed between manufacturer and purchaser.’

(Page 1, clause 5) — Substitute the following for the existing clause:

‘5 CATEGORY AND TYPE

The sandals and slippers shall be of the following two categories based on their usage:

- a) For kids (standard English sizes for infants and children as per IS 1638); and
- b) For adults (for all other sizes as per IS 1638).

Further, the sandals and slippers for adults shall be of two types namely, Type 1 and Type 2.’

(Page 1, clause 7.6) — Insert the following new clause after 7.6 and renumber the subsequent clauses:

8 REQUIREMENTS FOR COMPLETE SANDAL AND SLIPPER

The sandal or slipper shall conform to the requirements as specified in Table 1.

Table 1 Whole Footwear — Sandal and Slipper

(Clause 8)

SI No.	Characteristic	Requirements			Methods of Test, Ref to
		For Kids ⁵	For Adults		
			Type 1	Type 2	
(1)	(2)	(3)	(4)	(5)	(6)
i)	Bond strength ¹ , N/mm, <i>Min</i> (applicable only for stuck on products, when fore part is fully covered or strap width is more than 25 mm)	1.0 0.7 for material tear	2.5 1.5 for material tear	1.5 1.0 for material tear	IS 15298(Part 1)
ii)	Toe post attachment strength, N, <i>Min</i> (applicable if toe post is present)	40	100	60	Annex C
iii)	Toe ring attachment strength, N, <i>Min</i>	40	80	60	Annex C
iv)	Strap to outsole strength ² N, <i>Min</i>	50	100	60	IS 8085 (Part 11)/ ISO 24263

Price Group 4

Amendment No. 1 to IS 6721 : 2023

SI No.	Characteristic	Requirements			Methods of Test, Ref to
		For Kids ⁵	For Adults		
			Type 1	Type 2	
(1)	(2)	(3)	(4)	(5)	(6)
v)	Attachment strength of back strap and buckle/D-ring N, <i>Min</i> (If, present and functional) (not applicable for slippers)	—	—	—	Annex D
	a) More than 10 mm strap width	40	150	50	
	b) Less than 10 mm strap width	30	100	50	
vi)	Limit of useful extension, percent, <i>Min</i> (if present) (not applicable for slippers)	50	90	60	IS 8085 Part 12)/ ISO 10765
vii)	Attachment strength of back strap and velcro, N, <i>Min</i> (if, present) (not applicable for slippers)	40	100	50	Annex D
viii)	Hydrolysis resistance, <i>Max</i> (applicable for polyester PU sole only)	Cut growth after 30 000 flexes, 6 mm	Cut growth after 150 000 flexes, 6 mm	Cut growth after 50 000 flexes, 6 mm	IS 15298 (Part 1)
ix)	Heel pull off strength, N, <i>Min</i> (applicable for heel height 40 mm and above attached separately to the sandal/slipper)	—	500	300	IS 8085 (Part 10)/ ISO 22650
x)	Inter layer bond strength, N/mm, <i>Min</i> (applicable only for multilayer pasted stuck-on bottom sole)	—	2.5 1.5 for material tear	1.5 1.0 for material tear	IS 15298 (Part 1)
xi)	Slip resistance, coefficient of friction (COF) ³ , <i>Min</i> (not applicable for leather sole) (to be carried out on quarry tiles)	—	0.3	—	Annex E of IS 15844 (Part1)
xii)	Abrasion resistance, (volume loss) mm ³ , <i>Max</i> (not applicable for leather sole)				IS 3400 (Part 3) : 2021/ISO 4649
	a) Cellular (at 5 N force)	1 000	600	1 000	
	b) Solid (at 10 N force),	500	350	500	

Amendment No. 1 to IS 6721 : 2023

SI No.	Characteristic	Requirements			Methods of Test, Ref to
		For Kids ⁵	For Adults		
			Type 1	Type 2	
(1)	(2)	(3)	(4)	(5)	(6)
xiii)	Flexing resistance (Belt method at 90° diameter mandrel) (Not not applicable for leather/other rigid sole ⁴) or Bennewart flex method	No spontaneous crack 10 000 flexes or cut growth 6 mm max at 15 000 flexes	No spontaneous crack 20 000 flexes or cut growth 6 mm max at 30 000 flexes	No spontaneous crack 15 000 flexes or cut growth 6 mm max at 20 000 flexes	IS 8085 (Part 4) /ISO 16177 Annex D of IS 15844 (Part 1)
xiv)	Chemical Requirements ⁶	All the components of sandal and slipper which are in direct contact of foot shall comply with Table 1 of IS 17011 for critical substances Category I and Category II as specified under 3.6 of IS 17011	All the components of sandal and slipper which are in direct contact of foot shall comply with Table 1 of IS 17011 for critical substances Category I and Category II as specified under 3.6 of IS 17011	All the components of sandal and slipper which are in direct contact of foot shall comply with Table 1 of IS 17011 for critical substances Category I and Category II as specified under 3.6 of IS 17011	Table 1 of IS 17011
xv)	Lead content (as Pb) ⁷ ppm, <i>Max (applicable only for PVC)</i>	2	2	–	IS 12240 (Part 5)

¹ Strip material cut for bond strength shall be 25 mm.

² This test shall be carried out for toe strap to outsole and rear strap to outsole, if present.

³ This test shall be carried out for both Condition A (forward heel slip) and Condition B: (backward forepart slip) at both dry and wet condition and in all cases shall meet the values as prescribed at sl no. (xi) of Table 1.

⁴ If the manufacturer declares a sole as rigid sole, the flexing test shall not be applicable for footwear whose angle under the applied force is lower than 45 Å° from the horizontal, when tested for rigidity test as per IS 15298 (Part 1).

⁵ In case of Infant Standard English sizes 1 to 4 as per IS 1638, only chemical requirements as specified as sl no. (xiv) shall be tested.

⁶ In case of Type 2 and kids except infants (as specified in Note 5), this test shall be kept in abeyance till 31st December 2024.

⁷ To be tested only If PVC is used in manufacturing of sandal/slipper.

(Page 1, clause 8) — Substitute the following for the existing clause:

‘9 OPTIONAL REQUIRMENTS FOR COMPONENTS

The tests for the various components used in the manufacture of sandal or slipper as given in clauses **8.1, 8.2, 8.3** and **8.4** shall be optional and may be tested. The characteristics to be tested and the requirements specified against them are given for guidance purpose only.’

Amendment No. 1 to IS 6721 : 2023

(Page 2, Table 1) — Substitute the following table for the existing table:

Table 2 Upper (Raw Material Requirement) — All Materials

(Clause 8.1)

SI No.	Characteristic	Requirement			Methods of Test, Ref to
		For Kids	For Adults		
			Type 1	Type 2	
(1)	(2)	(3)	(4)	(5)	(6)
i)	Tear strength, N, <i>Min</i> a) Other than moulded upper material	—	30	15	Method B of IS 7016 (Part 3/Sec 1)/ ISO 4647-1 or IS 8085 (Part 9)/ ISO 17696 (for non-leather), and IS 5914 (Part 5/ Sec 2)/ISO 3377-2 (for leather)
	b) For all moulded upper material	—	15	7	
ii)	Flexing endurance	—	No crack at 75 000 flexes	—	IS 8085 (Part 20)/ ISO 17694

Amendment No. 1 to IS 6721 : 2023

(Page 2, Table 2) — Substitute the following table for the existing table:

Table 3 Insole Covering (Raw Material Requirement) — Applicable to Textile, Coated Fabric, Leather and Micro-fibre

(Clause 8.2)

SI No.	Characteristic	Requirement			Method of Test
		For Kids	For Adults		
			Type 1	Type 2	
(1)	(2)	(3)	(4)	(5)	(6)
i)	Tear strength, N, <i>Min</i>	—	30	—	Method B of IS 7016 (Part 3/Sec 1)/ISO 4674-1 or IS 8085 (Part 9)/ ISO 17696
ii)	Abrasion resistance				
	a) At dry condition	—	No hole formation at 12 800 cycles	No hole formation at 6 400 cycles	IS 8085(Part 6)/ ISO 17704
	b) At wet condition	—	No hole formation at 3 200 cycles	No hole formation at 3 200 cycles	

(Page 3, Table 3) — Substitute the following table for the existing table:

Table 4 Lining — Raw Material Requirement — All Materials

(Clause 8.3)

Sl No.	Characteristic	Requirement			Methods of Test
		For Kids	For Adults		
			Type 1	Type 2	
(1)	(2)	(3)	(4)	(5)	(6)
i)	Tear strength, N, <i>Min</i>	—	10	—	IS 5914 (Part 5/Sec 2)/ ISO 3377-2 (for leather) Method B of IS 7016 (Part 3/Sec 1)/ISO 4674-1 (for non-leather)
ii)	Abrasion resistance				
	a) At dry condition	—	No hole formation at 12 800 cycles	No hole formation at 6 400 cycles	IS 8085 (Part 6) : /ISO 17704
	b)At wet condition	—	No hole formation at 3 200 cycles	No hole formation at 3 200 cycles	

Amendment No. 1 to IS 6721 : 2023

(Page 3, Table 4) — Substitute the following table for the existing table:

Table 5 Outsole (Leather) Requirement

(Clause 8.4)

Sl No.	Characteristic	Requirement			Methods of Test
		For Kids	For Adults		
			Type 1	Type 2	
(1)	(2)	(3)	(4)	(5)	(6)
i)	Grain crack index	–	> 16	> 16	IS 5914 (Part 7)/ISO 3378
ii)	Density, g/cm ³ , <i>Min</i>	–	0.90	0.90	IS 5914 (Part 4)/ ISO 2420
iii)	Abrasion resistance, mm/kcs	–	a) Good: < 3.0 b) Moderate: 3.1 to 7.0 c) Poor: > 7.0	a) Good: < 3.0 b) Moderate: 3.1 to 7.0 c) Poor: > 7.0	Annex B

(Page 3, Table 5) — Substitute the following table for the existing table:

Table 6 Outsole (Materials Other Than Leather)

(Clause 8.4)

Sl No.	Characteristic	Requirements			Method of Test, Ref to
		For Kids	For Adults		
			Type 1	Type 2	
(1)	(2)	(3)	(4)	(5)	(6)
i)	Density, g/cm ³ , <i>Min</i> a) Cellular b) Solid	— —	< 0.90 ≥ 0.90	< 0.90 ≥ 0.90	IS 3400 (Part 9) /ISO 2781

(Page 5, clause 9.1) — Substitute the following for the existing clause:

‘10.1 Marking

The sandal and slipper shall be marked legibly with the following:

- Size;
- Type; and
- Identification of the source of manufacturer or brand name.

NOTE — Kids sandal and slipper shall be marked as ‘0’ whereas infants sandal and slipper shall be marked as ‘00’.

(Page 5, clause 9.3, first line) — Substitute ‘may’ for ‘shall’.

(Page 5, clause 10) — Delete.

(Page 7, B-5.1, second line) — Substitute ‘27 °C ± 2 °C and (65 ± 5) percent relative humidity’ for ‘23 °C ± 2 °C and (50 ± 5) percent relative humidity’.

(Page 8, C-3.3, first line) — Delete ‘Pneumatic’.

(Page 9, C-5.1, second line) — Substitute ‘27 °C ± 2 °C and (65 ± 5) percent relative humidity’ for ‘23 °C ± 2 °C and (50 ± 5) percent relative humidity’.

Amendment No. 1 to IS 6721 : 2023

(Page 9, **C-5.1**, *eighth line*) — Insert '[If required hold the sample from the toe post as shown in Fig. 2(B)]' after machine.

(Page 9, **C-5.1**, *last line*) — Substitute 'Fig. 2(A), 2(B) and Fig. 3' for 'Fig. 2 and Fig. 3'.

(Page 9, Fig. 2) — Substitute 'Fig. 2(A) and 2(B)' for 'Fig (2)'.

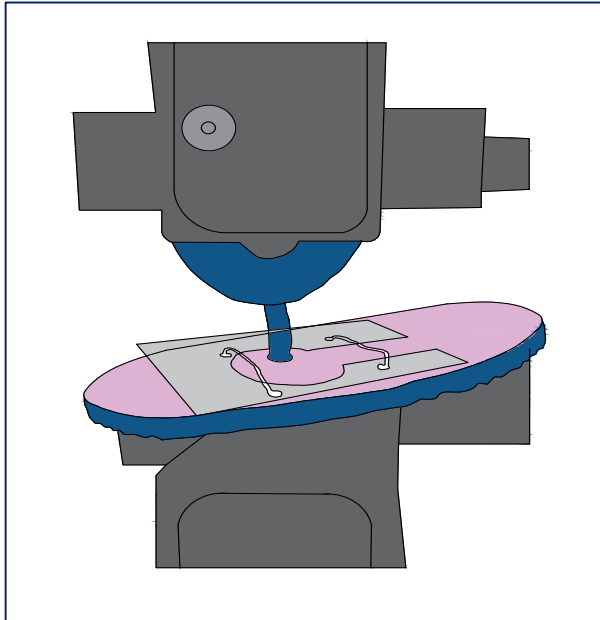


FIG. 2(A)

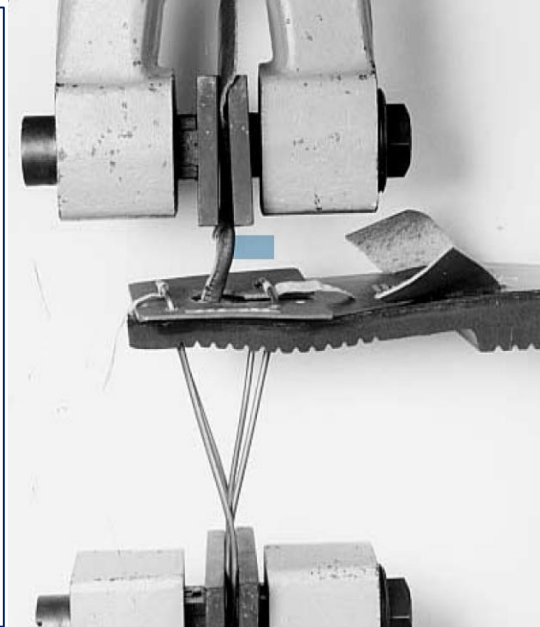


FIG. 2(B)

FIG. 2(A) AND 2(B) ILLUSTRATION DIAGRAM FOR CLAMPING OF TOE POST STRAP IN THE TENSILE MACHINE