

AMENDMENT NO. 1 JANUARY 1987 TO IS : 4995 (Part 1) - 1974 CRITERIA FOR DESIGN OF REINFORCED CONCRETE BINS FOR THE STORAGE OF GRANULAR AND POWDERY MATERIALS

PART 1 GENERAL REQUIREMENTS AND ASSESSMENT OF BIN LOADS


(First Revision)

(Page 10, clause 6.1.1.2) — Substitute the following for the existing formula:

$$\sum_0^z P_w = \pi D W R \left[z - z_{ee} (1 - e^{-z/z_{ee}}) \right]$$

(Page 12, clause 6.2.3, Note) — Add 'm/h' as unit under ν , in the informal table given in the Note.

(Page 13, Fig. 4) — Substitute the following for the existing figure:

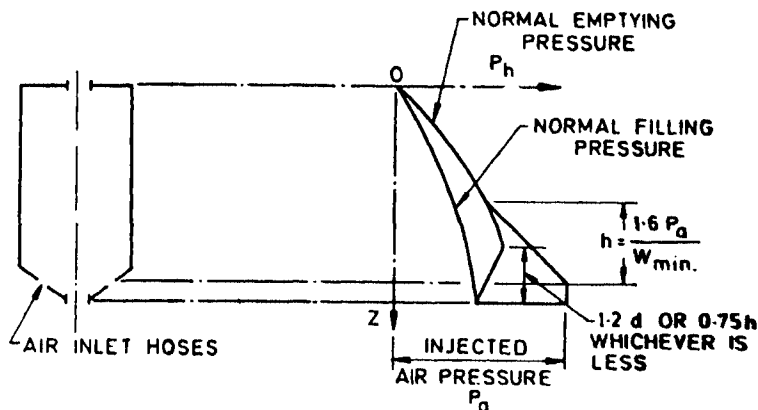

W_{min} = Minimum bulk density of the stored material.

FIG. 4 PRESSURE SCHEME DURING PNEUMATIC EMPTYING

(Page 15, clause 6.3.3.3) — Substitute the following for the existing clause:

‘6.3.3.3 Bins for storage of powdery materials are often equipped with devices for pneumatic emptying and when these devices are used for aeration of stored material, loosening of the material in the region of the outlet occurs. In this case, no significant increase in load due to the air supply has so far been detected.

(B3C 38)