

AMENDMENT NO. 3 MAY 1976
TO
IS : 6297 (Part I)-1971 SPECIFICATION FOR
TRANSFORMERS AND INDUCTORS (POWER,
AUDIO, PULSE AND SWITCHING) FOR
ELECTRONIC EQUIPMENT

PART I GENERAL REQUIREMENTS AND TESTS

(This supersedes Amendment No. 2)

Addenda

(Page 10, clause 6.2.1.7, second paragraph) — Add the following after the second paragraph:

‘The limiting current for the test equipment shall not exceed 2 mA for transformers up to 2 kVA power rating. However, for transformers whose output voltage is greater than 2 800 V peak or the power rating is higher than 2 kVA, any other current value may be agreed upon between the manufacturer and the purchaser.

The value of the limiting current shall be included in the test report.’

(Page 12, clause 6.2.3.2) — Add the following new clause after 6.2.3.2 and re-number the subsequent clauses and figures accordingly wherever they appear:

6.2.3.3 Centre tap balance test (for centre tapped winding) — The balance of centre tapped winding shall be checked by connecting the transformer as shown in Fig. 2.

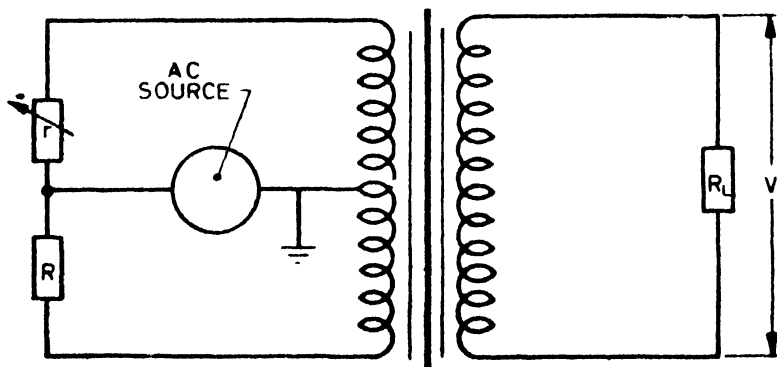


FIG. 2 ARRANGEMENT FOR CENTRE TAP BALANCE TEST

The resistor r shall be adjusted until voltage V across the load R_L goes through minimum. The limits shall be as specified when calculated from the formula:

$$\text{Change of voltage in } dB = 20 \log_{10} \frac{R}{r - R} \quad)$$

(ETDC 38)