

**AMENDMENT NO. 1 JUNE 2005
TO
IS 6523 : 1983 SPECIFICATION FOR
PRECAST REINFORCED CONCRETE DOOR AND
WINDOW FRAMES**

(First Revision)

(Page 3, clause 0.2, first sentence) — Substitute the following for the existing

'The increasing scarcity and high cost of good timber has considerably increased the utility of precast reinforced cement concrete door and window frames, which are not only durable and termite proof but also appreciably economical and easy to manufacture '

(Page 3, clause 0.4) — Insert the following new para after 0.4.

'0.5 A scheme for labelling environment friendly products known as ECO Mark has been introduced at the instance of the Ministry of Environment and Forests (MEF), Government of India. The ECO Mark would be administered by the Bureau of Indian Standards (BIS) under the *BIS Act*, 1986 as per the Resolution No. 85 (E) dated 21 February 1991 and No. 589 (E) dated 10 June 1992 published in the *Gazette of the Government of India*. For a product to be eligible for marking with ECO logo, it shall also carry the ISI Mark of BIS besides meeting additional optional environment friendly requirements. For this purpose, the Standard Mark of BIS would be a single mark being a combination of the ISI Mark and the ECO logo. Requirements to be satisfied for a product to qualify for the BIS Standard Mark for ECO friendliness will be optional, manufacturing units will be free to opt for the ISI Mark alone also.

This amendment is based on the Gazette Notification No. 170 dated 18 May 1996 for substitutes for Wood Building Materials as environment friendly products published in the *Gazette of the Government of India*.'

(Page 3, clause 0.5) — Renumber clause '0.5' as '0.6'


(Page 4, clause 2.1) — Add the following Note

NOTE 3 — A slight slope for ease in demoulding may be provided in frame cross section as shown in Fig. 1A and 1B.'

Amend No. 1 to IS 6523 : 1983

(Page 4, clause 3.3, line 3) — Substitute 'M 25' for M 20'

(Pages 6 and 7, Fig 1A and 1B) — Substitute the following Fig. 1A and 1B for the existing

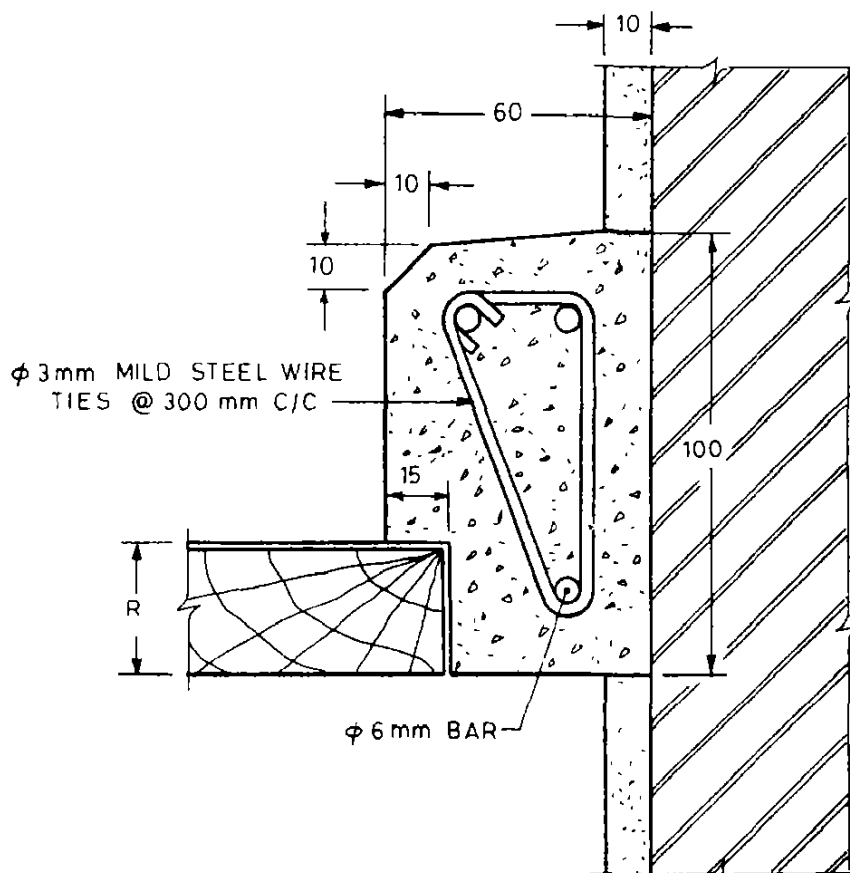


$R = 30, 35$ or 40 mm depending upon the thickness of shutter

1A Typical Cross Section of Precast Reinforced Concrete Door and Window Frame
Showing Reinforcement

FIG 1 REINFORCED CONCRETE DOOR AND WINDOW FRAME — Contd

Amend No. 1 to IS 6523 : 1983

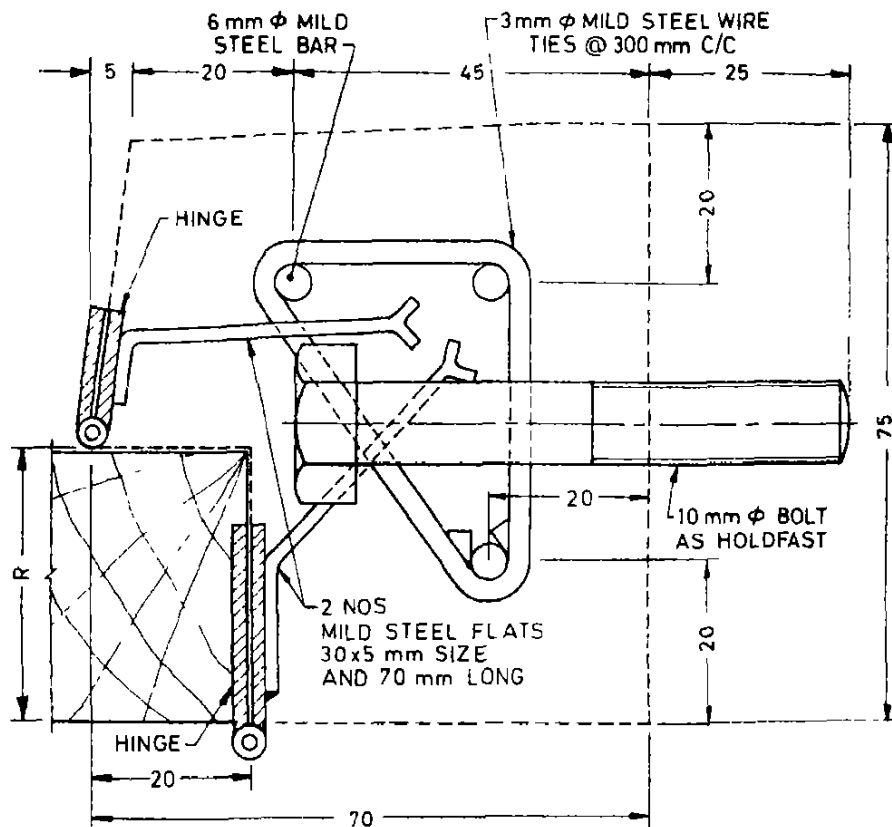

$R = 30, 35$ or 40 mm depending upon the thickness of shutter

NOTE — Instead of bolts for holdfast, mild steel rod 10 mm dia may be embedded in concrete and the projected pieces may be bent after casting

1B Alternative Details of Precast Reinforced Concrete, Door and Window Frame Showing Arrangement for Reinforcement, Holdfasts and Hinges

All dimensions in millimetres

FIG 1 REINFORCED CONCRETE DOOR AND WINDOW FRAME

Amend No. 1 to IS 6523 : 1983

(Page 8, clause 4.2.1, line 2) — Substitute '15 mm' for '12 mm'

(Page 14, clause 7.3) — Insert the following matter after 7.3 and renumber the subsequent clauses

8 OPTIONAL REQUIREMENTS FOR ECO MARK

8.1 General Requirements

8.1.1 The products shall conform to the requirements for quality and performance as specified in the standard

8.1.2 The product manufacturer must produce the consent clearance from the concerned State Pollution Control Board as per the provisions of *Water (Prevention and Control of Pollution) Act, 1974* and *Air (Prevention and Control of Pollution) Act, 1981* and *Water (Prevention and Control of Pollution) Cess Act, 1977* along with the authorization, if required under *Environment (Protection) Act, 1986* and the Rules made thereunder to BIS while applying for ECO Mark appropriate with enforced Rules and Regulations of the Forest Department

8.1.3 The product or product packaging may display in brief the criteria based on which the product has been labelled environment friendly.

8.1.4 The material used for product packing (if any) shall be recyclable, reusable or biodegradable

8.2 Specific Requirements

8.2.1 Door and window frames used for buildings shall be made from reinforced cement concrete

NOTE — The manufacturer shall provide documentary evidence by way of certificate or declaration to this effect to BIS while applying for ECO Mark

[Page 16, clause 10.1(c)] — Add the following after 10.1(c)

'd) The criteria for which the product has been labelled with ECO Mark (if ECO marked)'

(CED 53)

Reprography Unit, BIS, New Delhi, India