

AMENDMENT NO. 3 MARCH 2000
TO
IS 897 : 1982 SPECIFICATION FOR TUNGSTEN
FILAMENT ELECTRIC LAMPS FOR RAILWAY
ROLLING STOCK

(*Second Revision*)

(Page 5, clause 4.1.2) — Insert the following sub-clause after 4.1.2:

'4.1.2.1 Eccentricity of glass shell with respect to cap axis shall be within ± 3 mm.'

(Page 6, Table 2, see also Amendment No. 1) — Substitute the following for the existing:

Table 2 Dimensions of Lamps
(Clause 4.1.2, and Fig. 3 to 5)

Rated Voltage	Rated Wattage	Light Centre Length	Maximum bulb Diameter	Maximum Overall Length* Including Solder	Figure Reference Number
(1) V	(2) W	(3) mm	(4) mm	(5) mm	(6)
24/32	15	Actual	46	70 $\pm$ 2	
	20	overall	46	70 $\pm$ 2	
	30	length -1/2 bulb diameter	46	70 $\pm$ 2	
32	250	80 $\pm$ 3	81	121	3
75	25	—	53	72	4
	50	—	61	110	5
	15	—	30	62	4
110/ 120	25	—	61	103.5	4
	40	—	61	110	5
	60	—	61	110	5
	100	95 $\pm$ 2	71	121	—
* When screw cap E-27/27 is used, the maximum overall length may be correspondingly increased.					

Amend No. 3 to IS 897 : 1982

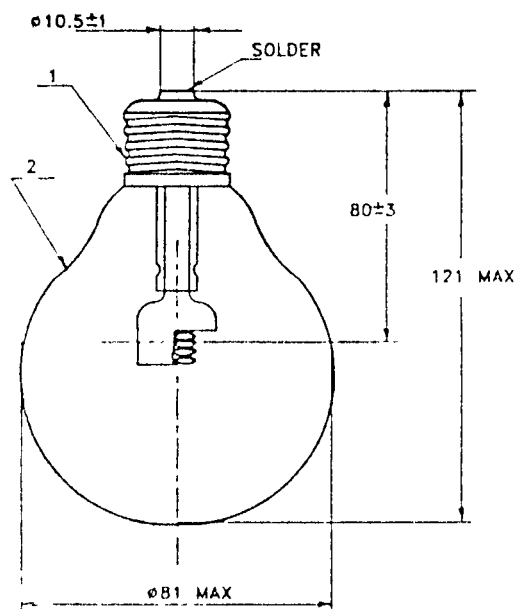


FIG. 3 DIMENSION OF LAMPS 32 V, 250 W

Amend No. 3 to IS 897 : 1982

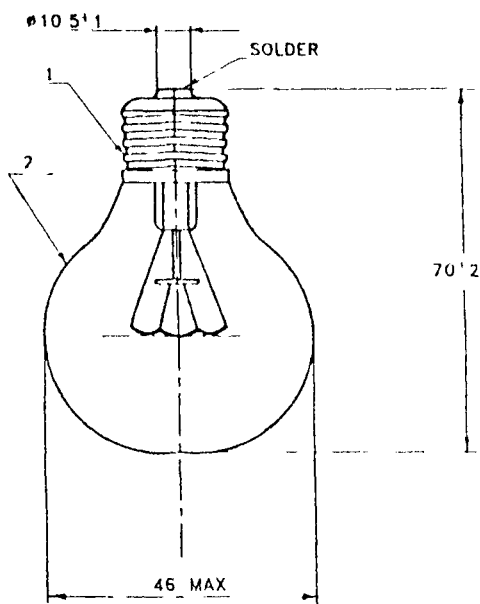


FIG. 4 DIMENSIONS OF LAMPS 24/32V, 15, 20 AND 30 W

Amend No. 3 to IS 897 : 1982

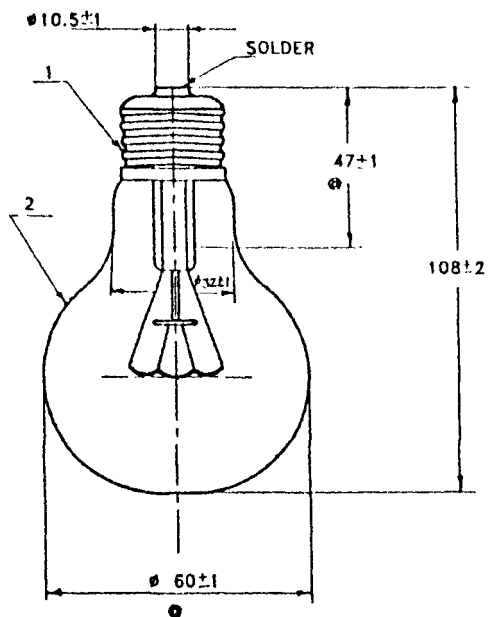


FIG. 5 DIMENSIONS OF LAMPS 110/120 V, 40 AND 60 W

Amend No. 3 to IS 897 : 1982

(Page 10, clause 7.5) — Substitute the following for the existing:

'7.5 Insulation Resistance of Bayonet Caps — The insulation resistance between the shell of the bayonet cap and the contact shall be not less than 5 megohms. The test shall be carried out immediately after the ageing of the lamp (approximately one hour at rated voltage) to ensure proper drying and the measurement shall be made one minute after the application of dc voltage of 500 V.'

(Page 10, clause 7.5.1) — Delete.

(Page 13, clause 7.8) — Substitute the following for the existing:

'7.8 The lamp shall be subjected to vibration as per the method given in IS : 9000 (Part 8) : 1981 'Basic environmental testing procedure for electronic and electrical items: Part 8 Vibration (sinusoidal) test.

NOTES

1. The specific requirements for the test is under consideration.
2. The data regarding vibration encountered on railway rolling stocks is as follows:

Type	Acceleration		Frequency	
	Vertical	Lateral	Vertical	Lateral
Coaches	0.75 to 2.25 g	0.03 to 0.11 g	1 to 10 c/S	1 to 10 c/S
Locomotives	1.0 to 2.0 g	0.6 to 0.9 g	4 to 30 c/S	4 to 35 c/S'

(ETD 23)