

AMENDMENT NO. 1 DECEMBER 2022

TO

**IS 8953 : 2006 62 PERCENT ALUMINA BRICKS AND BLOCKS FOR BLAST
FURNACE — SPECIFICATION**

(First Revision)

[Page 1, clause 5 a)] — Substitute the following for the existing:

‘Chipped corners and edges:

- i) The dimensions of the defect/damage on the corners and edges shall not exceed the following:

For Corner damage: $a + b + c \leq 50 \text{ mm}$ (*see* Fig. 1)

For Edge damage: $d + e + f \leq 50 \text{ mm}$ (*see* Fig. 1)

NOTE — If two of the dimensions are less than 5 mm, the damage will be ignored.

- ii) An item shall have no more than two damages, corner and/or edge.’

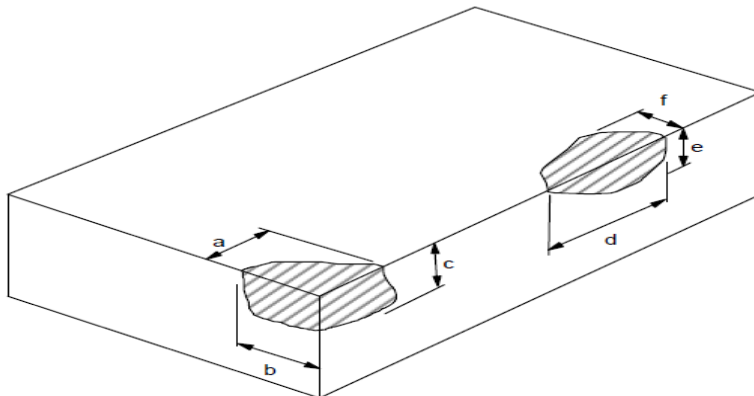


Figure 1

[Page 1, clause 5 d)] — Substitute the following for the existing:

‘Iron Spot:

- i) The dimensions of iron spots on the refractory bricks and blocks shall not exceed the following:

On Hot face: Diameter $\leq 5 \text{ mm}$; Depth $\leq 4 \text{ mm}$ (pit)

On Other surfaces: Diameter $\leq 9 \text{ mm}$; Depth $\leq 4 \text{ mm}$ (pit)

- ii) The maximum number of such spots (caused by concentration of iron) allowable per brick shall be 8.'

(MTD 15)