

AMENDMENT NO. 2 JUNE 1991
TO
IS 6071 : 1986 SPECIFICATION FOR
SYNTHETIC SEPARATORS FOR LEAD-ACID
BATTERIES
(first Revision)

(Page 6, clause 13) — Substitute the following for 'Under consideration':

13.1 The test shall be carried out by the method given in Appendix H.

13.2 The separator shall not break or fracture due to impact of steel ball.'

(Page 20, clause G-1.3) — Insert the following Appendix at the end:


A P P E N D I X H
(Clause 13.1)

MECHANICAL STRENGTH TEST

H-1 The specimen separator shall be clamped in the jig with ribs, if any, being on the lower side (*see* Fig. 9).

H-2 A steel ball of 12.7 mm dia weighing 8.3 ± 0.2 g is dropped vertically from a height of 200 mm.

NOTE — The tube shall be so adjusted that the steel ball falls between the ribs, if any, of the separator (ribs facing downwards).

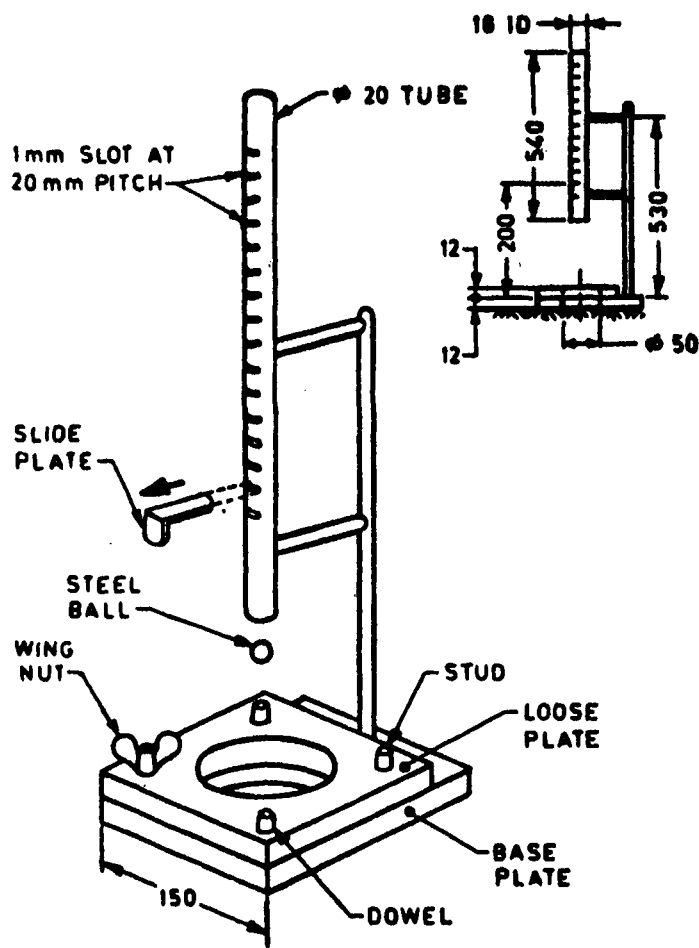

All dimensions in millimetres.

FIG. 9 SEPARATOR IMPACT Test APPARATUS

(ETD 11)