

AMENDMENT NO. 1 MAY 2023
TO
IS 17483 (PART 2) : 2020 GEOSYNTHETICS — GEOCELLS — SPECIFICATION
PART 2 SLOPE EROSION PROTECTION APPLICATION

(*Second cover page, Foreword*) — Insert the following after para 5:

The committee has reviewed the provisions of the following International Standard/Other publication referred in this standard and has decided that these are acceptable for use in conjunction with this standard:

<i>International Standard/ Other publication</i>	<i>Title</i>
ASTM D 5885 : 2017	Standard test method for oxidative induction time of polyolefin geosynthetics by high-pressure differential scanning calorimetry

(*Page 1, clause 3.1, Note*) — Substitute following for existing note:

‘NOTE — The profile of geocells are generally curvilinear rhomboidal structures [*see* Fig. 1 and Fig. 2 (a)].’

(*Page 1, Fig. 2*) — Substitute the following figures for existing:

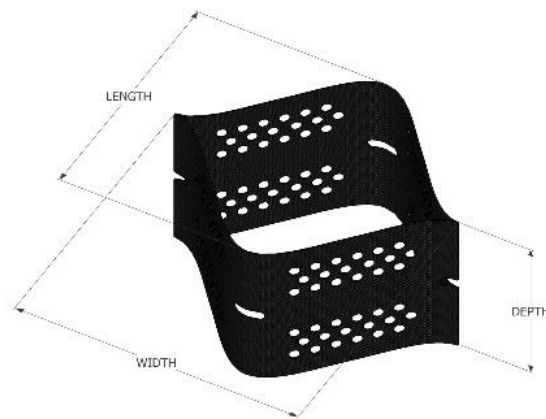


FIG. 2 (a) INDIVIDUAL EXPANDED CELL

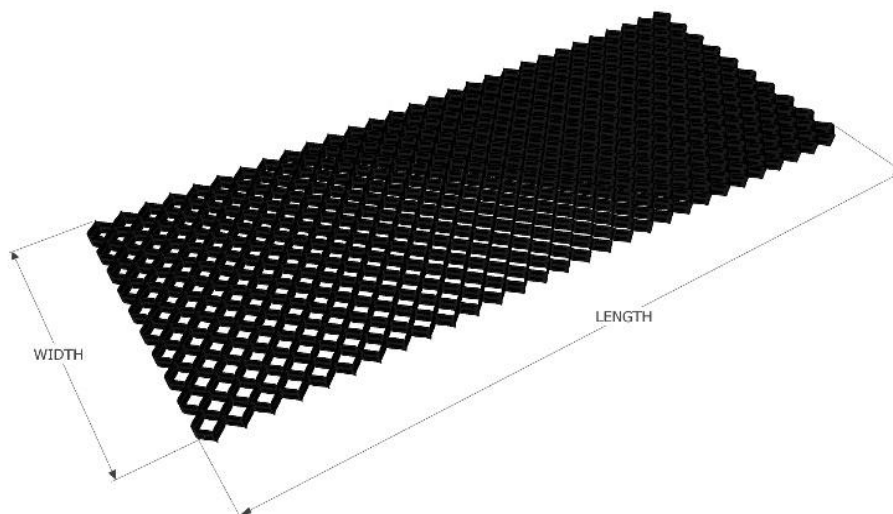


FIG. 2 (b) EXPANDED GEOCELL PANEL

Price Group 2

Amendment No. 1 to IS 17483 (Part 2) : 2020

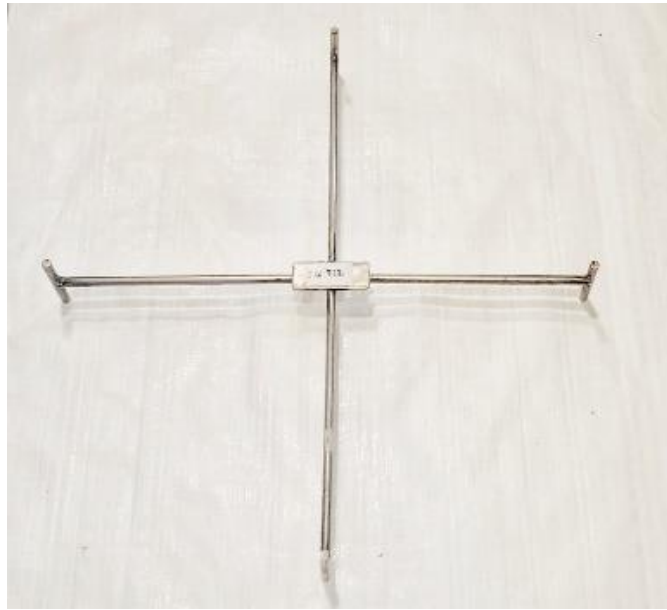


FIG. 2 (c) TEMPLATE TO MEASURE EXPANDED DIMENSIONS

(Page 1, clause 3.1) — Insert the following new clause after 3.1:

‘3.2 Style Number — A theoretical number given to geocell which refers to geocell with specific designed pocket size (mm) and cell depth (mm). For example, ‘a × b’ type geocell refers, geocell having ‘a’ mm geocell pocket size and ‘b’ mm cell depth.’

(Page 1, clause 5.2, first sentence) — Substitute the following for the existing sentence:

‘Geocells used for slope erosion protection control, shall have a depth ranging from 75 mm to 125 mm (*see* Note) and final geocell pockets size ranging from 445 mm to 712 mm, when measured by using template as shown in Fig. 2 (c). The expanded individual geocell and geocell panel are shown in Fig. 2 (a) and Fig. 2 (b) respectively for illustration.’

(Page 2, clause 5.3, second sentence) — Substitute the following for the existing sentence:

‘The indentations shall have a surface density of 22 to 32 per cm², when measured by using magnifying glass with minimum magnification of 10X.’

(Page 2, clause 5.5) — Substitute the following for existing clause:

‘5.5 Seam Weld

The adjoining strips that form the geocell panel shall be welded ultrasonically. The seam weld thus formed shall be uniform [*see* Fig. 5 (a)]. For uniform seam strength, ultrasonic weld melt pool width shall be 10 mm maximum [*see* Fig. 5 (b)].

(Page 2, Fig. 5) — Substitute following figures for existing:

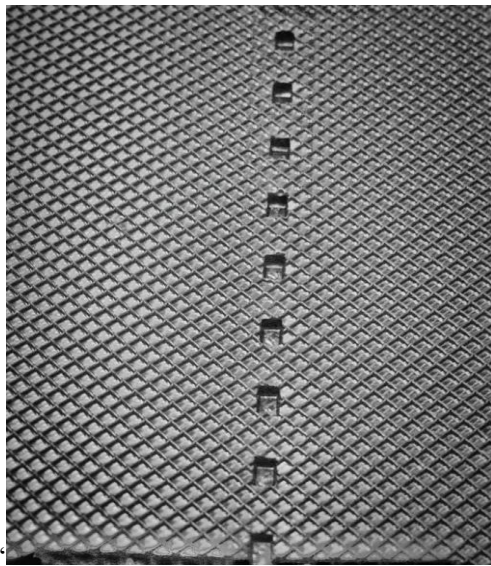


FIG. 5 (a) ULTRASONIC SEAM WELD

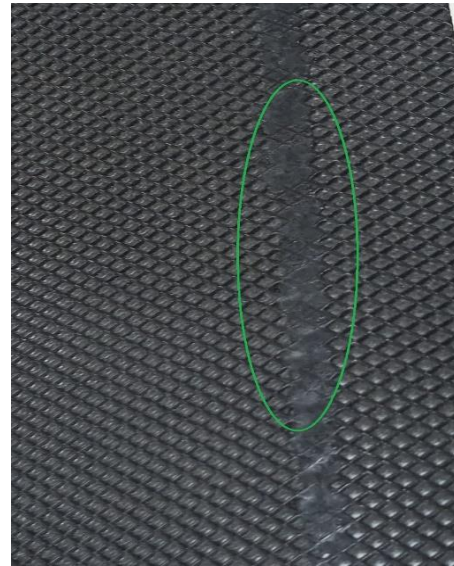


FIG. 5 (b) ULTRASONIC WELD MELT POOL

(Page 2, clause **5.2.1**) — Delete.

[(Page 3, Table 1, *Sl No.* (xii), *col* (4)] — Substitute ‘ASTM D 5885’ for ‘ISO 11357-6’.

(TXD 30)