

## AMENDMENT NO. 1 MARCH 2024

### TO

### IS 17526 : 2021 DOMESTIC STAINLESS STEEL VACUUM FLASK/BOTTLE — SPECIFICATION

(Page 2, clause 5.3, second sentence) — Substitute the following for the existing:

‘The welding electrode shall conform to grade 308 L (07Cr18Ni9) as per IS 5856.’

(Page 2, clause 7.1.1) — Substitute the following for the existing:

‘The materials used to manufacture the inner containers shall be stainless steel of grade 304 as per IS 5522 or 316/316L as per IS 6911.’

(Page 2, clause 7.1.2, second sentence) — Substitute the following for the existing:

‘The material used for the outer container shall be of stainless steel as per N2 grade of IS 15997 or 304 grade of IS 5522.’

(Page 2, clause 7.1.3, second para) — Add the following new para at the end of the second para:

‘The shore hardness of O-ring, and washer shall be in the range 45 to 55 IRHD/Shore A when tested as per ISO 48-2/ ISO 48-4. The O-ring, washer and stopper shall be free of Bisphenol A (BPA) when tested as per IS 14625.’

(Page 2, clause 7.1.4) — Substitute the following for the existing:

‘The auxiliary closure(s) (if provided), also intended for use as drinking cup(s), shall be non-toxic, food grade material and shall not deform under normal conditions of use (see IS 9845). The materials shall not contain BPA, when tested as per IS 14625.’

(Page 2, clause 7.3, first sentence) — Substitute the following for the existing:

‘The nominal capacities may be declared one amongst up to 150 ml to 2 500 ml. Any other nominal capacities may be as agreed to between the purchaser and the manufacturer, subject to meeting the requirements of this standard.’

(Page 2, clause 7.4) — Insert the following sentence at the end of the clause:

‘Separate bottle shall be used for conducting this test.’

(Page 2, clause 7.5, first sentence) — Substitute the following for the existing:

‘The temperature of water cooled to 5 °C and kept in flask/bottle, in accordance with the method prescribed in Annex B when measured at intervals of 1 h, 6 h, 12 h and 24 h respectively, shall be not greater as given in Table 2. Separate bottle shall be used for conducting this test.’

**Price Group 2**

**Amendment No. 1 to IS 17526 : 2021**


[Page 3, Table 1, col 2, Sl No. i)] — Substitute ' $\leq 150 - 250$ ' for ' $150 - 250$ '.

(Page 3, Table 2) — Substitute the following for the existing:

**Table 2 Cold Retention Capability**  
(Clause 7.5)

| Sl No. | Capacity of the Inner Container (ml) | Temperature Attained Not More Than ( $^{\circ}\text{C}$ ) for Narrow Mouth |               |                |                | Temperature Attained Not More Than ( $^{\circ}\text{C}$ ) for Wide Mouth |               |                |                |
|--------|--------------------------------------|----------------------------------------------------------------------------|---------------|----------------|----------------|--------------------------------------------------------------------------|---------------|----------------|----------------|
|        |                                      | After 1 hour                                                               | After 6 hours | After 12 hours | After 24 hours | After 1 hour                                                             | After 6 hours | After 12 hours | After 24 hours |
| (1)    | (2)                                  | (3)                                                                        | (4)           | (5)            | (6)            | (7)                                                                      | (8)           | (9)            | (10)           |
| i)     | $\leq 150 - 250$                     | 8                                                                          | 13            | 18             | 23             | 9                                                                        | 14            | 19             | 26             |
| ii)    | 251 - 500                            | 8                                                                          | 11            | 16             | 20             | 9                                                                        | 12            | 17             | 23             |
| iii)   | 501 - 750                            | 7                                                                          | 10            | 14             | 19             | 8                                                                        | 11            | 15             | 21             |
| iv)    | 751 - 1 000                          | 7                                                                          | 10            | 14             | 18             | 8                                                                        | 11            | 15             | 20             |
| v)     | $> 1\ 000$                           | 7                                                                          | 9             | 14             | 18             | 7                                                                        | 10            | 15             | 20             |

(Page 4, Fig. 1) — Substitute the following for the existing:

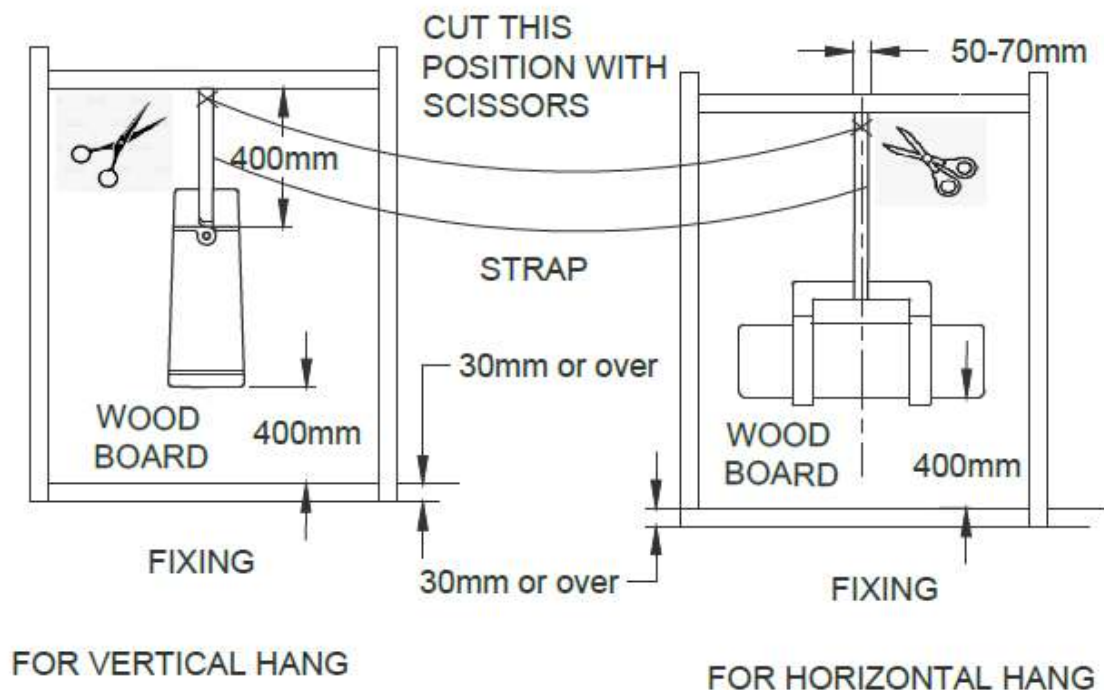

**FIG. 1 DROP IMPACT TEST**

(Page 5, clause 7.8.1.2) — Substitute 'After/during this test, the cord shall not break. The area on the flask/bottle to which the cord is fastened shall not show any signs of damage or defect.' for 'After/during this test, the strap shall not break. The area on the flask/bottle to which the strap is fastened shall not show any signs of damage or defect.'

(Page 5, clause 7.10, line 1) — Substitute the following for the existing:

‘The dry empty flask/bottle without stopper or plug or lever’

(Page 6, clause 7.14) — Insert the following new sub clause:

**‘7.15 Endurance Test for O-Ring, Washer and Stopper**

The flask after the test at 7.4 shall be subjected to this test.

**7.15.1** Inspect the O-ring, washer and stopper for any defects with naked eyes or corrected vision. There shall be no defects.

**7.15.2** Open and close the flask 2 500 times.

**7.15.3** Inspect the O-ring, washer and stopper for any defects with naked eyes or corrected vision. There shall be no defects.

**7.15.4** The flask shall pass the tests as per 7.4, 7.5 and 7.9.’

(Page 9, clause A-2.1, Note 2, line 2) — Substitute ‘1 N-m’ for ‘0.1 N-m’.

(Page 9, clause B-1, first sentence) — Substitute the following for the existing:

‘The cold retention capacity of an inner container is determined by filling cold water at 5 °C in it in the manner prescribed below and measuring the temperature of water at intervals of 1 h, 6 h, 12 h and 24 h respectively. While carrying out the test, maintain the atmospheric conditions at  $(27 \pm 2)$  °C and  $(65 \pm 5)$  percent RH.’

(Page 9, clause B-2.1, third sentence) — Substitute the following for the existing:

‘Note the temperature of water in the inner container at the end of 1 h, 6 h, 12 h and 24 h respectively’.

(Page 9, clause B-2.1, Note 2, line 2) — Substitute ‘1 N-m’ for ‘0.1 N-m’.

(Page 9, clause B-2.2) — Substitute the following for the existing:

‘The flasks/bottles shall be taken as having passed the test, if the temperatures measured at the end of 1 h, 6 h, 12 h and 24 h shall not be greater than those specified in 7.5.1.’