

AMENDMENT NO. 1 AUGUST 2023
TO
IS 17566 : 2021 KEY LOCKS FOR SECURITY EQUIPMENT — SPECIFICATION

(Page 2, clause 5.4.3) — Substitute the following for existing:

‘5.4.3 The difference between dimension ‘Y’ of gate of the lever and thickness ‘X’ of bolt stump in the direction perpendicular to bolt movement shall be specified as below.

5.4.3.1 In case of locks consisting of bolt stump and levers with linear gate, rotating about pivot pin, the following conditions shall apply:

- a) Difference (Y-X) shall not be more than 1 mm if $R \leq 1.5$; and
- b) Difference (Y-X) shall not be more than 2 mm if $R > 1.5$.

where

$R = B/K$;

B = Distance between centre of lever pivot axis and farthest edge of lever gate opening; and

K = Distance between centre of lever pivot axis and keyhole centre.

NOTE — Representative sketches 1, 2 and 3 below, indicate the possible design variations.

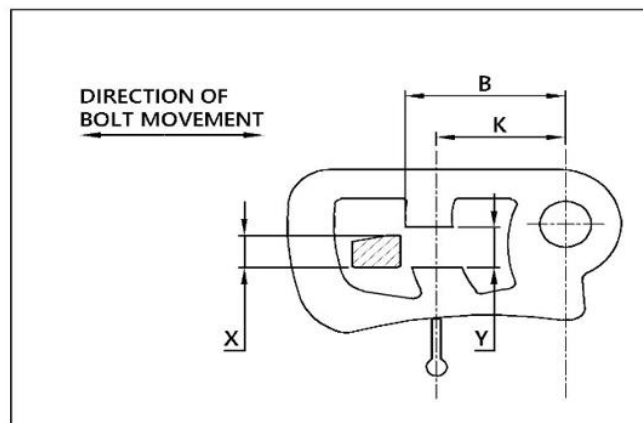


FIG. 1 LEVER GATE AND KEYHOLE ARE NEARLY ALIGNED ($R \leq 1.5$)

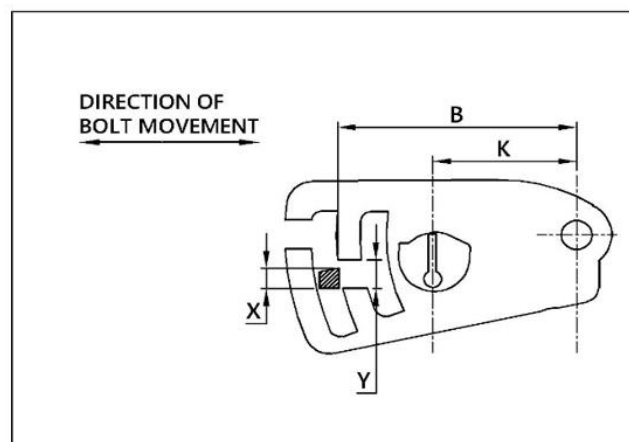


FIG. 2 LEVER GATE AWAY FROM KEYHOLE ($R > 1.5$)

Price Group 1

Amendment No. 1 to IS 17566 : 2021

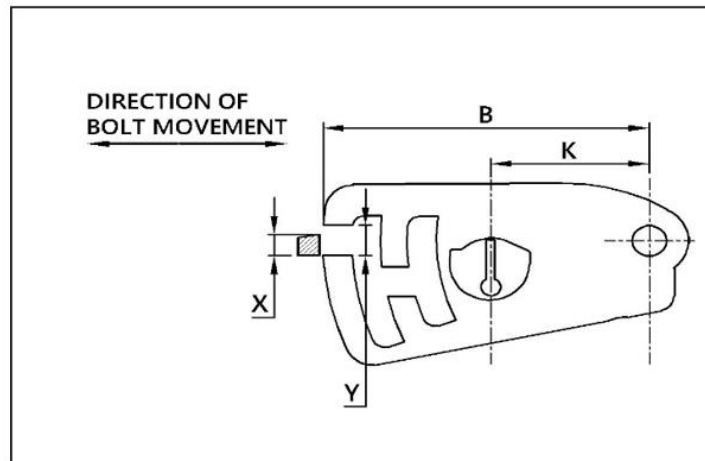


FIG. 3 LEVER GATE FURTHER AWAY FROM KEYHOLE ($R \gg 1.5$)

5.4.3.2 In case of locks consisting of bolt stump and levers with linear gate, which move perpendicular to bolt movement (not rotating about any pivot), the difference ($Y-X$) shall not be more than 1 mm.

5.4.3.3 In case of locks with design other than gate and stump concept, this requirement of difference ($Y-X$) does not apply.'

(Page 3, clause 8.2.2, para 1, line 2) — Substitute 'Fig. 4' for 'Fig. 1'.

(Page 3, clause 8.2.4, para 1, line 2) — Substitute 'Fig. 5' for 'Fig. 2'.

(Page 3, clause 8.2.6, para 1, line 2) — Substitute 'Fig. 6A' for 'Fig. 3a'.

(Page 3, clause 8.2.7, para 1, line 3) — Substitute 'Fig. 6B' for '(Fig. 3b)'.

(Page 3, clause 8.4, para 1, line 2) — Substitute 'Fig. 7' for 'Fig. 4'.

(Page 4, Fig. 1) — Substitute 'Fig. 4' for 'Fig. 1'.

(Page 4, Fig. 2) — Substitute 'Fig. 5' for 'Fig. 2'.

(Page 4, Fig. 3A) — Substitute 'Fig. 6A' for 'Fig. 3A'.

(Page 4, Fig. 3B) — Substitute 'Fig. 6B' for 'Fig. 3B'.

(Page 5, Fig. 4) — Substitute 'Fig. 7' for 'Fig. 4'.