

AMENDMENT NO. 4 DECEMBER 2012

TO

**IS 9206 : 1979 DIMENSIONS OF CAPS FOR TUNGSTEN
FILAMENT GENERAL SERVICE ELECTRIC LAMPS**

[Page 4, clause 2.1 (a)] — Substitute the following for the existing:


'a) B-22/25 X 26 and Table 1'
B-22/23 X 26

(Page 4, Table 1) — Substitute the following for the existing Table 1:


Table 1 Dimensions of Normal Bayonet
CAP B-22/25 X 26 and B-22/23 X 26
(Clause 2.1)

All dimensions in millimetres.


The drawing is intended only to illustrate the dimensions essential for interchangeability.

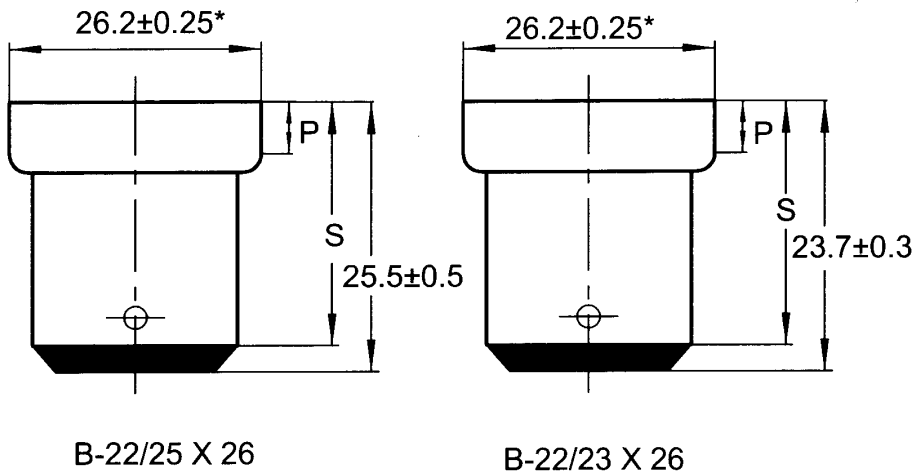



Amend No. 4 to IS 9206 : 1979

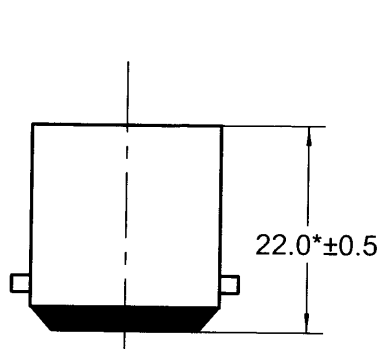

B22d/22

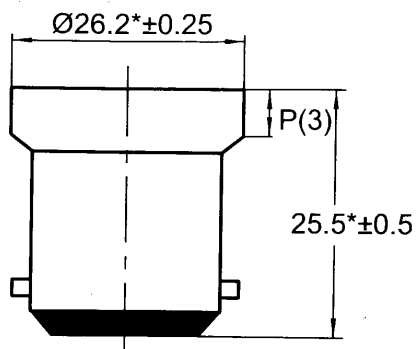

B-22d/25 X 26

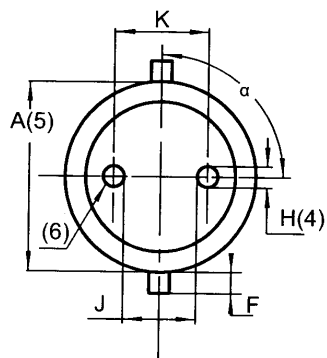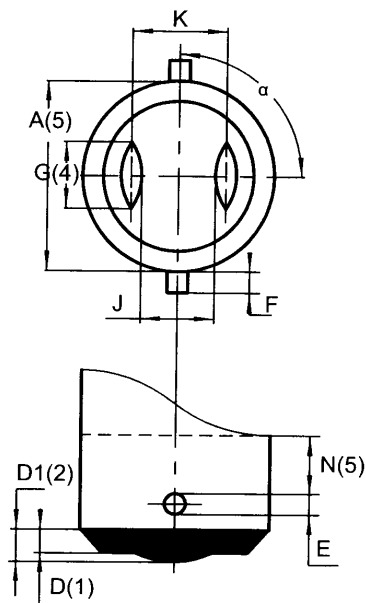

Amend No. 4 to IS 9206 : 1979

The drawings shown above are purely informative for the purpose of rationalization.

Dimension	Minimum	Maximum
A(5)	21.75	22.15
D*(1)	6.0	6.8
D1 (2)	-	8.0
E	1.8	2.2
F	2.3	2.7
G (4)	10	-
H (4)	4.8	-
J	1.7	-
K*	10.3	10.5
N	6.7	
P* (3)	7.5	8.5
α^*	88°	92°

* This dimension is solely for cap design and is not to be gauged on the finished lamp.

NOTES

- 1 Dimension D is applicable to unmounted cap only.
- 2 Dimension D1 is applicable to caps on finished lamps only. The contact making surfaces shall protrude beyond the insulation surface.
- 3 Dimension P denotes the length over which the skirt shall be cylindrical.
- 4 The dimension is checked with the millimeter scale.
- 5 Dimension N denotes the length over which both the minimum and maximum limits of dimension A shall be observed. Below dimension N, only the limits of dimension A maximum apply.
- 6 In the area where the contact of the lamp holder may land on the insulation surface of caps with round contacts during insertion into the lamp holder, this surface shall be shaped in such a way as to allow the holder contacts to easily reach the intended operating position.

(ETD 23)

Reprography Unit, BIS, New Delhi, India