# CORRIGENDUM

# ETS 300 207-1

**June 1995**

Source: ETSI TC-SPS

Reference: T/S 46-33R

ICS: 33.080

**Key words:** ISDN, supplementary service

**This corrigendum modifies**
**the European Telecommunication Standard ETS 300 207-1 (1994)**

# Integrated Services Digital Network (ISDN); Diversion supplementary services; Digital Subscriber Signalling System No. one (DSS1) protocol; Part 1: Protocol specification

**ETSI**

European Telecommunications Standards Institute

**ETSI Secretariat**

**Postal address:** F-06921 Sophia Antipolis CEDEX - FRANCE
**Office address:** 650 Route des Lucioles - Sophia Antipolis - Valbonne - FRANCE
**X.400:** c=fr, a=atlas, p=etsi, s=secretariat - **Internet:** secretariat@etsi.fr

Tel.: +33 92 94 42 00 - Fax: +33 93 65 47 16

**Copyright Notification:** No part may be reproduced except as authorized by written permission. The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 1995. All rights reserved.

New presentation - see History box

Whilst every care has been taken in the preparation and publication of this document, errors in content, typographical or otherwise, may occur. If you have comments concerning its accuracy, please write to "ETSI Editing and Committee Support Dept." at the address shown on the title page.

## Foreword

This corrigendum corrects several editorial mistakes and inexactitudes in the first edition of ETS 300 207-1.

## Amendments

**Page 11, clause 5, fourth paragraph**

Delete "on a number":

An indication that a call forwarding supplementary service is activated ~~on a number~~ may, as a subscription option, be given to the forwarding user who has forwarding activated, each time an outgoing call is made.

**Page 12, table 1, last row**

Add "all" to the last subscription option:

| Subscription option | Value | Applicability |
|---|---|---|
| ⋮ | ⋮ | ⋮ |
| Activation, deactivation and interrogation for all ISDN-numbers on the same access (in case of subscription on a per ISDN number basis) (note 2) | No | CFU<br>CFB<br>CFNR |
| | Yes | |
| ⋮ | | |

**Page 13, table 2**

Modify table 2 as follows:

| Network provider option | Value | Applicability |
|---|---|---|
| Served user call retention on invocation of diversion (forwarding or deflection) | Retain call until alerting begins at the diverted-to user | CFNR<br>CD<br>(note 1) |
| | Clear call on invocation of diversion | |
| The maximum number of diversions for a single call | Maximum number of diverted connections (with an upper limit of 5) | CFU<br>CFB<br>CFNR<br>CD |
| Call forwarding on no reply timer | Timer duration shall be a network provider option | CFNR |
| Partial rerouteing provided at the T reference point (note 2) | Yes | CFU<br>CFB |
| | No | CFNR<br>CD |
| The call-by-call indication overrides the value of the subscription option "Diverting number is released to the diverted-to user" | Yes | CD |
| | No | |
| NOTE 1: This option also applies for call diversion by partial rerouting.<br>NOTE 2: Partial rerouteing can be invoked by the private network towards the public network when the CFU, CFB, CFNR or CD supplementary services are invoked in the private network. | | |

**Page 38, subclause 9.2.5.1, note**

Modify the note as follows:

NOTE: As a network provider option the prefix is added to the number. In this case the ~~diverted-to number~~ type of number field of the Redirecting number information element is coded "unknown".

**Page 45, subclause 10.6, last paragraph, first sentence**

Modify the first sentence as follows:

For invocation and operation of the call ~~forwarding~~ diversion supplementary services at the T reference point, the procedures of subclause 9.2.4 shall apply except that, if the forwarding user has subscribed to the direct dialling in supplementary service the ~~diverting~~ forwarding network shall include the Called party number information element containing the called user's number in the FACILITY message.

**Pages 61 to 68, figure 7 (sheets 1 to 4) and figure 8 (sheets 1 to 4), note**

Modify the respective notes as follows:

NOTE: The SDL diagram for the coincident S and T reference point is also applicable at the T reference point (i.e. as referenced in subclause 10.6). ~~with the exception of the SDL diagram for the CD supplementary service.~~

**Page 71, figure A.3**

Modify figure A.3 as follows:

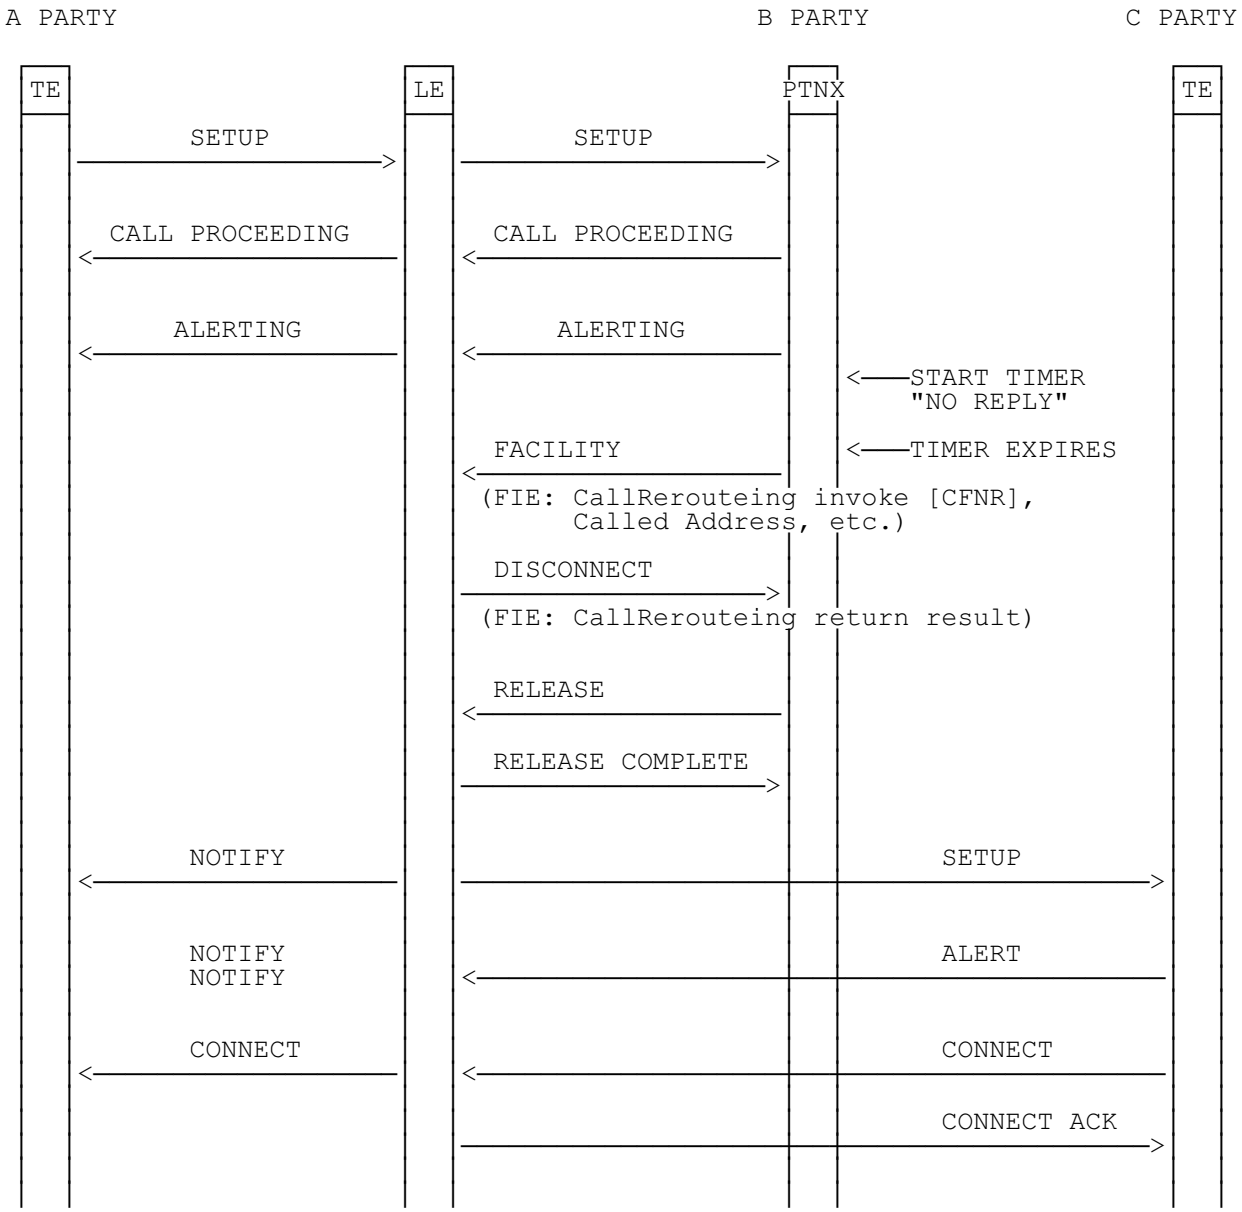

## History

| Document history | |
|---|---|
| December 1994 | First Edition of ETS 300 207-1 |
| June 1995 | Corrigendum to First Edition of ETS 300 207-1 |
| | |
| | |
| | |