ETSI TS 103 878-1 V1.1.1 (2025-05)



Core Network and Interoperability Testing (INT);
Network Interoperability Test Description for
IPv6-only services over 5G;
Part 1: Test purposes

Reference
DTS/INT-00193

Keywords
5G, IPv6, TP

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° w061004871

Important notice

The present document can be downloaded from the
ETSI Search & Browse Standards application.

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format on ETSI deliver repository.

Users should be aware that the present document may be revised or have its status changed,
this information is available in the Milestones listing.

If you find errors in the present document, please send your comments to
the relevant service listed under Committee Support Staff.

If you find a security vulnerability in the present document, please report it through our

Coordinated Vulnerability Disclosure (CVD) program.

Notice of disclaimer & limitation of liability

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.
No recommendation as to products and services or vendors is made or should be implied.
No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.
In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.
The content of the PDF version shall not be modified without the written authorization of ETSI.
The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2025.
All rights reserved.

Contents

Intellectual Property Rights 4
Foreword 4
Modal verbs terminology 4
1 Scope 5
2 References 5
2.1 Normative references 5
2.2 Informative references 5
3 Definition of terms, symbols and abbreviations 6
3.1 Terms 6
3.2 Symbols 6
3.3 Abbreviations 6
4 Test Configurations 7
4.1 General 7
4.2 Test configuration 7
5 Test Suite Structure (TSS) 8
5.1 Structure for IPv6 only services over 5G test purposes 8
6 Test Purposes (TP) 9
6.1 General 9
6.1.1 Test strategy 9
6.1.2 TP naming convention 9
6.1.3 TP structure 10
6.2 Test Purposes 10
6.2.1 Test Purposes in the non-roaming scenario 10
6.2.2 Test Purposes in the roaming with local breakout scenario 12
6.2.3 Test Purposes in the roaming with home routed scenario 14
History 17

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI IPR online database.

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™**, **LTE™** and **5G™** logo are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM**® and the GSM logo are trademarks registered and owned by the GSM Association.

Foreword

This Technical Specification (TS) has been produced by ETSI Technical Committee Core Network and Interoperability Testing (INT).

The present document is part 1 of a multi-part deliverable covering Network Interoperability Test Description for IPv6 only services over 5G, as defined below:

Part 1: "Test purposes";

Part 2: "Test Description";

Part 3: "Abstract Test Suite".

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the ETSI Drafting Rules (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

1 Scope

The present document defines the Test Purpose for IPv6-only services over 5G, covers roaming and non-roaming test scenarios.

2 References

2.1 Normative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

Referenced documents which are not found to be publicly available in the expected location might be found in the ETSI docbox.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are necessary for the application of the present document.

[1] ETSI TS 123 501: "5G; System architecture for the 5G System (5GS); (3GPP TS 23.501)".

[2] ETSI TS 123 502: "5G; Procedures for the 5G System (5GS); (3GPP TS 23.502)".

[3] IETF RFC 6877: "464XLAT: Combination of Stateful and Stateless Translation".

[4] ETSI ES 203 119-4: "Methods for Testing and Specification (MTS); The Test Description Language (TDL); Part 4: Structured Test Objective Specification (Extension)".

2.2 Informative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long term validity.

The following referenced documents are not necessary for the application of the present document but they assist the user with regard to a particular subject area.

[i.1] ISO/IEC 9646-1: "Information technology -- Open Systems Interconnection -- Conformance testing methodology and framework -- Part 1: General concepts".

[i.2] IETF RFC 6146: "Stateful NAT64: Network Address and Protocol Translation from IPv6 Clients to IPv4 Servers".

[i.3] IETF RFC 6147: "DNS64: DNS Extensions for Network Address Translation from IPv6 Clients to IPv4 Servers".

[i.4] IETF RFC 7050: "Discovery of the IPv6 Prefix Used for IPv6 Address Synthesis".

[i.5] IETF RFC 7915: "IP/ICMP Translation Algorithm".

3 Definition of terms, symbols and abbreviations

3.1 Terms

For the purposes of the present document, the terms given in ETSI TS 123 501 [1], IETF RFC 6146 [i.2], IETF RFC 6147 [i.3], IETF RFC 6877 [3], IETF RFC 7050 [i.4], IETF RFC 7915 [i.5] and the following apply:

Abstract Test Method (ATM): Refer to ISO/IEC 9646-1 [i.1].

Abstract Test Suite (ATS): Refer to ISO/IEC 9646-1 [i.1].

Implementation Under Test (IUT): Refer to ISO/IEC 9646-1 [i.1].

Test Purpose (TP): Refer to ISO/IEC 9646-1 [i.1].

3.2 Symbols

Void.

3.3 Abbreviations

For the purposes of the present document, the following abbreviations apply:

3GPP	3rd Generation Partnership Project
5GC	5G Core
5GC_A	5G Core for A network
5GC_B	5G Core for B network
AC4	ACcess of Internet IPv4 servers
AC6	ACcess of Internet IPv6 servers
AMF	Access and Mobility Function
ATM	Abstract Test Method
ATS	Abstract Test Suite
CLAT	Customer-side transLATor
DN	Data Network
DNN	Data Network Name
DNS	Domain Name Service
DNS64	DNS with translation from IPv4 to IPv6
DNSAA	DNS/DNS64 Address Allocation
E2E	End to End
HPLMN	Home Public Land Mobile Network
HR	Home Routing
IP	Internet Protocol
IPAA	IPv6 Address Allocation
IUT	Implementation Under Test
LBO	Local Break Out
N6	Network reference point 6
NRMI	Non-RoaMIng
PCF	Policy Control Function
PDU	Protocol Data Unit
PICS	Partial Implementation Conformance Statement
PRFD	PReFix Discovery
RMH	RoaMing with Home routed
RMIH	RoaMIng with Home routed
RMIL	RoaMIng with Local break out
SMF	Service Management Function
TDL	Test Description Language
TDL-TO	Test Description Language - Test Objective extension
TP	Test Purposes
TSS	Test Suite Structure

UE	User Equipment
UPF	User Plane Function
VPLMN	Visited Public Land Mobile Network

4 Test Configurations

4.1 General

Test purposes of the present document address the 5GS and IPv6-only functional entities. CLAT is at the UE, sharing an interface with UE. DNS64 and NAT64 are accessible via N6. N6a represents the interface between NAT64 and DN to observe translation behaviours.

4.2 Test configuration

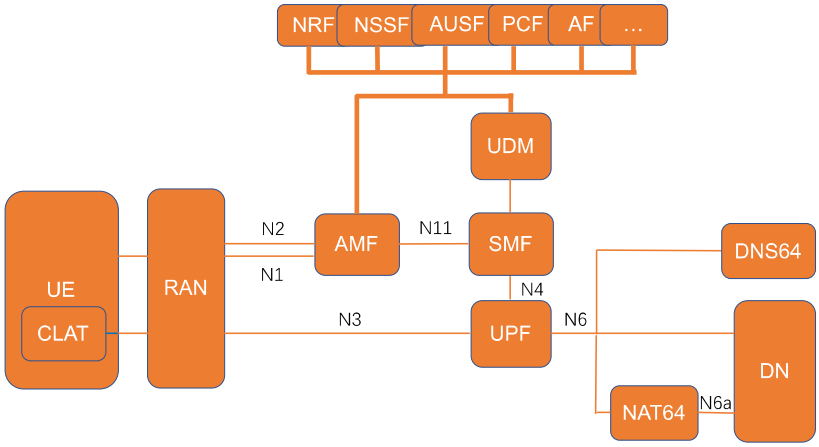


Figure 1: Test configuration CF_5G_IPv6only_NRMI

Configuration CF_5G_IPv6only_NRMI is used for a network where users are registered to their home network. The suffix NRMI stands for non-roaming scenario. PDU session establishment procedures of UEs are performed locally in their own home network.

Configuration CF_5G_IPv6only_NRMI shall have CLAT, NAT64 and DNS64 function in the home network. UE shall have CLAT function.

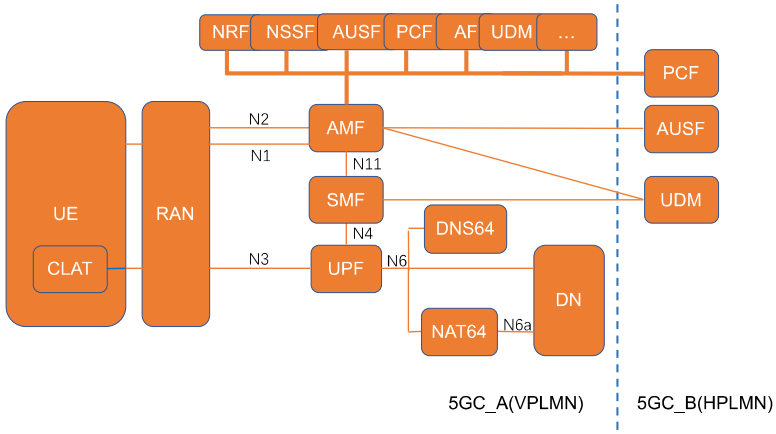


Figure 2: Test configuration CF_5G_IPv6only_RMIL

Configuration CF_5G_IPv6only_RMIL describes the roaming scenario with Local Breakout (LBO). UE connects to the visited network 5GC_A. In the case of LBO, the PDU session establishment procedure is as in the case of non-roaming with the difference that the AMF, the SMF, the UPF and the PCF are located in the visited network.

Configuration CF_5G_IPv6only_ RMIL shall have CLAT, NAT64 and DNS64 function in the visited network. UE shall have CLAT function.

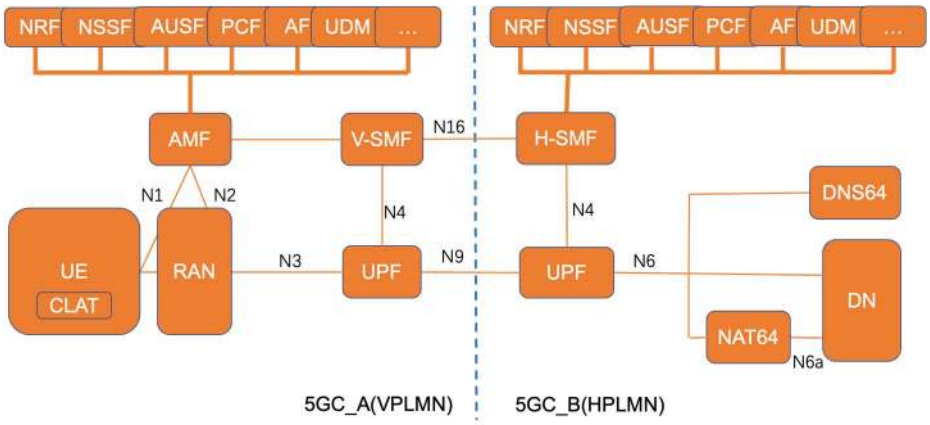


Figure 3: Test configuration CF_5G_IPv6only_RMIH

Configuration CF_5G_IPv6only_RMIH describes the Home-Routed (HR) roaming scenario. UE connects to the visited network 5GC_A. The PDU session is supported by a SMF function under control of the HPLMN, by a SMF function under control of the VPLMN, by at least one UPF under control of the HPLMN and by at least one UPF under control of the VPLMN.

Configuration CF_5G_IPv6only_ RMIH shall have NAT64 and DNS64 function in the home network. UE shall have CLAT function.

NOTE: PDU Sessions for Emergency services are never established in Home Routed mode. The local network which UE connects shall have NAT64 and DNS64 function.

Table 1 depicts network capabilities where the network shall have to provide IPv6-only connectivity service.

Table 1: Network capabilities for IPv6-only E2E scenarios

E2E scenarios	UE	Home network	Visited network
Non-roaming	CLAT	NAT64 DNS64	
Roaming with Local Breakout	CLAT		NAT64 DNS64
Roaming with Home Routing	CLAT	NAT64 DNS64	

5 Test Suite Structure (TSS)

5.1 Structure for IPv6 only services over 5G test purposes

Table 2 shows the Test Suite Structure (TSS) including its subgroups defined for interoperability testing of test purposes of IPv6 only services over 5G.

- UE IPv6 address allocation in 5G core network
- DNS64 address allocation
- NAT64 prefix discovery
- Access of Internet IPv4 servers
- Access of Internet IPv6 servers

Table 2: TSS for IPv6 only services over 5G TPs

Test group	Scope
Non-roaming	UE IPv6 address allocation
	DNS64 address allocation
	NAT64 prefix discovery
	Access of Internet IPv4 servers
	Access of Internet IPv6 servers
Roaming with local breakout	UE IPv6 address allocation
	DNS64 address allocation
	NAT64 prefix discovery
	Access of Internet IPv4 servers
	Access of Internet IPv6 servers
Roaming with home routed	UE IPv6 address allocation
	DNS64 address allocation
	NAT64 prefix discovery
	Access of Internet IPv4 servers
	Access of Internet IPv6 servers

6 Test Purposes (TP)

6.1 General

6.1.1 Test strategy

The test purposes were generated as a result of analysis of the base documents [1], [2], [3].

6.1.2 TP naming convention

TPs are numbered, starting at 01, within each group. Groups are organized according to the TSS.

Table 3: TP identifier naming convention scheme

Identifier: **<TP>_<group>_<scope>_<nn>**				
<TP>	=	Test Purpose:	fixed to "TP"	
<group>	=	test group:	RMIL	Roaming with local breakout
			RMH	Roaming with home routed
			NRMI	Non-roaming
<scope>	=	subgroup:	IPAA	UE IPv6 address allocation
			DNSAA	DNS/DNS64 address allocation
			PRFD	NAT64 prefix discovery
			AC4	Access of Internet IPv4 servers
			AC6	Access of Internet IPv6 servers
<nn>	=	sequential number:	(01 to 99)	

6.1.3 TP structure

Each TP has been written in TDL-TO and thus in a structured manner which is consistent with all other TPs. The intention of this is to make the TPs more formal. In addition, a more readable format is provided by generating tables out of the TDL-TO format. The defined structure, that has been used, is illustrated in table 4. This table should be read in conjunction with any TP. All structures are defined formally in the TDL Specification ETSI ES 203 119-4 [4].

Table 4: Structure of a single TP

TP part	Text	Example
Header	<Identifier> <Test objective> <Reference> <PICS reference>	*"The IUT is responding on a correctly set …"*
Initial condition (optional)	Free text description of the condition that the IUT has reached before the test purpose applies.	*… the IUT is in the initial state …*
Start point	Describes the full logic of the test purpose. Includes trigger and expected behaviour of the IUT.	*Expected behaviour* *ensure that { … }*
Trigger	One or more actions that trigger an expected response of the IUT. Mostly a set of different messages the IUT receives.	*when {* *the IUT entity receives an INVITE request message* *containing CSeq indicating value 1 …* *}*
Expected behaviour	Describes the response that the IUT sends after receiving a certain (set of) messages. This response describes the pass criteria	*then {* *the IUT entity sends a 100 Trying response message* *containing CSeq indicating value 1 …* *}*

6.2 Test Purposes

6.2.1 Test Purposes in the non-roaming scenario

TP Id	TP_NMRI_IPAA_01
Test Objective	Verify that the 5GC provides the IPv6 prefixes to the UE
Reference	NONE
Configuration	CF_5G_IPv6only_NMRI
PICS Selection	NONE
Initial Conditions	

with {
the 5GC has a UE registered to it which is provisioned with the IPv6 only DNN
and
the 5GC is provisioned with selectable DNN configurations for IPv6 PDU session type
}	

Expected Behaviour	

ensure that {
when {
the 5GC receives a PDU session request from the UE
}
then {
the 5GC only sends the IPv6 prefixes to the UE
}
}	

TP Id	TP_NMRI_DNSAA_01
Test Objective	Verify that the 5GC provides the DNS64 server address to the UE
Reference	NONE
Configuration	CF_5G_IPv6only_NMRI
PICS Selection	NONE
Initial Conditions	
with { the 5GC has a UE registered to it which is provisioned with the IPv6 only DNN	

```
     and
     the 5GC is provisioned with selectable DNN configurations for IPv6 PDU session type
     }
```

Expected Behaviour

```
ensure that {
     when {
          the 5GC receives a PDU session request from the UE
          }
     then {
          the 5GC only sends the DNS64 server address to the UE
          }
     }
```

TP Id	TP_NMRI_PRFD_01
Test Objective	Verify that the UE discovers NAT64 prefixes
Reference	NONE
Configuration	CF_5G_IPv6only_NMRI
PICS Selection	NONE

Initial Conditions

```
with {
     the UE is provisioned with the IPv6 only DNN
     and
     the UE is registered to the 5GC which is provisioned with selectable DNN configurations for
     IPv6 PDU session type
     and
     the UE has received the DNS64 server address from the 5GC
     and
     the UE generates IPv6 addresses
     }
```

Expected Behaviour

```
ensure that {
     when {
          the UE sends a DNS query for AAAA resource records of well-known IPv4-only domain name
     "ipv4only.arpa."
          }
     then {
          the UE receives NAT64 prefixes which can be extracted from the DNS64 response
          }
     }
```

TP Id	TP_NMRI_AC4_01
Test Objective	Verify the UE accesses IPv4 servers successfully through 5GC
Reference	NONE
Configuration	CF_5G_IPv6only_NMRI
PICS Selection	NONE

Initial Conditions

```
with {
     the UE is provisioned with the IPv6 only DNN
     and
     the UE is registered to the 5GC which is provisioned with selectable DNN configurations for
     IPv6 PDU session type
     and
     the UE has received the DNS64 server address from the 5GC
     and
     the UE generates IPv6 addresses
     }
```

Expected Behaviour

```
ensure that {
     when {
          the UE accesses IPv4 servers
          }
     then {
          the UE gets contents from IPv4 servers
          }
     }
```

TP Id	TP_NMRI_AC6_01
Test Objective	Verify that the UE accesses IPv6 servers successfully through 5GC
Reference	NONE
Configuration	CF_5G_IPv6only_NMRI
PICS Selection	NONE
Initial Conditions	

with {
the UE is provisioned with the IPv6 only DNN
and
the UE is registered to the 5GC which is provisioned with selectable DNN configurations for IPv6 PDU session type
and
the UE has received the DNS64 server address from the 5GC
and
the UE generates IPv6 addresses
}	

Expected Behaviour	

ensure that {
when {
the UE accesses IPv6 servers
}
then {
the UE gets contents from IPv6 servers
}
}	

6.2.2 Test Purposes in the roaming with local breakout scenario

TP Id	TP_RMIL_IPAA_01
Test Objective	Verify that the 5GC_A provides the IPv6 prefixes to the UE
Reference	NONE
Configuration	CF_5G_IPv6only_RMIL
PICS Selection	NONE
Initial Conditions	

with {
the 5GC_A has a UE registered to it which is provisioned with the IPv6 only DNN
and
the 5GC_A is provisioned with selectable DNN configurations for IPv6 PDU session type
}	

Expected Behaviour	

ensure that {
when {
the 5GC_A receives a PDU session request from the UE
}
then {
the 5GC_A only sends the IPv6 prefixes to the UE
}
}	

TP Id	TP_RMIL_DNSAA_01
Test Objective	Verify that the 5GC_A provides the DNS64 server address to the UE
Reference	NONE
Configuration	CF_5G_IPv6only_RMIL
PICS Selection	NONE
Initial Conditions	

with {
the 5GC_A has a UE registered to it which is provisioned with the IPv6 only DNN
and
the 5GC_A is provisioned with selectable DNN configurations for IPv6 PDU session type
}	

Expected Behaviour	

ensure that {
when {
the 5GC_A receives a PDU session request from the UE
}
then {	

```
          the 5GC_A only sends the DNS64 server address to the UE
          }
     }
```

TP Id	TP_RMIL_PRFD_01
Test Objective	Verify that the UE discovers NAT64 prefixes
Reference	NONE
Configuration	CF_5G_IPv6only_RMIL
PICS Selection	NONE
Initial Conditions	

with {
the UE is provisioned with the IPv6 only DNN
and
the UE is registered to the 5GC_A which is provisioned with selectable DNN configurations for IPv6 PDU session type
and
the UE has received the DNS64 server address from the 5GC_A
and
the UE generates IPv6 addresses
}	

Expected Behaviour	

ensure that {
when {
the UE sends a DNS query for AAAA resource records of well-known IPv4-only domain name "ipv4only.arpa."
}
then {
the UE receives NAT64 prefixes which can be extracted from the DNS64 response
}
}	

TP Id	TP_RMIL_AC4_01
Test Objective	Verify the UE accesses IPv4 servers successfully through 5GC_A
Reference	NONE
Configuration	CF_5G_IPv6only_RMIL
PICS Selection	NONE
Initial Conditions	

with {
the UE is provisioned with the IPv6 only DNN
and
the UE is registered to the 5GC_A which is provisioned with selectable DNN configurations for IPv6 PDU session type
and
the UE has received the DNS64 server address from the 5GC_A
and
the UE generates IPv6 addresses
}	

Expected Behaviour	

ensure that {
when {
the UE accesses IPv4 servers
}
then {
the UE gets contents from IPv4 servers
}
}	

TP Id	TP_RMIL_AC6_01
Test Objective	Verify that the UE accesses IPv6 servers successfully through 5GC_A
Reference	NONE
Configuration	CF_5G_IPv6only_RMIL
PICS Selection	NONE
Initial Conditions	
with { the UE is provisioned with the IPv6 only DNN and the UE is registered to the 5GC_A which is provisioned with selectable DNN configurations for	

```
     IPv6 PDU session type
     and
     the UE has received the DNS64 server address from the 5GC_A
     and
     the UE generates IPv6 addresses
     }
```

Expected Behaviour

```
ensure that {
     when {
          the UE accesses IPv6 servers
          }
     then {
          the UE gets contents from IPv6 servers
          }
     }
```

6.2.3 Test Purposes in the roaming with home routed scenario

TP Id	TP_RMIH_IPAA_01
Test Objective	Verify that the 5GC_B provides the IPv6 prefixes to the UE
Reference	NONE
Configuration	CF_5G_IPv6only_RMIH
PICS Selection	NONE

Initial Conditions

```
with {
     the 5GC_A has a UE registered to it which is provisioned with the IPv6 only DNN
     and
     the 5GC_B is provisioned with selectable DNN configurations for IPv6 PDU session type
     }
```

Expected Behaviour

```
ensure that {
     when {
          the 5GC_B receives a PDU session request from the UE
          }
     then {
          the 5GC_B only sends the IPv6 prefixes to the UE
          }
     }
```

TP Id	TP_RMIH_DNSAA_01
Test Objective	Verify that the 5GC_B provides the DNS64 server address to the UE
Reference	NONE
Configuration	CF_5G_IPv6only_RMIH
PICS Selection	NONE

Initial Conditions

```
with {
     the 5GC_A has a UE registered to it which is provisioned with the IPv6 only DNN
     and
     the 5GC_B is provisioned with selectable DNN configurations for IPv6 PDU session type
     }
```

Expected Behaviour

```
ensure that {
     when {
          the 5GC_B receives a PDU session request from the UE
          }
     then {
          the 5GC_B only sends the DNS64 server address to the UE
          }
     }
```

TP Id	TP_RMIH_PRFD_01
Test Objective	Verify that the UE discovers NAT64 prefixes
Reference	NONE
Configuration	CF_5G_IPv6only_RMIH
PICS Selection	NONE
Initial Conditions	

with {
the UE is provisioned with the IPv6 only DNN
and
the UE is registered to the 5GC_B which is provisioned with selectable DNN configurations for IPv6 PDU session type
and
the UE has received the DNS64 server address from the 5GC_A
and
the UE generates IPv6 addresses
}	

Expected Behaviour	

ensure that {
when {
the UE sends a DNS query for AAAA resource records of well-known IPv4-only domain name "ipv4only.arpa."
}
then {
the UE receives NAT64 prefixes which can be extracted from the DNS64 response
}
}	

TP Id	TP_RMIH_AC4_01
Test Objective	Verify the UE accesses IPv4 servers successfully
Reference	NONE
Configuration	CF_5G_IPv6only_RMIH
PICS Selection	NONE
Initial Conditions	

with {
the UE is provisioned with the IPv6 only DNN
and
the UE is registered to the 5GC_A which is provisioned with selectable DNN configurations for IPv6 PDU session type
and
the UE has received the DNS64 server address from the 5GC_B
and
the UE generates IPv6 addresses
}	

Expected Behaviour	

ensure that {
when {
the UE accesses IPv4 servers
}
then {
the UE gets contents from IPv4 servers
}
}	

TP Id	TP_RMIH_AC6_01
Test Objective	Verify that the UE accesses IPv6 servers successfully
Reference	NONE
Configuration	CF_5G_IPv6only_RMIH
PICS Selection	NONE
Initial Conditions	
with { the UE is provisioned with the IPv6 only DNN and the UE is registered to the 5GC_A which is provisioned with selectable DNN configurations for IPv6 PDU session type and the UE has received the DNS64 server address from the 5GC_B and	

```
     the UE generates IPv6 addresses
     }
```

Expected Behaviour

```
ensure that {
     when {
          the UE accesses IPv6 servers
          }
     then {
          the UE gets contents from IPv6 servers
          }
     }
```

History

Document history		
V1.1.1	May 2025	Publication