ETSI TS 124 417 V18.0.0 (2024-05)

LTE;
5G;
Management Object (MO)
for Originating Identification Presentation (OIP)
and Originating Identification Restriction (OIR)
using IP Multimedia (IM) Core Network (CN) subsystem
(3GPP TS 24.417 version 18.0.0 Release 18)

Reference
RTS/TSGC-0124417vi00

Keywords
5G,LTE

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° w061004871

Important notice

The present document can be downloaded from:
https://www.etsi.org/standards-search

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format at www.etsi.org/deliver.

Users of the present document should be aware that the document may be subject to revision or change of status.
Information on the current status of this and other ETSI documents is available at
https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx

If you find errors in the present document, please send your comment to one of the following services:
https://portal.etsi.org/People/CommiteeSupportStaff.aspx

If you find a security vulnerability in the present document, please report it through our
Coordinated Vulnerability Disclosure Program:
https://www.etsi.org/standards/coordinated-vulnerability-disclosure

Notice of disclaimer & limitation of liability

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.
No recommendation as to products and services or vendors is made or should be implied.
No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.
In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.
The content of the PDF version shall not be modified without the written authorization of ETSI.
The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2024.
All rights reserved.

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (https://ipr.etsi.org/).

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™** and **LTE™** are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM**® and the GSM logo are trademarks registered and owned by the GSM Association.

Legal Notice

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities. These shall be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between 3GPP and ETSI identities can be found under https://webapp.etsi.org/key/queryform.asp.

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the ETSI Drafting Rules (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

Contents

Intellectual Property Rights 2
Legal Notice 2
Modal verbs terminology 2
Foreword 4
1 Scope 5
2 References 5
3 Definitions, symbols and abbreviations 5
3.1 Definitions 5
3.2 Abbreviations 5
4 OIP and OIR management object 6
4.1 General 6
5 Management object parameters 6
5.1 General 6
5.2 Node: /<X> 6
5.3 /<*X*>/Name 7
5.4 /<*X*>/FromPreferred 7
5.5 /<x>/Ext/ 7
5.6 /<*X*>/SNPN_Configuration 7
5.7 /<*X*>/SNPN_Configuration/<X> 8
5.8 /<*X*>/SNPN_Configuration/<X>/SNPN_identifier 8
5.9 /<*X*>/SNPN_Configuration/<*X*>/FromPreferred 8
Annex A (informative): Management object DDF 9
Annex B (informative): Change history 12
History 13

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

x the first digit:

1 presented to TSG for information;

2 presented to TSG for approval;

3 or greater indicates TSG approved document under change control.

y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.

z the third digit is incremented when editorial only changes have been incorporated in the document.

1 Scope

The present document defines a Management Object (MO) for Originating Identification Presentation (OIP) and Originating Identification Restriction (OIR). The management object is compatible with OMA Device Management protocol specifications, version 1.2 and upwards, and is defined using the OMA DM Device Description Framework as described in the Enabler Release Definition OMA-ERELD _DM-V1_2 [2].

The OIP/OIR MO consists of relevant parameters that can be managed for the UE configuration related to the Originating Identification Presentation (OIP) and Originating Identification Restriction (OIR) service defined in 3GPP TS 24.607 [3].

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document*.

[1] 3GPP TR 21.905: "Vocabulary for 3GPP Specifications".

[2] OMA-ERELD-DM-V1_2-20070209-A: "Enabler Release Definition for OMA Device Management, Version 1.2".

[3] 3GPP TS 24.607: "Originating Identification Presentation (OIP) and Originating Identification Restriction (OIR) using IP Multimedia (IM) Core Network (CN) subsystem; Protocol specification"

[4] 3GPP TS 23.003: "Numbering, addressing and identification".

3 Definitions, symbols and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in 3GPP TR 21.905 [1] and the following apply. A term defined in the present document takes precedence over the definition of the same term, if any, in 3GPP TR 21.905 [1].

3.2 Abbreviations

For the purposes of the present document, the abbreviations given in 3GPP TR 21.905 [1] and the following apply. An abbreviation defined in the present document takes precedence over the definition of the same abbreviation, if any, in 3GPP TR 21.905 [1].

CN	Core Network
DDF	Device Description Framework
DM	Device Management
IM	IP Multimedia
ME	Mobile Equipment
MO	Management Object
OMA	Open Mobile Alliance

OIP	Originating Identification Presentation
OIR	Originating Identification Restriction
SNPN	Stand-alone Non-Public Network

4 OIP and OIR management object

4.1 General

The OIP-OIR Management Object (MO) is used to configure the UE behaviour for the settings related to Originating Identification Presentation (OIP) and Originating Identification Restriction (OIR) supplementary services.

The MO Identifier (MOID) is: urn:oma:mo:ext-3gpp-oipoir:1.0.

Protocol compatibility: This MO is compatible with OMA DM 1.2.The following nodes and leaf objects are possible under the Name node as described in figure 4-1:

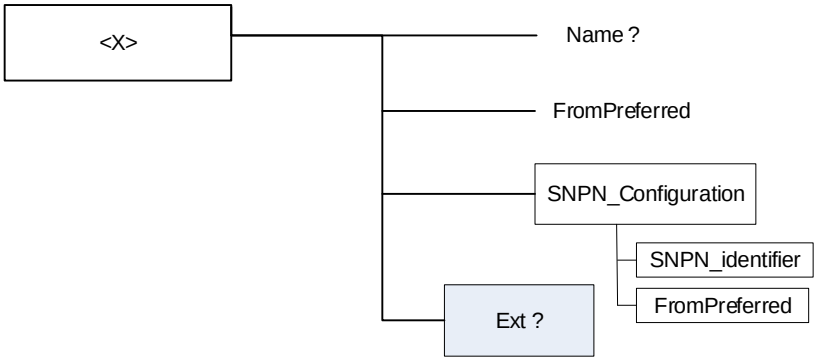

Figure 4-1: The OIP-OIR Services MO

5 Management object parameters

5.1 General

This clause describes the parameters for the Originating Identification Presentation (OIP) and Originating Identification Restriction (OIR) MO.

5.2 Node: /<X>

This interior node acts as a placeholder for the OIP and OIR services MO.

For the OIP-OIR services configuration MO, the namespace specific string is: "urn:oma:mo:ext-3gpp-oipoir:1.0"

- Occurrence: OneOrMore
- Format: node
- Access Types: Get, Replace
- Values: N/A

Support for a UE is defined by the UE role as specified in 3GPP TS 24.607 [3].

NOTE: One node is normally used.

5.3 /<*X*>/Name

The Name leaf is a name for the OIP and OIR services settings.

- Occurrence: ZeroOrOne
- Format: chr
- Access Types: Get, Replace
- Values: <User displayable name>

5.4 /<*X*>/FromPreferred

The FromPreferred leaf indicates operator's originating party identity determination policy.

- Occurrence: One
- Format: bool
- Access Types: Get, Replace
- Values: 0, 1

  0 – Indicates that the From header field is not used for determination of the originating party identity in OIP service.

  1 – Indicates that the identity provided within the From header field is used for determination of the originating party identity in OIP service, regardless the presence or absence of the P-Asserted-Identity header field.

The default value is '0'.

Use of the FromPreferred leaf is specified in 3GPP TS 24.607 [3].

5.5 /<x>/Ext/

The Ext is an interior node for where the vendor specific information about the OIP and OIR services UE configuration MO is being placed. Usually the vendor extension is identified by vendor specific name under the ext node and contains the vendor meaning application vendor, device vendor etc. The tree structure under the vendor identified is not defined and can therefore include one or more un-standardized sub-trees.

- Occurrence: ZeroOrOne
- Format: node
- Access Types: Get
- Values: N/A

5.6 /<*X*>/SNPN_Configuration

This interior node contains configuration parameters regarding a UE operating in SNPN access operation mode.

- Occurrence: ZeroOrOne
- Format: node
- Access Types: Get, Replace
- Values: N/A

5.7 /<*X*>/SNPN_Configuration/<X>

This interior node acts as a placeholder for a list of:

a) SNPN identity; and

b) configuration parameters.

NOTE: For each of the elements in the list, a) must be present and at least one parameter of b) needs to appear.

A configuration parameter in an /<X>/SNPN_Configuration/<X> node other than the SNPN_identifier, is applicable when the UE selects an entry of "list of subscriber data" with the SNPN identity of the subscribed SNPN which is the same as the SNPN identity in the SNPN_identifier leaf.

- Occurrence: OneOrMore
- Format: node
- Access Types: Get, Replace
- Values: N/A

5.8 /<*X*>/SNPN_Configuration/<X>/SNPN_identifier

This leaf indicates the SNPN identity of the subscribed SNPN for which the list of configuration parameters are applicable.

- Occurrence: One
- Format: chr
- Access Types: Get, Replace
- Values: <PLMN><NID>

The PLMN and NID are in the format defined by 3GPP TS 23.003 [4], with each digit of the MCC and MNC of the PLMN and each digit of the assignment mode and NID value of the NID encoded as an ASCII character.

5.9 /<*X*>/SNPN_Configuration/<*X*>/FromPreferred

The FromPreferred leaf indicates operator's originating party identity determination policy.

- Occurrence: One
- Format: bool
- Access Types: Get, Replace
- Values: 0, 1

  0 – Indicates that the From header field is not used for determination of the originating party identity in OIP service.

  1 – Indicates that the identity provided within the From header field is used for determination of the originating party identity in OIP service, regardless the presence or absence of the P-Asserted-Identity header field.

The default value is '0'.

Use of the FromPreferred leaf is specified in 3GPP TS 24.607 [3].

Annex A (informative): Management object DDF

This DDF is the standardized minimal set. A vendor can define its own DDF for the complete device. This DDF can include more features than this minimal standardized version.

```
<?xml version="1.0" encoding="UTF-8"?>
<!DOCTYPE MgmtTree PUBLIC "-//OMA//DTD-DM-DDF 1.2//EN"
    "http://www.openmobilealliance.org/tech/DTD/dm_ddf-v1_2.dtd">
<MgmtTree>
    <VerDTD>1.2</VerDTD>
    <Node>
        <NodeName>OIP-OIR</NodeName>
        <DFProperties>
            <AccessType>
                <Get/>
                <Replace/>
            </AccessType>
            <Description>OIP-OIR Services settings</Description>
            <DFFormat>
                <node/>
            </DFFormat>
            <Occurrence>
                <OneOrMore/>
            </Occurrence>
            <DFTitle>The OIP-OIR Services Management Object.</DFTitle>
            <DFType>
                <DDFName>urn:oma:mo:ext-3gpp-oipoir:1.0</DDFName>
            </DFType>
        </DFProperties>

        <Node>
            <NodeName>Name</NodeName>
            <DFProperties>
                <AccessType>
                    <Get/>
                    <Replace/>
                </AccessType>
                <DFFormat>
                    <chr/>
                </DFFormat>
                <Occurrence>
                    <ZeroOrOne/>
                </Occurrence>
                <DFTitle>User displayable name for the node.</DFTitle>
                <DFType>
                    <MIME>text/plain</MIME>
                </DFType>
            </DFProperties>
        </Node>

        <Node>
            <NodeName>FromPreferred</NodeName>
            <DFProperties>
                <AccessType>
                    <Get/>
                    <Replace/>
                </AccessType>
                <DFFormat>
                    <bool/>
                </DFFormat>
                <Occurrence>
                    <One/>
                </Occurrence>
                <DFTitle>This leaf specifies a preference of the operator to enable the presentation
of the identity in the From header.</DFTitle>
                <DFType>
                    <MIME>text/plain</MIME>
                </DFType>
            </DFProperties>
        </Node>
        <Node>
            <NodeName>SNPN_Configuration</NodeName>
            <DFProperties>
                <AccessType>
```

```
                    <Get/>
                    <Replace/>
                </AccessType>
                <DFFormat>
                    <node/>
                </DFFormat>
                <Occurrence>
                    <ZeroOrOne/>
                </Occurrence>
                <Scope>
                    <Permanent/>
                </Scope>
                <DFTitle>SNPN Configuration.</DFTitle>
                <DFType>
                    <MIME>text/plain</MIME>
                </DFType>
            </DFProperties>
            <Node>
                <NodeName/>
                <DFProperties>
                    <AccessType>
                        <Get/>
                    </AccessType>
                    <DFFormat>
                        <node/>
                    </DFFormat>
                    <Occurrence>
                        <OneOrMore/>
                    </Occurrence>
                    <Scope>
                        <Dynamic/>
                    </Scope>
                    <DFTitle>SNPN configuration parameters.</DFTitle>
                    <DFType>
                        <MIME>text/plain</MIME>
                    </DFType>
                </DFProperties>
                <Node>
                    <NodeName>SNPN_identifier</NodeName>
                    <DFProperties>
                        <AccessType>
                            <Get/>
                            <Replace/>
                        </AccessType>
                        <DFFormat>
                            <chr/>
                        </DFFormat>
                        <Occurrence>
                            <One/>
                        </Occurrence>
                        <Scope>
                            <Permanent/>
                        </Scope>
                        <DFTitle>Identifier of the SNPN.</DFTitle>
                        <DFType>
                            <MIME>text/plain</MIME>
                        </DFType>
                    </DFProperties>
                </Node>
                <Node>
                    <NodeName>FromPreferred</NodeName>
                    <DFProperties>
                        <AccessType>
                            <Get/>
                            <Replace/>
                        </AccessType>
                        <DFFormat>
                            <bool/>
                        </DFFormat>
                        <Occurrence>
                            <One/>
                        </Occurrence>
                        <DFTitle>This leaf specifies a preference of the operator to enable the
presentation of the identity in the From header.</DFTitle>
                        <DFType>
                            <MIME>text/plain</MIME>
                        </DFType>
                    </DFProperties>
```

```
                </Node>
            </Node>
        <Node>
            <NodeName>Ext</NodeName>
            <!-- The Extension node starts here. -->
            <DFProperties>
                <AccessType>
                    <Get/>
                </AccessType>
                <DFFormat>
                    <node/>
                </DFFormat>
                <Occurrence>
                    <ZeroOrOne/>
                </Occurrence>
                <DFTitle>A collection of all Extension objects.</DFTitle>
                <DFType>
                    <DDFName/>
                </DFType>
            </DFProperties>
        </Node>

    </Node>
</MgmtTree>
```

Annex B (informative): Change history

Change history							
Date	**Meeting**	**TDoc**	**CR**	**Rev**	**Cat**	**Subject/Comment**	**New version**
2016-05	CT1#98	C1-162939				Initial proposal	0.0.0
2016-06	CT1#98	C1-162939 C1-162511				Included skeleton from C1-162939 and scope from C1-162511	0.1.0
2016-07	CT1#99	C1-163947				description of the MO parameters and the DDF schema	0.2.0
2016-11						Editorial changes	0.2.1
2016-11	CT-74	CP-160706				Version 1.0.0 created for presentation for information to CT plenary	1.0.0
2017-02	CT1#102	C1-170616 C1-171066				Incorporating correction to DDF and Access type Removal of Editor's Note for MOID registration to OMNA.	1.1.0
2017-02	CT-75	CP-170160				Version 2.0.0 created for presentation for approval to CT plenary	2.0.0
2017-03	CT-75					Version 14.0.0 created after approval at CT plenary	14.0.0
2018-06	SA-80	-	-	-	-	Update to Rel-15 version (MCC)	15.0.0
2018-12	CT-82	CP-183077	0001		F	Addition of the object identifier in the DDF of the 3GPP Management Object	16.0.0
2022-04	-	-	-	-	-	Update to Rel-17 version (MCC)	17.0.0
2022-06	CT#96	CP-221249	0002	1	B	SNPN configuration for OIP/OIR	17.1.0
2024-04	-	-	-	-	-	Update to Rel-18 version (MCC)	**18.0.0**

History

Document history		
V18.0.0	May 2024	Publication