ETSI TR 102 638 V2.2.1 (2026-09)



TECHNICAL REPORT

Intelligent Transport Systems (ITS);
Framework;
Basic Set of Applications;
Release 2

Reference
RTR/ITS-1001

Keywords
application, ITS

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - APE 7112B
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° w061004871

Important notice

The present document can be downloaded from the
ETSI Search & Browse Standards application.

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the prevailing version of an ETSI deliverable is the one made publicly available in PDF format on ETSI deliver repository.

Users should be aware that the present document may be revised or have its status changed, this information is available in the Milestones listing.

If you find errors in the present document, please send your comments to the relevant service listed under Committee Support Staff.

If you find a security vulnerability in the present document, please report it through our Coordinated Vulnerability Disclosure (CVD) program.

Notice of disclaimer & limitation of liability

The information provided in the present deliverable is directed solely to professionals who have the appropriate degree of experience to understand and interpret its content in accordance with generally accepted engineering or other professional standard and applicable regulations.
No recommendation as to products and services or vendors is made or should be implied.
No representation or warranty is made that this deliverable is technically accurate or sufficient or conforms to any law and/or governmental rule and/or regulation and further, no representation or warranty is made of merchantability or fitness for any particular purpose or against infringement of intellectual property rights.
In no event shall ETSI be held liable for loss of profits or any other incidental or consequential damages.

Any software contained in this deliverable is provided "AS IS" with no warranties, express or implied, including but not limited to, the warranties of merchantability, fitness for a particular purpose and non-infringement of intellectual property rights and ETSI shall not be held liable in any event for any damages whatsoever (including, without limitation, damages for loss of profits, business interruption, loss of information, or any other pecuniary loss) arising out of or related to the use of or inability to use the software.

Copyright Notification

No part of this document may be reproduced in any form, by any means and in any media, without the prior written authorization of ETSI and except as expressly permitted below.
By way of exception and when the document is a normative deliverable (European Standard (EN), Technical Specification (TS), Group Specification (GS) or ETSI Standard (ES)), ETSI authorizes to reproduce and incorporate into products, services and technical documentation only those extracts (e.g. templates) that are strictly necessary for the technical implementation of the normative deliverable, to ensure compliance with the latter.
Nothing in this notice shall be construed as limiting any mandatory exceptions to copyright provided by applicable law.

© ETSI 2026.
All rights reserved.

Contents

Intellectual Property Rights 9
Foreword 9
Modal verbs terminology 9
Introduction 9
1 Scope 10
2 References 10
2.1 Normative references 10
2.2 Informative references 10
3 Definition of terms, symbols, and abbreviations 11
3.1 Terms 11
3.2 Symbols 12
3.3 Abbreviations 12
4 Basic principles 12
4.1 Introduction 12
4.2 ITS services, ITS applications, Use Cases, and Implementation Scenarios 12
4.2.1 Introduction 12
4.2.2 ITS Services (ITSs) 13
4.2.3 Cooperative ITS (C-ITS) 13
4.2.4 ITS Applications 14
4.2.5 Use Cases 14
4.2.6 Implementation Scenarios 14
4.3 Safety, Active Safety and Passive-Safety 14
4.3.1 Introduction 14
4.3.2 Active safety - Crash Avoidance 14
4.3.3 Active safety - Pre-crash mitigation 15
4.3.4 Passive Safety 15
4.3.5 Operational Safety Requirements 15
4.4 Automation Levels 16
4.4.1 Introduction 16
4.4.2 Partial Automation 16
4.4.3 Full automation 17
4.4.4 Cooperative Driving 17
4.4.5 Cooperation classes 18
4.4.6 Mixed traffic management 18
5 ITS Services, Applications and use cases 19
5.1 Introduction 19
5.2 Partial and high automation 19
5.2.1 ITS Service introduction 19
5.2.2 Hazardous Location Notification - Vehicle Support Use Case 20
5.2.2.1 High level description 20
5.2.2.2 Possible ITS architecture and ITS-S services 20
5.2.2.3 Possible implementation scenarios 20
5.2.2.4 Implementation scenario flow diagram 21
5.2.2.5 Possible implementation scenarios options 21
5.2.3 Cooperative Adaptive Cruise Control (C-ACC) use case 21
5.2.3.1 High level description 21
5.2.3.2 Possible ITS architecture and ITS-S services 22
5.2.3.3 Possible implementation scenarios 22
5.2.3.4 Implementation scenario flow diagram 22
5.2.3.5 Possible implementation scenarios options 23
5.2.4 C-ACC string use case 23
5.2.4.1 High level description 23
5.2.4.2 Possible ITS architecture and ITS-S services 24

5.2.4.3 Possible implementation scenarios....24
5.2.4.4 Implementation scenario flow diagram....24
5.2.4.5 Possible implementation scenarios options....24
5.2.5 Cooperative Adaptive Emergency Brake System (C-AEBS) use case....24
5.2.5.1 High level description....24
5.2.5.2 Possible ITS architecture and ITS-S services....25
5.2.5.3 Possible implementation scenarios....25
5.2.5.4 Implementation scenario flow diagram....25
5.2.5.5 Possible implementation scenarios options....25
5.2.6 Advanced Pre-Crash sensing use case....26
5.2.6.1 High level description....26
5.2.6.2 Possible ITS architecture and ITS-S services....26
5.2.6.3 Possible implementation scenarios....26
5.2.6.4 Implementation scenario flow diagram....27
5.2.6.5 Possible implementation scenarios options....27
5.2.7 Cooperative Active Lane Keeping (C-ALK) use case....27
5.2.7.1 High level description....27
5.2.7.2 Possible ITS architecture and ITS-S services....28
5.2.7.3 Possible implementation scenarios....28
5.2.7.4 Implementation scenario flow diagram....29
5.2.7.5 Possible implementation scenarios options....29
5.2.8 Cooperative Intelligent Speed Adaptation (C-ISA) use case....29
5.2.8.1 High level description....29
5.2.8.2 Possible ITS architecture and ITS-S services....30
5.2.8.3 Possible implementation scenarios....30
5.2.8.4 Implementation scenario flow diagram....30
5.2.8.5 Possible implementation scenarios options....30
5.2.9 Void....30
5.2.10 Void....30
5.2.11 Infrastructure support for ADS use case....31
5.2.11.1 High level description....31
5.2.11.2 Possible ITS architecture and ITS-S services....31
5.2.11.3 Possible implementation scenarios....31
5.3 CCAM augmented perception....31
5.3.1 ITS service introduction....31
5.3.2 Perception of a non-connected vehicle at an intersection use case....32
5.3.2.1 High level description....32
5.3.2.2 Possible ITS architecture and ITS-S services....32
5.3.2.3 Possible implementation scenarios....32
5.3.2.4 Implementation scenario flow diagram....33
5.3.2.5 Possible implementation scenarios options....33
5.3.3 Perception of a non-connected stationary vehicle at the high of a slop use case....33
5.3.3.1 High level description....33
5.3.3.2 Possible ITS architecture and ITS-S services....33
5.3.3.3 Possible implementation scenarios....34
5.3.3.4 Implementation scenario flow diagram....34
5.3.3.5 Void....34
5.3.4 Advanced non-connected slow vehicle warning use case....34
5.3.4.1 High level description....34
5.3.4.2 Possible ITS architecture and ITS-S services....35
5.3.4.3 Possible implementation scenarios....35
5.3.4.4 Implementation scenario flow diagram....35
5.3.4.5 Void....35
5.3.5 V2V/I2V non-connected VRU perception use case....35
5.3.5.1 High level description....35
5.3.5.2 Possible ITS architecture and ITS-S services....36
5.3.5.3 Possible implementation scenarios....36
5.3.5.4 Implementation scenario flow diagram....36
5.3.5.5 Void....36
5.3.6 Perception into a tunnel use case....36
5.3.6.1 High level description....36
5.3.6.2 Possible ITS architecture and ITS-S services....37

5.3.6.3 Possible implementation scenarios 37
5.3.6.4 Implementation scenario flow diagram 37
5.3.6.5 Possible implementation scenarios options 37
5.3.7 Perception of traffic when merging use case 37
5.3.7.1 High level description 37
5.3.7.2 Possible ITS architecture and ITS-S services 38
5.3.7.3 Possible implementation scenarios 38
5.3.7.4 Implementation scenario flow diagram 38
5.3.7.5 Possible implementation scenarios options 38
5.4 Vehicles' coordination 39
5.4.1 ITS service introduction 39
5.4.2 Void 39
5.4.3 Void 39
5.4.4 Advanced Cooperative ACC (String) (AC-ACC S) use case 39
5.4.4.1 High level description 39
5.4.4.2 Possible ITS architecture and ITS-S services 39
5.4.4.3 Possible implementation scenarios 40
5.4.4.4 Possible implementation scenarios options 40
5.4.5 Truck platooning management use case 40
5.4.5.1 High level description 40
5.4.5.2 Possible ITS architecture and ITS-S services 40
5.4.5.3 Possible implementation scenarios 40
5.4.6 Toll Plaza Guidance use case 41
5.4.6.1 High level description 41
5.4.6.2 Possible ITS architecture and ITS-S services 41
5.4.6.3 Possible implementation scenarios 41
5.4.7 Void 41
5.5 Multi-Car Collision avoidance 41
5.5.1 ITS service introduction 41
5.5.2 Advanced signal violation warning use case 42
5.5.2.1 High level description 42
5.5.2.2 Possible ITS architecture and ITS-S services 43
5.5.2.3 Possible implementation scenarios 43
5.5.2.4 Implementation scenario flow diagram 43
5.5.2.5 Possible implementation scenarios options 44
5.5.3 Advanced wrong way driving warning use case 44
5.5.3.1 High level description 44
5.5.3.2 Possible ITS architecture and ITS-S services 45
5.5.3.3 Possible implementation scenarios 45
5.5.3.4 Implementation scenario flow diagram 45
5.5.3.5 Possible implementation scenarios options 45
5.6 Intersection crossing assist 45
5.6.1 ITS service introduction 45
5.6.2 Advanced Intersection Collision Warning (AICW) use case 45
5.6.2.1 High level description 45
5.6.2.2 Possible ITS architecture and ITS-S services 45
5.6.2.3 Possible implementation scenarios options 45
5.6.3 Void 46
5.6.4 Traffic light-controlled intersection - Priority vehicles management use case 46
5.6.4.1 High level description 46
5.6.4.2 Possible ITS architecture and ITS-S services 46
5.6.4.3 Possible implementation scenarios 47
5.6.4.4 Implementation scenario flow diagram 47
5.6.4.5 Possible implementation scenarios options 47
5.6.5 Optimized traffic light information from V2I use case 47
5.6.5.1 High level description 47
5.6.5.2 Possible ITS architecture and ITS-S services 48
5.6.5.3 Possible implementation scenarios 48
5.6.5.4 Implementation scenario flow diagram 48
5.6.5.5 Possible implementation scenarios options 49
5.6.6 Automated GLOSA (A-GLOSA) use case 49
5.6.6.1 High level description 49

5.6.6.2 Possible ITS architecture and ITS-S services 49
5.6.6.3 Possible implementation scenarios 50
5.6.6.4 Possible implementation scenarios options 50
5.6.7 Automated GLOSA with negotiation use case 50
5.6.7.1 High level description 50
5.6.7.2 Possible ITS architecture and ITS-S services 50
5.6.7.3 Possible implementation scenarios 50
5.6.7.4 Void 50
5.6.8 Railway level crossing use case 50
5.6.8.1 High level description 50
5.6.8.2 Possible ITS architecture and ITS-S services 51
5.6.8.3 Possible implementation scenarios 51
5.6.8.4 Implementation scenario flow diagram 52
5.6.8.5 Possible implementation scenarios options 52
5.6.9 Other intersection/area crossing use case 52
5.6.9.1 High level description 52
5.6.9.2 Possible ITS architecture and ITS-S services 52
5.6.9.3 Possible implementation scenarios 52
5.6.9.4 Implementation scenario flow diagram 52
5.6.9.5 Possible implementation scenarios options 52
5.7 Advanced warning and information, VRU protection 53
5.7.1 ITS service introduction 53
5.7.2 Advanced Slow Vehicle Warning (ASVW) use case 53
5.7.2.1 High level description 53
5.7.2.2 Possible ITS architecture and ITS-S services 53
5.7.2.3 Possible implementation scenarios options 53
5.7.3 Filtering motorcycle use case 53
5.7.3.1 High level description 53
5.7.3.2 Possible ITS architecture and ITS-S services 54
5.7.3.3 Possible implementation scenarios 54
5.7.3.4 Void 54
5.7.4 Overtaking motorcycle use case 54
5.7.4.1 High level description 54
5.7.4.2 Possible ITS architecture and ITS-S services 55
5.7.4.3 Possible implementation scenarios 55
5.7.4.4 Void 55
5.7.5 Overtaking motorcycle and turning vehicle use case 55
5.7.5.1 High level description 55
5.7.5.2 Possible ITS architecture and ITS-S services 56
5.7.5.3 Possible implementation scenarios 56
5.7.5.4 Void 56
5.7.6 Turning vehicle with PTW in the blind spot use case 56
5.7.6.1 High level description 56
5.7.6.2 Possible ITS architecture and ITS-S services 57
5.7.6.3 Possible implementation scenarios 57
5.7.6.4 Possible implementation scenarios options 57
5.7.7 VRU presence awareness use case 57
5.7.7.1 High level description 57
5.7.7.2 Possible ITS architecture and ITS-S services 58
5.7.7.3 Possible implementation scenarios 58
5.7.7.4 Possible implementation scenarios options 58
5.7.8 VRU collision warning use case 59
5.7.8.1 High level description 59
5.7.8.2 Possible ITS architecture and ITS-S services 59
5.7.8.3 Possible implementation scenarios 59
5.7.8.4 Possible implementation scenarios options 59
5.7.9 VRU brake or steering intervention use case 60
5.7.9.1 High level description 60
5.7.9.2 Possible ITS architecture and ITS-S services 60
5.7.9.3 Possible implementation scenarios 60
5.7.9.4 Possible implementation scenarios options 60
5.7.10 VRU safety beacon use case 60

5.7.10.1 High level description 60
5.7.10.2 Possible ITS architecture and ITS-S services 61
5.7.10.3 Possible implementation scenarios 61
5.7.10.4 Implementation scenario flow diagram 61
5.7.10.5 Possible implementation scenarios options 62
5.7.11 VRU complex interaction use case 62
5.7.11.1 High level description 62
5.7.11.2 Possible ITS architecture and ITS-S services 63
5.7.11.3 Possible implementation scenarios 63
5.7.11.4 Possible implementation scenarios options 63
5.7.12 Void 63
5.7.13 Extended cluster management use case 64
5.7.13.1 High level description 64
5.7.13.2 Possible ITS architecture and ITS-S services 64
5.7.13.3 Possible implementation scenarios 64
5.7.13.4 Possible implementation scenarios options 64
5.8 Dynamic navigation 64
5.8.1 ITS service introduction 64
5.8.2 Detour management use case 65
5.8.2.1 High level description 65
5.8.2.2 Possible ITS architecture and ITS-S services 65
5.8.2.3 Possible implementation scenarios 65
5.8.2.4 Possible implementation scenarios options 66
5.9 Contextual dedicated corridor management 66
5.9.1 ITS service introduction 66
5.9.2 Corridor dedicated to an emergency vehicle, rescue/recovery, prioritized/safety vehicle use case 67
5.9.2.1 High level description 67
5.9.2.2 Possible ITS architecture and ITS-S services 67
5.9.2.3 Possible implementation scenarios 67
5.9.2.4 Possible implementation scenarios options 68
5.9.3 Void 68
5.9.4 Corridor dedicated to other priority vehicles use case 68
5.9.4.1 High level description 68
5.9.4.2 Possible ITS architecture and ITS-S services 69
5.9.4.3 Possible implementation scenarios 69
5.9.5 Hard Shoulder Running use case 69
5.9.5.1 High level description 69
5.9.5.2 Possible ITS architecture and ITS-S services 70
5.9.5.3 Possible implementation scenarios 70
5.9.6 Roadwork warning (long-term) use case 70
5.9.6.1 High level description 70
5.9.6.2 Possible ITS architecture and ITS-S services 70
5.9.6.3 Possible implementation scenarios 70
5.9.6.4 Possible implementation scenarios options 71
5.10 POIs management 71
5.10.1 ITS service introduction 71
5.10.2 Parking Availability Service use case 72
5.10.2.1 High level description 72
5.10.2.2 Possible ITS architecture and ITS-S services 72
5.10.2.3 Possible implementation scenarios 72
5.10.2.4 Implementation scenario flow diagram 73
5.10.2.5 Possible implementation scenarios options 73
5.10.3 Void 74
5.10.4 Automated Valet Parking use case 74
5.10.4.1 High level description 74
5.10.4.2 Possible ITS architecture and ITS-S services 75
5.10.4.3 Possible implementation scenarios 76
5.10.4.4 Possible implementation scenarios options 76
5.10.5 Void 76
5.10.6 Other POIs use cases 76
5.10.6.1 High level description 76
5.10.6.2 Possible ITS architecture and ITS-S services 77

5.10.6.3 Possible implementation scenarios....78
5.10.6.4 Implementation scenario flow diagram....78
5.10.6.5 Possible implementation scenarios options....78
5.11 Agricultural specific application....78
5.11.1 ITS service introduction....78
5.11.2 Task data exchange use case....79
5.11.2.1 High level description....79
5.11.2.2 Possible ITS architecture and ITS-S services....79
5.11.2.3 Possible implementation scenarios options....79
5.11.3 Geo referenced data exchange use case....79
5.11.3.1 High level description....79
5.11.3.2 Possible ITS architecture and ITS-S services....79
5.11.3.3 Possible implementation scenarios options....79
5.11.4 Agricultural platooning use case....80
5.11.4.1 High level description....80
5.11.4.2 Possible ITS architecture and ITS-S services....80
5.11.4.3 Possible implementation scenarios options....80
5.11.5 In field safety use case....80
5.11.5.1 High level description....80
5.11.5.2 Possible ITS architecture and ITS-S services....80
5.11.5.3 Possible implementation scenarios options....80
5.11.6 Agricultural work awareness use case....81
5.11.6.1 High level description....81
5.11.6.2 Possible ITS architecture and ITS-S services....81
5.11.6.3 Possible implementation scenarios options....81
5.12 Integration of C-ITS in Public Warning System....81
5.12.1 ITS service introduction....81
5.12.2 Natural disaster alert use case....81
5.12.2.1 High level description....81
5.12.2.2 Possible ITS architecture and ITS-S services....82
5.12.2.3 Use case analysis....83
5.13 Void....83
6 Conclusions....83
6.1 Introduction....83
6.2 Impacts on Release 2 standards....83
6.3 Summary of the Release 2 basic set of ITS applications and associated use cases....83
Annex A: Bibliography....86
History....87

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables (European Standard (EN), Technical Specification (TS), Group Specification (GS) or ETSI Standard (ES)) may have been declared to ETSI. The declarations pertaining to these essential IPRs, if any, are publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI IPR online database.

Pursuant to the ETSI Directives including the ETSI IPR Policy, no investigation regarding the essentiality of IPRs, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

DECT™, **PLUGTESTS™**, **UMTS™** and the ETSI logo are trademarks of ETSI registered for the benefit of its Members. **3GPP™**, **LTE™** and **5G™** logo are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners. **oneM2M™** logo is a trademark of ETSI registered for the benefit of its Members and of the oneM2M Partners. **GSM**® and the GSM logo are trademarks registered and owned by the GSM Association.

Foreword

This Technical Report (TR) has been produced by ETSI Technical Committee Intelligent Transport Systems (ITS).

Modal verbs terminology

In the present document "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the ETSI Drafting Rules (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

Introduction

The present document is a guiding document for the ITS Release 2 set of standards. It provides the main functional needs and system expected context for the realization of Release 2 and beyond ITS services. The present document is part of a set of the ITS Release 2 leading document.

The present document is a new version to trigger first ITS Release 2 standards development and may be further updated till a final version is released which identifies the complete base set of ITS applications supported by the ITS Release 2 and beyond set of standards.

In this case final means the set which is the reference for ITS Release 2 and beyond interoperable equipment realization.

The present document includes the base ITS Release 2 ITS Services, ITS Applications, and ITS use cases, including their high level functional and system needs relevant for the realization of the ITS Release 2 and beyond standards interoperability.

1 Scope

The present document identifies ITS services, supporting ITS applications functional and system needs, as well as related use cases which are intended to be the baseline for the development of the set of ITS Release 2 and beyond standards.

The identified ITS services and use cases do not constitute an exhaustive list and new ones could be included in a new version of the present document.

2 References

2.1 Normative references

Normative references are not applicable in the present document.

2.2 Informative references

References are either specific (identified by date of publication and/or edition number or version number) or non-specific. For specific references, only the cited version applies. For non-specific references, the latest version of the referenced document (including any amendments) applies.

NOTE: While any hyperlinks included in this clause were valid at the time of publication, ETSI cannot guarantee their long-term validity.

The following referenced documents may be useful in implementing an ETSI deliverable or add to the reader's understanding, but are not required for conformance to the present document.

[i.1] SAE J3016 (2021): "Taxonomy and definitions for terms related to driving automation systems for on-road motor vehicles".

[i.2] SAE J3216: "Taxonomy and Definitions for terms related to Cooperative Driving Automation for On-Road Motor vehicles".

[i.3] CAR 2 CAR Communication Consortium: "Guidance for day 2 and beyond roadmap".

[i.4] ETSI TR 103 832: "Intelligent Transport Systems (ITS); Vehicular Communications; Basic Set of Applications; Study on ITS Support for Pre-Crash based Applications; Release 2".

[i.5] ETSI TS 122 268 (V16.4.0): "Digital cellular telecommunications system (Phase 2+) (GSM); Universal Mobile Telecommunications System (UMTS); Public Warning System (PWS) requirements (3GPP TS 22.268 version 16.4.0 Release 16)".

[i.6] ETSI TS 103 831: "Intelligent Transport Systems (ITS); Facilities Layer; Decentralized Environmental Notification Service; Release 2".

[i.7] Void.

[i.8] ETSI TR 103 582: "EMTEL; Study of use cases and communications involving IoT devices in provision of emergency situations".

[i.9] EU EIP (European ITS Platform): "Reference Handbook for Harmonised ITS Core Service Development in Europe".

[i.10] TR 17828:2022: "Road Infrastructure - Automated vehicle interactions - Reference Framework Release 1", (produced by CEN).

[i.11] Void.

[i.12] Void.

[i.13] ETSI TR 103 300-1: "Intelligent Transport Systems (ITS); Vulnerable Road Users (VRU) awareness; Part 1: Use cases definition; Release 2".

[i.14] ETSI TS 103 300-2: "Intelligent Transport Systems (ITS) ; Vulnerable Road Users (VRU) awareness; Part 2: Functional Architecture and Requirements definition; Release 2".

[i.15] ETSI TS 103 300-3: "Intelligent Transport Systems (ITS); Vulnerable Road Users (VRU) awareness; Part 3: Specification of VRU awareness service; Release 2".

[i.16] ISO 23374-1: "Intelligent transport systems — Automated valet parking systems (AVPS) — Part 1: System framework, requirements for automated driving and for communications interface".

[i.17] ISO 11783-10: "Tractors and machinery for agriculture and forestry Serial control and communication data network".

[i.18] ETSI TS 102 182: "Emergency Communications (EMTEL); Requirements for communications from authorities / organizations to individuals, groups or the general public during emergencies".

[i.19] Daniel Câmara, Christian Bonnet, Michelle Wetterwald, Navid Nikaein: "Multicast and virtual roadside units for multi technology alert messages dissemination", WMAPS 2011, 1st International Workshop on Mobile Ad-Hoc Networks for Public Safety Systems, October 21, 2011, Valencia, Spain.

[i.20] ETSI TR 103 902: "Intelligent Transport Systems (ITS); ITS Framework; Terms, Symbols and Abbreviations; Release 2".

[i.21] ETSI TS 101 607 (V1.2.1): "Intelligent Transport Systems (ITS); Cooperative ITS (C-ITS); Release 1".

3 Definition of terms, symbols, and abbreviations

3.1 Terms

For the purposes of the present document, the terms given in ETSI TR 103 902 [i.20], SAE J3016 [i.1], SAE J3216 [i.2] and the following apply:

ETSI Release 2 cooperative vehicle and RSE: vehicle and roadside equipment which conforms to the set of ETSI TC ITS standards published for the support of partly and fully automated vehicles and identified as the "Release 2" set of standards

fully automated vehicle: cooperative vehicle of level 4 to 5 which do not require the presence of a human diver in it

NOTE: A central supervisor needs to monitor the progression of such vehicle and be capable to act remotely (teleoperation) on it if necessary.

implementation scenario: sequence of actions controlled by an ITS application to achieve a given goal relatively to an identified use case

partly automated vehicle: cooperative vehicle of level 1 to 3 which requires a human presence in it

NOTE: Such vehicle may move in an automated driving mode according to its ADASs equipment and the road infrastructure operational capabilities. However, when required, the human driver may be instructed to take back the control of a vehicle moving in an automated mode.

relevant vehicle: cooperative vehicle which is locally impacted during the execution of an ITS service supported by a given ITS application

subject vehicle: cooperative vehicle which executes an action to achieve an ITS service

target vehicle: cooperative vehicle which needs to actively participate in the accommodation of one or several subject vehicle(s) action to reach a particular goal

use case: specific mobility situation which benefits from the efficient support of an ITS application to provide an ITS service to ITS users

3.2 Symbols

Void.

3.3 Abbreviations

For the purposes of the present document, the abbreviations given in ETSI TR 103 902 [i.20] apply.

4 Basic principles

4.1 Introduction

Basic principles are necessary to develop a common understanding of the current aspects which are driving the development of Intelligent Transport Systems (ITS) and then the specification of standards which are judged necessary to support their deployment.

Automated vehicles are robots which are controlled by Information and Communication Technologies. These robots are moving with a high dynamic in constrained environment delimited by road infrastructures or sometimes evolving out of them (e.g. for agriculture vehicles). Then the road safety is a key aspect which needs to be considered in priority.

Automated vehicle cannot be autonomous, they need to be assisted by the road infrastructure and need to stay always under the control of their users/owners (even remotely). They need to respect the existing traffic code and all other regulations which are applicable at the European and Member States levels for transport systems.

ITS is a very complex domain which includes many different situations giving birth to a large diversity of use cases which need to be supported by ITS applications which have to be flexible enough to adapt to this large diversity.

4.2 ITS services, ITS applications, Use Cases, and Implementation Scenarios

4.2.1 Introduction

An ITS Service is intended to realize a specific transport related positive effect of any kind for a transport physical user (e.g. driver, for a non-ITS automated system). In principle a service is realized by an application. For the realization of the service, an application can use its own sensors but can also use data from other sources which provide their own services realized by applications. In Cooperative ITS (C-ITS, subset of ITS) for instance there are the warnings generated by one ITS-S and used by one other ITS-S. In this case there is an application which at the dissemination ITS-S is sending the warning to the other stations and at the receiving ITS-S an application which provides the information to the appropriate user. An ITS Service is user specific, which is realized by an application and could be realized based on information uses from other services realizing applications inside the ITS-S as well as by other ITS-Ss.

As ITS services are expected to be provided in different situations, they can be provided by ITS applications covering single, simple, more complex use cases under various conditions often identified by implementation scenarios (see Figure 1). Use cases and associated implementation scenarios identify specific environmental conditions as well as all participants in a timely, positional, and relational situation in a detailed manner.

As the present document identifies the applications at high-level, only those implementation scenarios related needs which are relevant will be included as part of the use case needs in the present document. An ITS service could support a single or multiple use case(s).

For instance, a Road Work Warning (RWW) service could support a use case which ensures a safe way through the RWW but it can also support a use case which informs road users about RWW so they can decide to take a different route. There are two completely different use cases from which the first is a C-ITS safety related use case while the second is not safety related. The first also has different system needs than the second. The present document recognized these aspects from a high-level perspective.

Figure 1 presents the relationship between ITS Service, ITS Application, use cases and implementation scenarios.

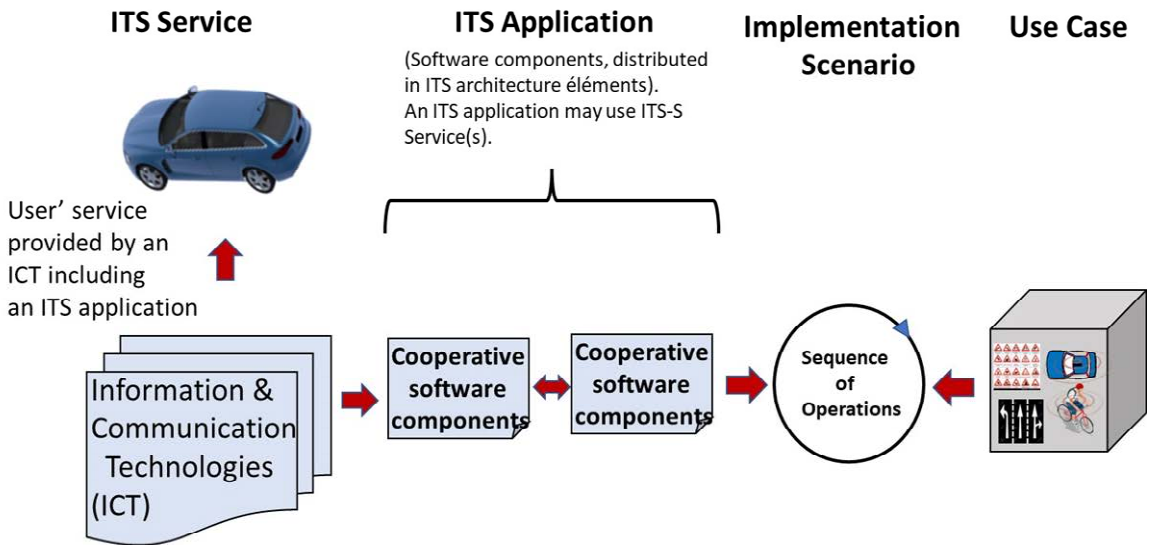


Figure 1: Relationship between ITS service, ITS application, use cases and implementation scenarios

4.2.2 ITS Services (ITSs)

ITS Services are all transport related. These can be logistics related, statistics, maintenance, safety, market specific or general. ICT systems can be tailored to a specific group of interested parties or can be general leading to different system requirements. At present there are several privately specified systems which do not require interoperability and therefore are not standardized. At present there is only one system which requires interoperability and that is Cooperative ITS. In future others could be identified.

4.2.3 Cooperative ITS (C-ITS)

Cooperative ITS is characterized by its information sharing mechanism. In Cooperative ITS there is no difference made between any of the participants in the information sharing and no one is excluded. In principle every participant is equal to any other and all have the same rights and obligations. There is no specific owner of the system, it is a free public system. To ensure the proper operation of such a system ITS-Ss should behave in a specific way and it should be possible to trust the received information. This ECOsystem specific need and the definition are not identified in the present document but are in the related Release 2 specific documents.

Cooperation information sharing can be for the following reasons:

- To inform others of interesting events or presence of specific scenarios all non-safety.
- To inform others of safety relevant situations.
- To communicate about individual automotive movement interests with common safety relevance.

SAE J3216 [i.2] identifies Cooperative Driving Automation (CDA) aiming to improve the safety and flow of traffic and/or facilitate road operations by supporting the movement of multiple vehicles in proximity to one another.

4.2.4 ITS Applications

ITS Applications are pieces of software which are distributed in ITS architecture elements (VRU portable devices, vehicles, roadside equipment, and central equipment). These applications are realizing the ITS Services which are proposed to road users.

ITS Applications need to be supported by standard communication services which are enabling the exchange of information between their distributed elements which need to interact together during their operation.

4.2.5 Use Cases

Use cases are traffic situations which need the support of ICT to achieve one or several identified road users' goals. They include dynamic mobile objects (VRUs and vehicles) moving on identified road topologies and off-roads (e.g. for agricultural use cases). They also include static objects which are used on purpose for traffic management or are resulting from road hazards.

Several types of ITS architectures and ICTs can be used according to manufacturers' implementation choices.

4.2.6 Implementation Scenarios

Implementation scenarios are the integration of identified use cases with specific ICT solutions and ITS architectures which are selected by their suppliers.

As the selected ITS architecture is always a distributed one (i.e. ICTs at least in two elements of the ITS architecture), the interactions between the distributed elements needs to be interoperable and then require the availability of communication standards.

These communication standards are provided by the ITS Station (ITS-S) and have to be identified in implementation scenarios.

4.3 Safety, Active Safety and Passive-Safety

4.3.1 Introduction

Road safety is a key ITS service which needs to be offered to road users. Three different safety situations can be distinguished:

- Crash avoidance when considering the Time To Collision (TTC) and respective velocities of vehicles which are at risk of collision, it is still possible to act to avoid the collision. The latest possible action is then to trigger the Advanced Emergency Brake System (AEBS) of one or several vehicle(s) being at risk of collision.
- Pre-crash mitigation when it is not possible to avoid the crash between two or more vehicles. In this case according to TTC everything is achieved to reduce the effects of impacts on vehicles' occupants (adjusting seat belts, triggering relevant airbags, adjusting headrest, etc.).
- Post-crash (also called passive safety) which consists of triggering the emergency call and facilitate the rescue to reach as soon as possible the location of the crash.

4.3.2 Active safety - Crash Avoidance

Such active safety has the goal to avoid crashes between two or more mobile objects or between one mobile object and one static object.

To achieve such goal, the ITS architecture elements need cooperating to anticipate a risk of collision to be able to act in time to avoid it.

Anticipating a risk of collision and acting in time to avoid it requires to be able to predict such risk and estimate the Time To Collision (TTC) to verify that being given the local context (e.g. traffic, meteorological, human, technical, etc.) it will be possible to avoid the identified predicted collision.

Then, the goal of the active safety-crash avoidance ITS Application is to have the capability and means to avoid crashes between mobile objects (VRUs, Vehicles, etc.) and between mobile objects and static objects.

The Automated Emergency Brake System (AEBS) is typically a crash avoidance system which is already mandatory for many types of new vehicles' models. AEBS can be triggered by vehicle sensors (for example the front camera or lidar). Cooperative ITS enables the AEBS triggering from a remote ITS-S, providing an increased security level.

4.3.3 Active safety - Pre-crash mitigation

When it is not possible to avoid a crash, it can be possible to reduce as much as possible its effects on occupants of involved vehicles or VRUs.

Such goal requires also to predict and identify the risk of collision but, with a TTC which does not allow to act to avoid it. In such situation it is possible to be active to mitigate the effects of the collision on occupants of involved vehicles or on VRUs.

Pre-crash mitigation requires the availability of means in the involved vehicles which can be triggered in time for such purpose:

- Airbags which can be triggered several hundreds of milliseconds before the crash where it is necessary according to the predicted impacts.
- Seat Belts which can be adjusted according to the predicted impacts energies.
- Headrests which can be positioned according to the predicted impacts and their energies.
- Etc.

For VRUs, it is possible to trigger vehicle external mechanisms (e.g. airbags) to reduce/absorb the impact energy.

Then, the goal of the ITS Application is to actively mitigate the effect of an unavoidable collision on occupants of vehicles which are involved in the collision [i.4].

4.3.4 Passive Safety

Passive safety means that either the crash has not been avoided, but even if mitigated, it is necessary to trigger an emergency rescue because the impacts between mobile objects or between mobile and static object may have caused road users' injuries which need to be treated.

The main mean to be used is the emergency call (eCall) which enable to find the more appropriate rescue organization to be requested according to the location of impacted mobile object and other criteria associated to the impacts.

Moreover, when a rescue is triggered, it is necessary to facilitate the mobility of the rescue vehicles by creating emergency corridors.

Then, the goal of the ITS Application is to accelerate the arrival of rescue teams directly on the spot of a road accident.

4.3.5 Operational Safety Requirements

The system operational safety considers the system behaviour in abnormal situations of hardware/software failures (functional safety aspects), cyberattacks (security aspects) or human modification of the system (e.g. voluntary degradation of a specific vehicle function).

The main standardization supply to ITS applications is the provisioning of basic services consisting of disseminating standard messages which are received by ITS-S and used for specific purposes related to the targeted cooperation class.

Standard messages are received by vehicles which need to interpret them to discover the specific purpose associated to them. Receiving vehicles keep their responsibility to use a received message or not.

Before using a received message, this one can be verified when passing through the various layers of protocols being present in the selected communication profile:

- Then the security protocol verifies the authenticity of the source of the message and may detect a non-authorized source leading to a reject of the message and its signalling to relevant authorities.
- The facilities layer may also check the message payload which is used by the ITS application to decide how to use it to achieve its service purpose (i.e. increase the perception of the vehicle, decide to contribute or not to a collective action).

On this basis, the main operational safety risk is the reception of messages which are resulting from a defect of the originating source (hardware, software, data acquisition), or from a cyberattack attempting to manipulate the receiving ITS-S.

Several operational safety requirements can be derived to counter either a defect of the message source or a cyberattack:

- **OSR01:** A message integrity check can be executed to verify that the message is complete and that its structure is complying to the reference standard.
- **OSR02:** A message consistency check can be achieved to verify the existing consistency between relevant data elements values which are provided in the message.
- **OSR03:** A message plausibility check can be achieved to verify the plausibility of the value of some relevant data elements either at the time of reception or in comparison between two consecutive messages.
- **OSR04:** If the result of at least one of the verifications achieved is negative, the message needs to be discarded and a misbehaviour detection needs to be sent to the relevant security authority.
- **OSR05:** According to the cooperation class (e.g. Cooperative driving class), a misbehaviour detection can also be signalled to partners of a collective action, including during its triggering phase.

4.4 Automation Levels

4.4.1 Introduction

Transport Automation is driven by vehicle automation but also has impact on transport infrastructure. Within the automotive industry Automation levels have been defined and referred to as SAE levels.

According to SAE J3016 [i.1], automated vehicles can be classified into 6 levels from 0 to 5. Each level determines a level of automation:

- **Level 0: No Driving Automation.** Human does all driving.
- **Level 1: Driver Assistance.** Longitudinal OR lateral vehicle motion control.
- **Level 2: Partial Driving Automation.** Longitudinal AND lateral vehicle motion control.
- **Level 3: Conditional Driving Automation.** The vehicle may fully take control of the driving responsibility under some conditions. A human driver is always present in the vehicle, hands on the steering wheel.
- **Level 4: High Driving Automation.** At this level, the vehicle can be driven by a human, but he does not ever need to be present.
- **Level 5: Full Driving Automation.** The vehicle can move everywhere without the support of a human driver. No need to have a steering wheel.

4.4.2 Partial Automation

Partial automation covers vehicles of SAE levels 1 to 3 which are equipped with ADASs which enable them to move during identified limited times in an automated driving mode.

The automated driving time periods are conditioned by the availability of roads which have the capabilities required to support the evolution of automated vehicles (e.g. required horizontal marking, required vertical signalling, RSE providing augmented perception in critical safety spots).

Longitudinal vehicle motion control needs the delimiting of lanes enabling the use of the Active Lane Keeping (ALK) ADAS which maintains the automated vehicle in road marked lanes. ACC and C-ACC are used to maintain the minimum time inter-distances between vehicles.

Lateral vehicle motion control needs the capability of the vehicle to eliminate blind spots and then to know via the road horizontal marking or/and the road vertical signalling, when it is possible/authorized for it changing of lane/road.

When in an automated driving mode, a vehicle needs to be capable of avoiding crash and for this purpose needs to be supported by the road infrastructure and have the required level of perception. The AEBS needs to be available if an automated emergency brake is required.

Even if both vehicle motion controls can be activated, one driver has to remain present in the automated vehicle to take back its driving control in case of necessity.

4.4.3 Full automation

Full automation corresponds to SAE levels 4 and 5.

Level 4 corresponds to the automated driving of the vehicle in a driving environment which was designed for such purpose. Then the vehicle can move in an automated driving mode only in environments which have the capabilities to support such automated driving mode.

Level 5 corresponds to the automated driving of the vehicle in all possible driving environments which are existing in its operation region. Such automation level can be made possible if both the vehicles and the road infrastructures offer the required capabilities (Operational Design Domain (ODD)) to support such level of automation.

A level 4 and level 5 automated vehicle can be moving without a human driver in it.

But levels 4 and 5 automated vehicles moving without drivers in them need to be remotely supervised with the objective to remotely act (tele-operation) in case of failure (hardware/software defect) or malicious/cyberattack.

4.4.4 Cooperative Driving

From SAE J3216 [i.2], Cooperative Driving Automation (CDA) aims to improve the safety and flow of traffic and/or facilitate road operations by supporting the movement of multiple vehicles in proximity to one another.

This is accomplished, for example, by sharing information that can be used to influence (directly or indirectly) DDT performance by one or more nearby road users.

Cooperative Driving Automation distinguishes the four following classes of cooperation in order of increasing amount of cooperation:

- Status-sharing.
- Intent-sharing.
- Agreement-seeking.
- Prescriptive.

C2C-CC has published a guide for day 2 and beyond roadmap [i.3] which identifies 3 classes of cooperative services:

- Awareness Driving (day 1).
- Sensing Driving (day 2).
- Cooperative Driving (day 3 and day 3+).

Differences exist between these two classes of cooperation approaches, though some similarities can be established:

- The SAE status-sharing is equivalent to the C2C-CC awareness driving as mainly status are exchanged between vehicles (e.g. CAMs, DENMs, CPMs) and between vehicles and roadside equipment (e.g. DENM, IVI, SPAT/MAP). However, the awareness driving (CAM) also contains some intent-sharing (e.g. intent to turn left or right, path prediction).

- The SAE intent-sharing could also be equivalent to C2C-CC awareness driving when optional data elements such as "path prediction" are used. This is possible at the CAM and VAM level.

- The SAE agreement-sharing and prescriptive can be covered by the C2C-CC cooperative driving.

4.4.5 Cooperation classes

From clause 4.4.4, the following principles of cooperation can be declined in three classes of cooperation:

- Awareness driving consisting to status-sharing. Vehicles as the road infrastructure share their environmental perceptions. This is increasing the autonomous perception of vehicles which is limited to their sensor's capabilities and other factors such as sensing limitations due to the road topology, weather conditions, fixed and mobile obstacles on the road, etc.

- Intent-sharing. Providing intents enables vehicles and VRUs to inform others of their short-term movements (for example, changes in their reference trajectories) with the objective to develop collective actions increasing the road safety and traffic efficiency. This class focuses on "prediction" of vehicle/VRU dynamic.

- Cooperative driving based on manoeuvre coordination. Once agreed or legally required, collective actions can be achieved via vehicles' cooperation or central tele-operation (for example by the road infrastructure or a central supervisor).

NOTE: Cooperative driving can be decomposed into more classes (for example: Agreement-Seeking and Prescriptive) depending on the respective traffic rights of road users and other stakeholders (police, emergency services, road operators, public transport operators, etc.) and the origin of the manoeuvre coordination service triggering.

4.4.6 Mixed traffic management

All vehicles' automated levels will be cohabiting (mixed traffic) for a long time on European roads:

- The deployment of fully automated vehicles will be slow as many conditions are required to become a reality (full deployment of C-ITS, capability of the road infrastructure, 5G full coverage, availability of accurate, complete digital maps, etc.).

- The life cycle of in-service vehicles is long (average between 10 to 15 years).

- The customer acceptability for automated vehicle is uncertain as many customers like driving vehicles especially powerful vehicles.

- The EC does not foresee a full deployment of automated vehicles before 2050.

For a long time, in-service vehicles will exhibit various automated levels, from the basic one which are currently using the ABS or ESP to most elaborated ones of level 4 or 5.

Therefore, all in-service vehicles will not have the capability to cooperate. This is resulting to a mixed traffic management which requires to be considered at the ITS Applications level and their supported use cases and implementation scenarios.

Such mixed traffic situation is not specific to a given use case but will affect all use cases.

Several mixed traffic management requirements can be studied to cope with this long-term mixed traffic situation:

- **MTR01:** The category of an in-service vehicle can be indicated in messages which are exchanged between cooperative vehicles (e.g. level of automation in CAMs).

- **MTR02:** All mobile and static objects need to be detected and signalled by cooperative ITS-S (vehicles and RSUs) especially in areas offering a limited perception (e.g. intersections, road curves, high of a slop, perception obstacle, etc.).
- **MTR03:** As a non-connected vehicle cannot be cooperating with others, the evolution of this one, when detected and signalled, needs to be monitored in real time to predict as much as possible its evolution.
- **MTR04:** As a non-connected vehicle is likely a human driven one, it becomes necessary for cooperative vehicles to consider the human factors, when the vehicle can be detected and signalled, to decide further actions.

5 ITS Services, Applications and use cases

5.1 Introduction

ITS Applications are developed to provide ITS services to road users. Often, ITS Applications are pieces of software which can be downloaded and updated in relevant functional entities to provide the ITS Services. ITS Applications are generally applicable to a generic sample of use cases.

The present document focuses on ITS Applications (Basic Set of Applications) providing ITS Services in particular mobility situations identified as use cases.

ITS Applications are generally distributed in several functional categories (VRUs' devices, vehicles' On-Board Units, Roadside Units, Central systems) which can be in the different functional categories of the ITS reference architecture. ITS Applications are supported by standard ITS-Stations (ITS-S) which provide them standard basic services to achieve their functional and operational objectives.

ITS Applications are regrouped in clause 5 within ITS Services. ITS applications are summarized (high level description) and generic functional and system requirements are provided for each one. Examples of implementation aspects are then provided.

5.2 Partial and high automation

5.2.1 ITS Service introduction

ITS applications categories "Partial Automation" make use of ITS service to trigger and control automated reactions at vehicles with low (i.e. L1 - L2 vehicles where the driver is still in charge of driving and monitoring tasks) as well as high automation capabilities (L3 + vehicles where the driver is released partially or totally from its monitoring and driving responsibilities). In this context, vehicles V2X communication and ITS-S services extend the capabilities of traditional ADASs and automated functions providing longer and non-line of sight detection ranges, as well as explicit communication of information between senders and receivers.

It has to be noted that the level of the vehicle automation is depending on:

- The availability of ADASs capabilities.
- The activation of these ADASs capabilities. Even if an ADAS capability is available at the level of the vehicle, this one could not be activated to leave to the driver the pleasure to drive its vehicle if requested.

It has also to be noted that the vehicle trajectory can be totally automated according to activated ADASs. Then the vehicle trajectory can be influenced by acting on relevant ADASs. This is something to be considered at the level of manoeuvres' coordination service.

5.2.2 Hazardous Location Notification - Vehicle Support Use Case

5.2.2.1 High level description

The specific goal of this use case is to provide ITS-S applications at receiving vehicles with more time and information to better assist semi-automated (ADAS) or automated reactions in presence of unexpected road hazards. A transmitting ITS-S notifies incoming traffic about occurrence, details, and evolution of a hazardous situation via DENMs. ITS-S applications at receiving vehicles process the information contained in DENMs, run a relevance check to understand if a given automated reaction is needed and, depending on the type and details of the hazards, the current vehicle status, and relative dynamics, apply the most suitable reaction.

Figure 2 shows a situation which is at the origin of a hazardous location notification. A road operator' stationary patroller (acting as an RSU) signals the road hazard and may guide approaching vehicles to drive round the obstacle.

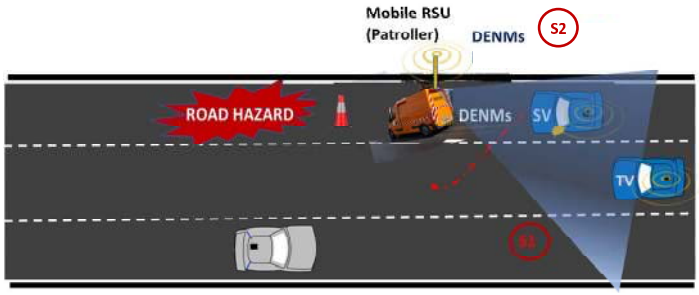


Figure 2: Hazardous location notification use case

5.2.2.2 Possible ITS architecture and ITS-S services

Architecture A: In this first architecture the use case runs among vehicles only. A transmitting vehicle triggers transmission of DENMs after detection of a hazardous situation and continuously updates the DENM content to describe possible evolution of the hazardous situation or its contextualization to the driving environment (e.g. lane, zone, road configuration where the hazard exists). One or multiple receiving vehicles approach the hazard location.

Architecture B: In this second architecture the use case runs with the help of a roadside ITS-S (Figure 2). the hazardous situation is detected, communicated, and updated by a roadside ITS-S.

ITS-S services:

The following service can be used to signal and guide approaching cooperative vehicles:

- The Decentralized Environmental Notification Service (DENS) which signals the road hazard to approaching cooperative vehicles.

5.2.2.3 Possible implementation scenarios

Implementation Scenario 1:

The first implementation option refers to Architecture A. The DENMs transmitted by the vehicle ITS-S reflect the type of hazard, the location where it applies, the area and traffic direction where vehicles have to be aware of it, possible additional information that can help receiving vehicles to take reaction decisions (e.g. lane or geographical zone where the event is occurring, the speed limit that should be applied when approaching the event, the road configuration of the road segments where the event happens).

Implementation Scenario 2:

This second implementation option refers to architecture B. A road operator patroller was sent to secure a detected road hazard. This patroller is acting as an RSU disseminating DENMs to approaching cooperative vehicles. As for Scenario 1, data elements are received by approaching cooperative vehicles, are analysed, and used if judged relevant.

5.2.2.4 Implementation scenario flow diagram

Figure 3 shows a flow diagram model (model 1) which describes the messages exchanges between cooperative ITS-Ss.

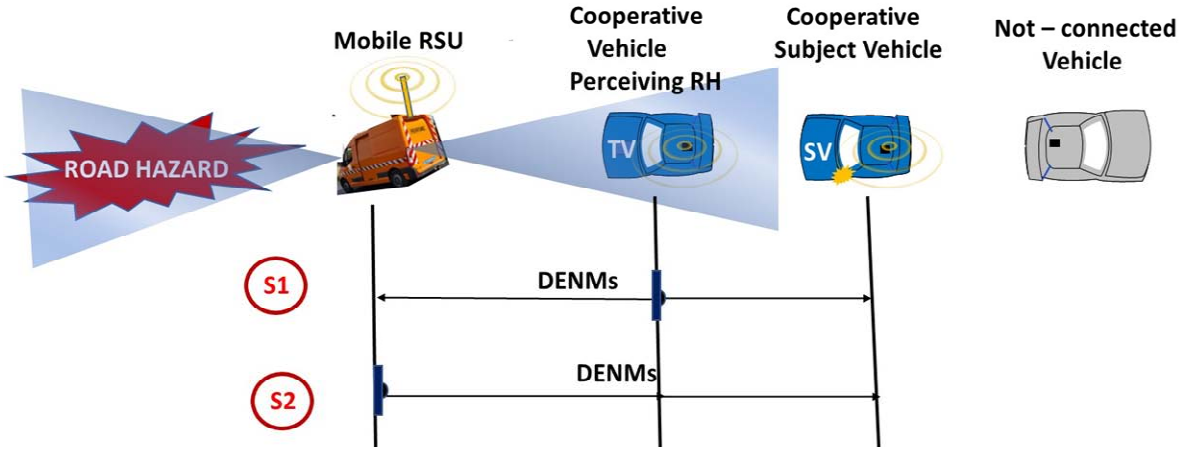


Figure 3: Flow diagram model 1, combining DENMs broadcasting

5.2.2.5 Possible implementation scenarios options

Scenarios 1 &2:

According to respective driving modes of cooperative vehicles and their capabilities, a driving mode transition can be beneficial (e.g. from human driven to automated) and the dissemination of new DENMs could be necessary to inform other nearby cooperative vehicles of undertaken manoeuvre.

If the TTC between the subject vehicle approaching with an excessive speed and the road hazard is short (e.g. less than 2 seconds), the mobile RSU may use the prescriptive concept sending an emergency brake instruction to avoid collision of the subject vehicle with the road hazard.

5.2.3 Cooperative Adaptive Cruise Control (C-ACC) use case

5.2.3.1 High level description

The Cooperative Adaptive Cruise Control (C-ACC) ITS application uses continuous communication from a target vehicle to a subject vehicle so that the subject vehicle can dynamically adapt its time gap to the target vehicle and keep it constant to a reduced value which would not be safely possible if only using inputs from front sensors. Applying V2X as an additional real-time input to longitudinal control is demonstrated to improve traffic flow and driving convenience thanks to a reduction of unnecessary braking and throttle manoeuvres.

Figure 4 shows a situation illustrating the C-ACC use case.

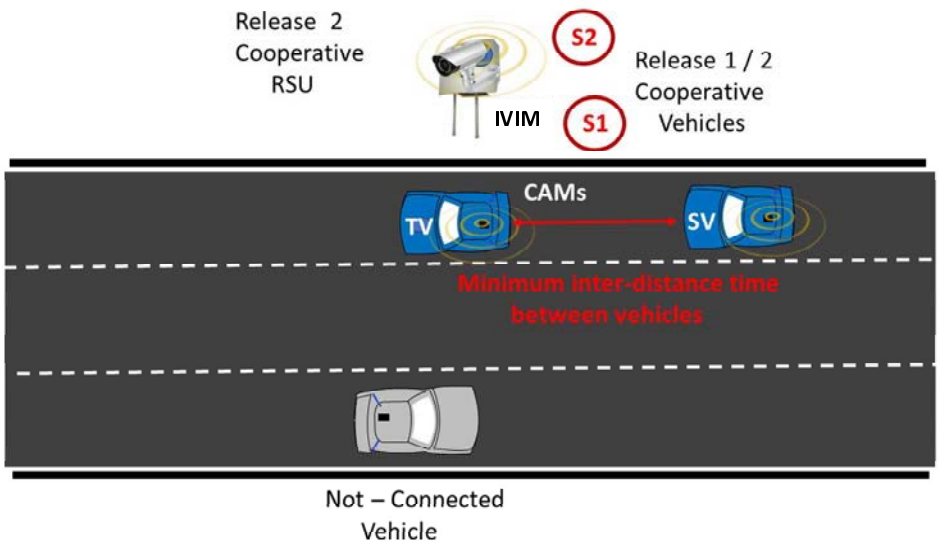


Figure 4: Cooperative Adaptive Cruise Control use case

5.2.3.2 Possible ITS architecture and ITS-S services

The road safety minimum performance requirements lead to focus on the two following possible ITS architectures:

- V2V Cooperation.
- I2V Cooperation combined with V2V.

Possible ITS-S Service:

- CAS provided by the target vehicle.
- IS provided by the RSU.

5.2.3.3 Possible implementation scenarios

Scenario 1: Target Vehicle broadcasts CAMs:

The first ITS-S implementation scenario foresees presence of only two communicating vehicles. A Subject Vehicle (SV) follows a so-called Target Vehicle (TV) and continuously receives from it, CAM messages containing real-time position, as well as current and predicted dynamics.

Scenario 2: Target Vehicle broadcasts CAMs and RSU broadcasts IVIMs:

In this second ITS-S implementation scenario, the two vehicles are complemented by a roadside ITS-S that might provide information influencing their longitudinal control such as regulatory speed limits, speed suggestions, values of the vehicles' minimum time inter-distance, etc.

5.2.3.4 Implementation scenario flow diagram

The following flow diagram (Figure 5) illustrates described ITS implementation scenarios.

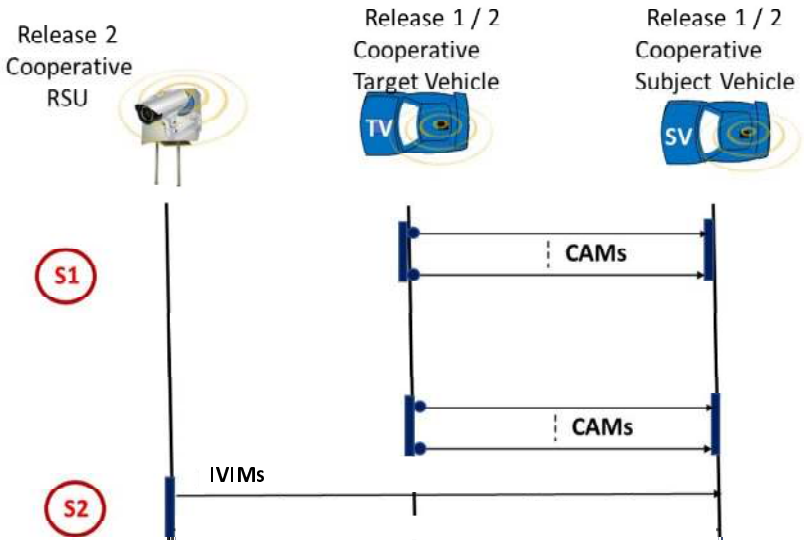


Figure 5: Flow diagram Model 2, combining CAMs broadcasting with IVIMs broadcasting

5.2.3.5 Possible implementation scenarios options

In Scenario 1, the degree of longitudinal control of the two vehicles are related to the information provided by the CAMs. It would be more efficient if the CAM contains the trajectory prediction of the Target vehicle, so enabling the Subject Vehicle to better anticipate its trajectory evolutions.

In scenario 2, the RSU may adjust the longitudinal control of vehicles according to perceived traffic density.

5.2.4 C-ACC string use case

5.2.4.1 High level description

The Cooperative Adaptive Cruise Control (C-ACC) ITS application can be extended if the subject vehicle additionally considers information received from other vehicles preceding target vehicle directly in front of it. If more than two vehicles implement the C-ACC ITS-S application and each of them considers the information of the other vehicles in front, a string of C-ACC vehicles is realized.

Figure 6 shows a situation illustrating the C-ACC string use case.

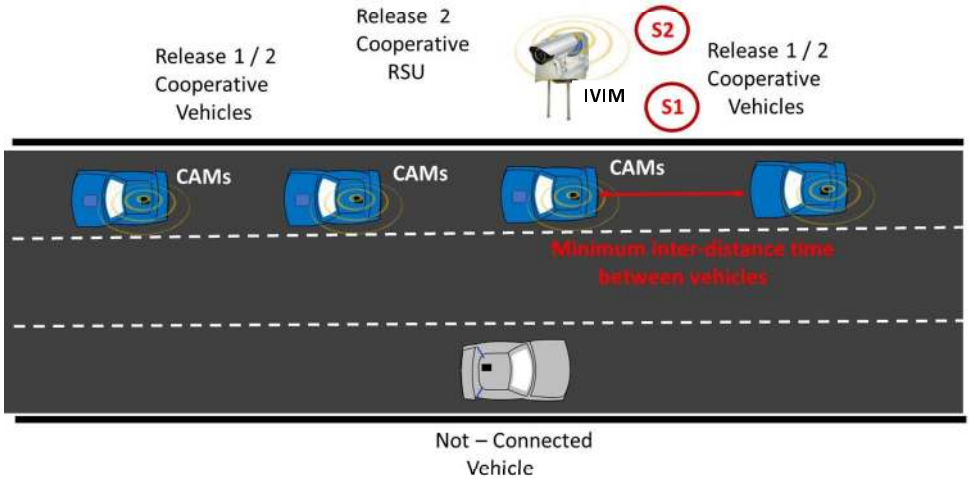


Figure 6: C-ACC string use case

5.2.4.2 Possible ITS architecture and ITS-S services

As for the previous C-ACC use case, the two following possible ITS architectures are considered:

- V2V Cooperation.
- I2V Cooperation combined with V2V.

Possible ITS-S Services:

- CAS provided by all cooperative vehicles ahead of the subject vehicle.
- IS provided by the RSU.

5.2.4.3 Possible implementation scenarios

Scenario 1: All cooperative vehicles ahead of the subject vehicles broadcast CAMs:

In this first scenario multiple communicating vehicles run the C-ACC ITS application. A subject vehicle follows a so-called target vehicle and continuously receives CAMs from it as well as from the other C-ACC vehicles ahead in the string.

Scenario 2: All cooperative vehicles ahead of the subject vehicle broadcast CAMs and RSU broadcasts IVIMs:

In this second scenario, the multiple vehicles are complemented by a roadside ITS-S that might provide information influencing their longitudinal control such as regulatory speed limits, speed suggestion, minimum vehicles' inter-distance time, etc.

5.2.4.4 Implementation scenario flow diagram

The flow diagram Model 2, in Figure 5 is applicable to a string of cooperative vehicles.

5.2.4.5 Possible implementation scenarios options

In scenario 1, the degree of longitudinal control of a subject vehicle is related to the information provided by the received CAMs. It would be more efficient if the CAM contains the trajectory prediction of the Target vehicle, so enabling the Subject Vehicle to better anticipate its trajectory evolutions. Moreover, when the number of ahead cooperative vehicles are increasing the perception of the subject vehicle relatively to the evolution of the traffic becomes more efficient (e.g. detecting and signalling shockwaves).

In Scenario 2, the RSU may adjust the longitudinal control of vehicles according to perceived traffic density and regularity.

5.2.5 Cooperative Adaptive Emergency Brake System (C-AEBS) use case

5.2.5.1 High level description

A Subject Vehicle (SV) applies an automated braking to avoid a crash with another road user, (e.g. a hard braking vehicle). The situation is detected by messages received from Target Vehicle (TV) or other ITS-Ss. The automated braking in the subject vehicle is issued when the time to collision falls below an application threshold (e.g. 2 seconds). This is a semi-automated function, as the driver is requested to be in the loop. The messages from target vehicles can be extended with safety containers for functional safety reasons.

Figure 7 shows a situation illustrating the C-AEBS use case.

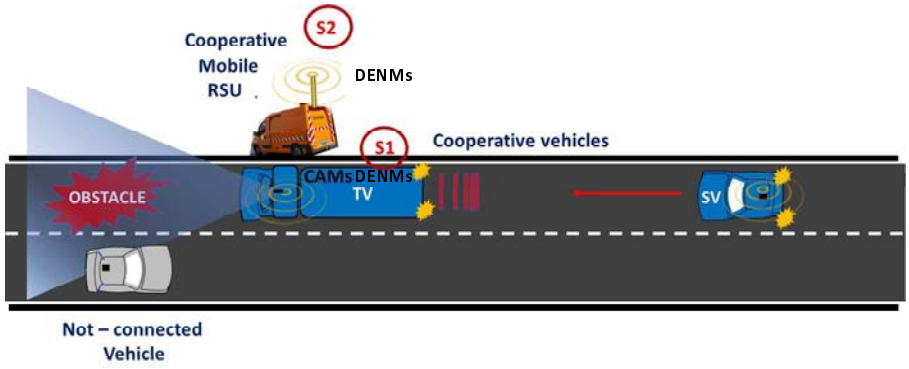


Figure 7: C-AEBS use case

5.2.5.2 Possible ITS architecture and ITS-S services

The road safety minimum performance requirements lead to focus on the two following possible ITS architectures:

- V2V Cooperation.
- I2V Cooperation.

Possible ITS-S Services:

- CAS.
- DENS.

5.2.5.3 Possible implementation scenarios

Scenario 1: V2V consecutive to the reception of CAMs/DENMs:

The Target Vehicle (TV) detects an obstacle on the road which cannot be overtaken because the arrival of another vehicle on the opposite lane. It is then obliged to brake hardly to wait for an opening gap to overtake the obstacle. The subject vehicle detects this strong deceleration of the target vehicles via the received CAMs and or DENMs. According to its TTC value, the subject vehicle may be obliged to trigger its C-AEBS to avoid a collision with the Target Vehicle.

Scenario 2: I2V consecutive to the reception of DENMs:

A mobile RSU protects the area which is closed by an obstacle and broadcasts DENMs to assist arriving Subject Vehicles either to stop in front of the obstacle or overtake it. If the TTC of subject vehicle requires an emergency brake, the mobile RSU prescribes it to avoid a collision with the obstacle or another vehicle (e.g. a not - connected one) waiting in front of the obstacle.

5.2.5.4 Implementation scenario flow diagram

The flow diagram Model 2, in Figure 5 is applicable to this use case.

5.2.5.5 Possible implementation scenarios options

The S2 option can be using an Agreement Seeking concept or a Prescriptive concept according the TTC value and the manoeuvres to be executed (e.g. slowing down, overtaking, or emergency brake).

5.2.6 Advanced Pre-Crash sensing use case

5.2.6.1 High level description

This use case describes the process for information provided by a vehicle V1 or a RSU, when a critical situation is detected, via DENMs including use case specific extensions in an a-la-carte container [i.6]. Each receiving vehicle may activate its Pre-Crash measures when it assumes itself to be under risk and the situation is considered as sufficiently critical (i.e. TTC < 1 second).

Figure 8 shows a situation illustrating the Advanced Pre-Crash sensing use case.

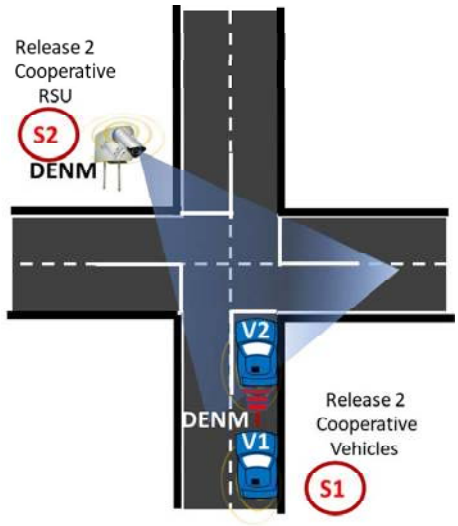


Figure 8: Advanced Pre-Crash sensing use case

5.2.6.2 Possible ITS architecture and ITS-S services

The road safety minimum performance requirements lead to prefer the two following possible ITS architectures:

- V2V Cooperation.
- I2V Cooperation.

Possible ITS-S Services:

- Extension of the DENS, using the "a la carte container" in DENMs [i.6] to characterize the post-crash impacts.

5.2.6.3 Possible implementation scenarios

Scenario 1: V2V, V1 provides information about post-crash prediction:

Cooperative Vehicle V1 detects a high probability of a collision with the vehicle V2 and then broadcasts extended DENMs providing information about the predicted impacts of the collision.

Upon reception of extended DENMs, the cooperative vehicle V2 triggers occupants' protection measures (airbags activation, adjustment of seat belts and headrests, etc.) to mitigate the impacts of the collision on them.

Scenario 2: I2V, RSU provides information about post-crash prediction:

The cooperative RSU detects a high probability of a collision between the vehicles V1 and V2 (i.e. via the reception of their CAMs) and then broadcasts extended DENMs providing information about the predicted impacts of the collision.

Upon reception of extended DENMs, the cooperative vehicle V2 triggers occupants' protection measures (airbags activation, adjustment of seat belts and headrests, etc.) to mitigate the impacts of the collision on them.

5.2.6.4 Implementation scenario flow diagram

The following flow diagram (Figure 9) illustrates the described implementation scenarios.

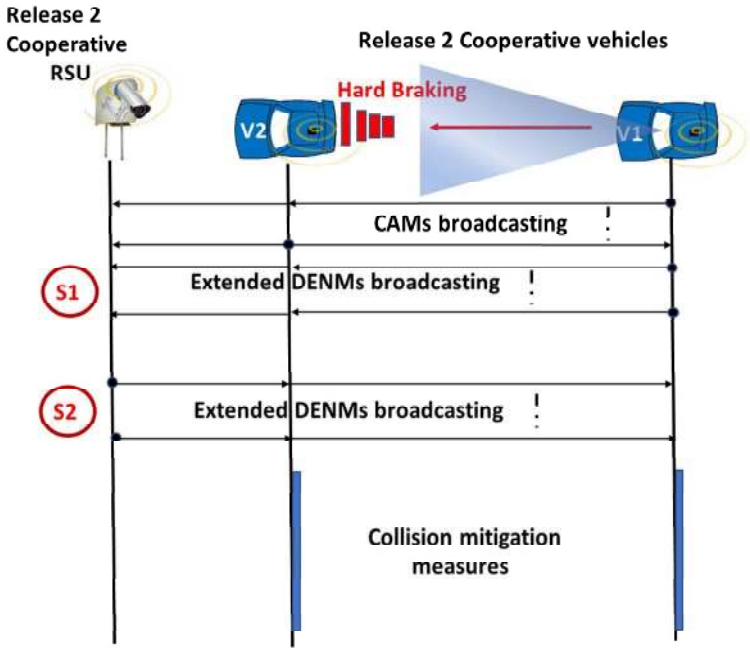


Figure 9: Flow diagram Model 3, applicable to the pre-crash sensing use case

5.2.6.5 Possible implementation scenarios options

See ETSI TR 103 832 [i.4].

The new Release 2.2.1 of DENM (ETSI TS 103 831 [i.6]) provides the standards evolutions for the support of this new application.

5.2.7 Cooperative Active Lane Keeping (C-ALK) use case

5.2.7.1 High level description

The Cooperative Adaptive Lane Keeping (C-ALK) ITS application can be used to protect VRUs in shared areas when occupied by VRUs. In such case, the CCAM vehicles can be notified/instructed to remain in their lane if the shared VRUs protected area is signalled as occupied by VRUs.

NOTE: This use case is also applicable to priority shuttle lane.

More generic use cases are possible when a change of lane is not authorized.

Figure 10 shows a situation illustrating the Active Lane Keeping use case.

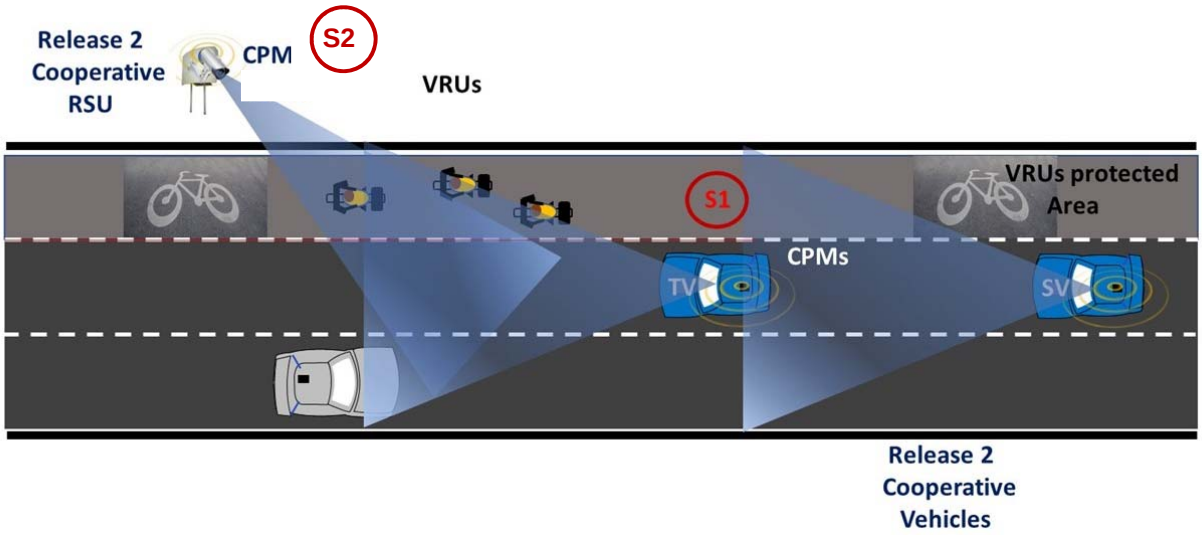


Figure 10: Cooperative Active Lane Keeping use case

A specialization of this use case is protection of a priority lane for autonomous shuttles, buses, etc. In a street with a priority lane, the RSUs instruct the priority vehicle (e.g. shuttle) to change to the protected priority lane. Non-priority vehicles can occupy the lane when no priority vehicles are in but, they are instructed to get out of the priority lane if a priority vehicle is detected approaching.

5.2.7.2 Possible ITS architecture and ITS-S services

The road safety minimum performance requirements lead to preferably focus on the two following possible ITS architectures:

- V2V Cooperation.
- I2V Cooperation.

Possible ITS-S Services:

- CPS provided by a Release 2 cooperative Target Vehicle (TV).
- CPS provided by a Release 2 cooperative RSU.

5.2.7.3 Possible implementation scenarios

Scenario 1: A Release 2 cooperative Target Vehicle signals VRUs using CPS:

In this first scenario the Release 2 cooperative Target Vehicle (TV) perceives VRUs progressing on the VRUs protected area. TV signals perceived VRUs broadcasting CPMs.

Upon reception of CPMs, the Subject Vehicle (SV) may decide to transit to automated driving and to activate its Active Lane Keeping assistance to avoid entering the VRUs protected area.

Scenario 2: A Release 2 cooperative RSU signals VRUs using CPS:

In this second scenario, the Release 2 cooperative RSU perceives a group of VRUs progressing on the VRUs protected area. Then the RSU signals them broadcasting CPMs.

Upon reception of CPMs, the Subject Vehicle (SV) may decide to transit to automated driving and to activate its Active Lane Keeping assistance to avoid entering the VRUs protected area.

5.2.7.4 Implementation scenario flow diagram

The following flow diagram (Figure 11) illustrates described ITS implementation scenarios.

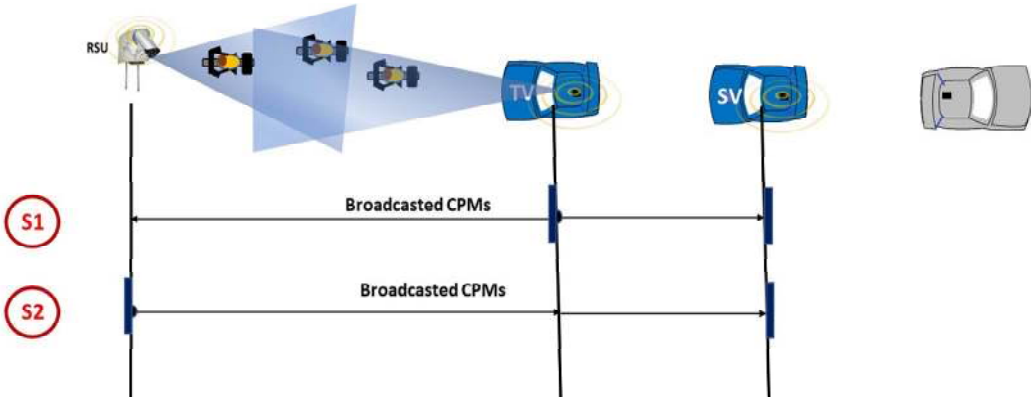


Figure 11: Flow diagram Model 4

5.2.7.5 Possible implementation scenarios options

In scenarios 1 and 2, the subject vehicle may decide to activate its active lane keeping if available.

5.2.8 Cooperative Intelligent Speed Adaptation (C-ISA) use case

5.2.8.1 High level description

The Cooperative Intelligent Speed Adaptation ITS application can be used to avoid collision or better manage the traffic in adverse contextual conditions (e.g. adverse weather conditions, adverse traffic conditions, etc.). In such case, the CCAM vehicles can be notified/instructed to adjust their speeds to the adverse contextual conditions.

Figure 12 shows a situation illustrating the Intelligent Speed Adaptation use case.

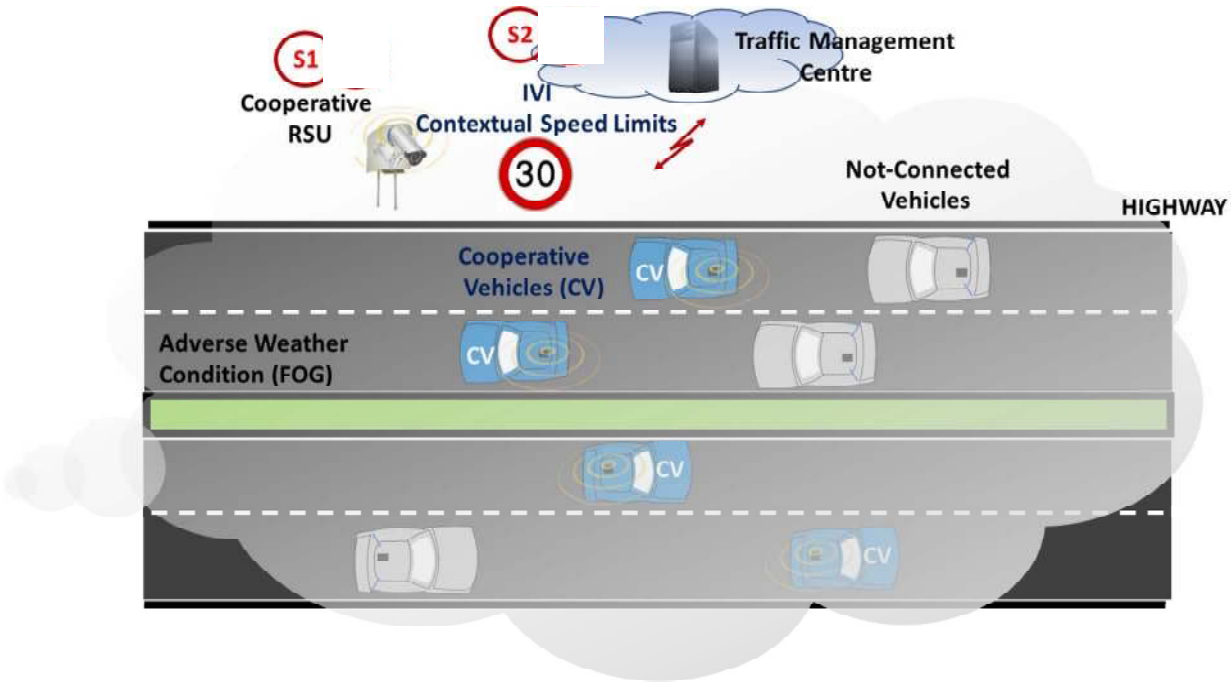


Figure 12: Cooperative Intelligent Speed Adaptation use case

5.2.8.2 Possible ITS architecture and ITS-S services

The two following ITS architectures seems the more appropriate for this use case:

- I2V Cooperation.
- C2V Cooperation.

Possible ITS-S Services:

- Contextual Speed Limit provided by RSU using IVI.
- Contextual Speed Limit provided by a central traffic management centre using IVI.

5.2.8.3 Possible implementation scenarios

Scenario 1: A RSU broadcasts contextual speed limits using IVI:

The cooperative RSU disseminates contextual speed limits using IVI messages. All receiving cooperative vehicles adjust their speed below the speed limit.

Scenario 2: A central traffic management centre disseminates contextual speed limits using IVI:

The central management system disseminates contextual speed limits using IVI messages. All receiving cooperative vehicles adjust their speed below the speed limit.

5.2.8.4 Implementation scenario flow diagram

The following flow diagram (Figure 13) illustrates described ITS implementation scenarios.

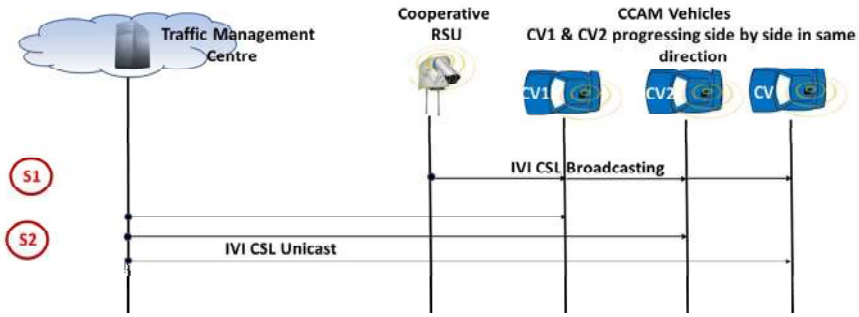


Figure 13: Flow diagram Model 5

5.2.8.5 Possible implementation scenarios options

The S3 option is only possible when the density of cooperative vehicles reaches a certain level to be identified.

5.2.9 Void

Figure 14: Void

Figure 15: Void

5.2.10 Void

Figure 16: Void

5.2.11 Infrastructure support for ADS use case

5.2.11.1 High level description

Road infrastructure support to Automated Driving Systems (ADS) is important to allow vehicles to stay inside their Operational Design Domain (ODD) as long as possible, and/or to enlarge their ODD. In fact, both partly and fully automated vehicles will need additional support from infrastructure beyond the vehicle's sensor capability to maintain higher functions of automation for longer periods in time and longer stretches of road network.

Early attempts were focused on vehicle metrics like SAE level, but infrastructure soon realized that it cannot decide on levels of automation or the automated mobility ODD by itself, shifting its focus more on concepts like ISAD (Infrastructure Support levels for Automated Driving, see TR 17828 [i.10]). These levels include both the physical and visible infrastructure support (level E) as well as the various levels of digital support (level D to A). While being a step in the right direction, the concept of levels still leaves the infrastructure in charge of a metric ultimately to be decided upon by vehicles. The approach therefore needs to be changed to an information layer, providing vehicles with the information about all available data, services and measures taken by or made available from infrastructure to support higher levels of automation, leaving the final decision about the chosen level of automation to the vehicle, which is ultimately the only entity that can oversee its own ODD.

Based on this it would be beneficial that information about the availability of infrastructure support services would be provided to vehicles (ADS) in real-time so to make them aware of the infrastructure support that may avoid an ODD-exit and a consequent Minimum Risk Manoeuvre or Transition of Control (see also TR 17828 [i.10], clause 4.4). This information represents meta-information, i.e. information about the availability of information, and not the information itself which may be provided by other ITS Messages. The information layer itself will need to transport many diverse types of information, from different forms of digital C-ITS or ITS services, to the various physical measures and marking taken or present on the road network.

5.2.11.2 Possible ITS architecture and ITS-S services

This use application considers only the road infrastructure cooperation with vehicles:

- I2V Cooperation.

Possible ITS-S Services:

- I2V IVIM (extension).

5.2.11.3 Possible implementation scenarios

Scenario 1: I2V Cooperation:

Infrastructure RSUs send IVIM regarding the availability of infrastructure support information for automated driving systems, a matrix of available digital services and physical measures.

The vehicle uses both the information about the available infrastructure support measures as well as the data sources behind this information to decide on its level of automation within its own ODD.

5.3 CCAM augmented perception

5.3.1 ITS service introduction

As identified in clause 4.4.6, non-connected mobile objects such as vehicles and Vulnerable Road Users (VRUs) will cohabit with partially and fully automated vehicles for a long time. Non-connected mobile objects can only be perceived by the autonomous perception system of other vehicles and VRUs which have well-known limitations relatively to their perception capabilities (distance, coverage, etc.) and the environmental context in which they are moving (traffic density, particular road topographies, meteorological conditions, etc.).

One way to augment the autonomous perception of non-connected dynamic objects is the Collaborative Perception Service (CPS) which provides information related to perceived non-connected dynamic objects. This concept is based on the dissemination of information, from enabled cooperative vehicles/RSUs, collected by their autonomous perception systems related to non-connected dynamic objects.

In some special cases, the DENS and VBS can also be used to signal the presence of non-connected mobile objects.

5.3.2 Perception of a non-connected vehicle at an intersection use case

5.3.2.1 High level description

The Release 2 cooperative vehicle No. 1 is approaching an intersection without having the capability to perceive the arrival of non-connected vehicle(s) on its right before engaging on the intersection. The main ITS Service category is then the "user road safety" which can be achieved by increasing the perception capabilities of the Release 2 cooperative vehicle No. 1 using CCAM Augmented Perception ITS Service.

NOTE: The RSU may also notify that there are no vehicle approaching and then that the subject vehicle may going-on without safety risk.

Figure 17 shows a situation illustrating the perception of a non-connected vehicle at an intersection use case.

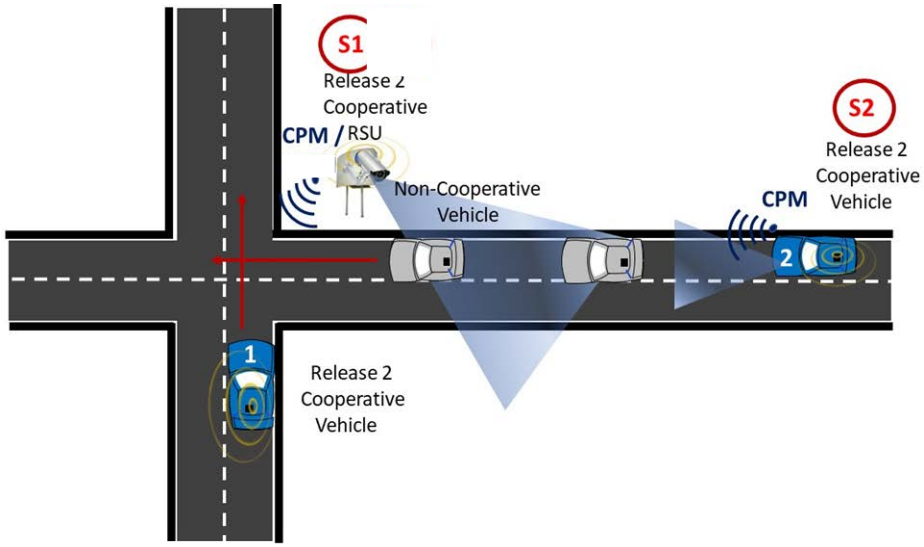


Figure 17: CCAM Augmented Perception at an intersection, use case illustration

5.3.2.2 Possible ITS architecture and ITS-S services

The two following ITS architectures seem to be the most appropriate ones for this use case:

- V2V Cooperation.
- I2V Cooperation.

Possible ITS-S Services:

- CPS provided by the vehicle 2 broadcasting CPMs.
- CPS provided by the RSU broadcasting CPMs.

5.3.2.3 Possible implementation scenarios

Scenario 1: RSU broadcasts CPMs:

Cooperative RSU perceives the 2 non-connected vehicles ahead of cooperative vehicle No. 2 and signals them by broadcasting CPMs.

Cooperative blue vehicle No. 1 receives the CPMs broadcasted by cooperative RSU and then acts according to its new augmented perception (slowing down) to give priority to the right.

Scenario 2: Vehicle 2 broadcasts CPMs:

Cooperative blue vehicle No. 2 perceives 2 non-connected vehicles ahead of it. It signals their presence by broadcasting CPMs.

Cooperative blue vehicle No. 1 receives the CPMs broadcasted by cooperative vehicle No. 2 and then acts according to its new augmented perception (slowing down) to give priority to the right.

5.3.2.4 Implementation scenario flow diagram

The flow diagram Model 4, in Figure 11 is applicable to this use case.

5.3.2.5 Possible implementation scenarios options

In case of the third implementation scenario (S3), the Agreement Seeking concept is used by the RSU which provides a MC Offer to both cooperative vehicles. Once accepted, the RSU leaves the two non-connected vehicles crossing the intersection and then asks the cooperative vehicle No. 2 to Release its right of way to cooperative vehicle No. 1 which may safely cross the intersection.

5.3.3 Perception of a non-connected stationary vehicle at the high of a slop use case

5.3.3.1 High level description

The Release 1 or 2 cooperative vehicle (blue one) is approaching the top of a slop without having the capability to perceive the traffic situation on the other side of the slop (when the road goes down). The main ITS Service category is then the "user road safety" which can be achieved by increasing the perception capabilities of the Release 1 or 2 cooperative vehicle using CCAM Augmented Perception ITS Service.

Figure 18 shows a situation illustrating the perception of a non-connected stationary vehicle at the high of a top use case.

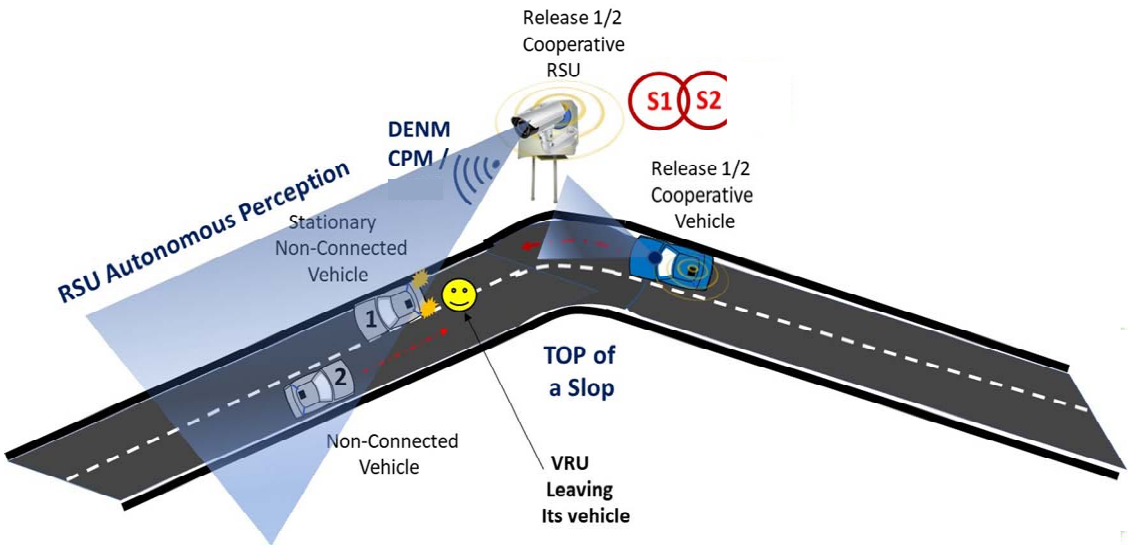


Figure 18: CCAM Augmented Perception at the top of a slop, use case illustration

5.3.3.2 Possible ITS architecture and ITS-S services

The following ITS architecture seems to be the most appropriate one for this use case:

- I2V Cooperation.

Possible ITS-S Services:

- DEN S provided by the RSU broadcasting DENMs for Release 1 cooperative vehicles.
- CPS provided by the RSU broadcasting CPMs for Release 2 cooperative vehicles.

5.3.3.3 Possible implementation scenarios

Scenario 1: RSU broadcasts DENMs to Release 1 cooperative vehicles:

RSU broadcasts DENMs (stationary vehicle, VRUs on the road) when perceived by its autonomous perception system (camera).

Release 1 cooperative vehicle(s) receive DENMs and slows down to avoid a collision with the stationary vehicle and VRU.

Scenario 2: RSU broadcasts CPMs:

RSU broadcasts CPMs signalling the presence of a stationary non-connected vehicle, and of a VRU on the road and the arrival of another non-connected vehicle in the opposite lane.

Release 2 cooperative vehicle upon reception of CPMs slows down and stops behind the stationary vehicle waiting non-connected vehicle 2 to pass before overtaking the stationary vehicle.

5.3.3.4 Implementation scenario flow diagram

The following flow diagram (Figure 19) illustrates described ITS implementation scenarios.

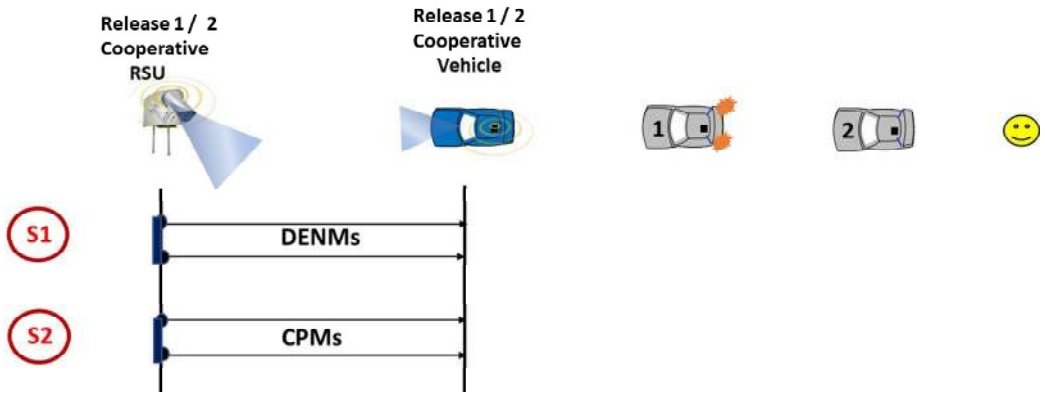


Figure 19: Flow diagram Model 7 using DENMs broadcasting, or CPMs broadcasting

5.3.3.5 Void

5.3.4 Advanced non-connected slow vehicle warning use case

5.3.4.1 High level description

The Release 2 cooperative vehicle cannot perceive neither the approaching non-connected slow vehicle nor the non-connected moving one in the opposite direction. The main service category is then the "user road safety" avoiding a collision of the cooperative vehicle with one of the two non-connected vehicles. This can be achieved by increasing the perception of the cooperative vehicle via the CPS.

Figure 20 shows a situation illustrating the Advanced non-connected slow vehicle warning use case.

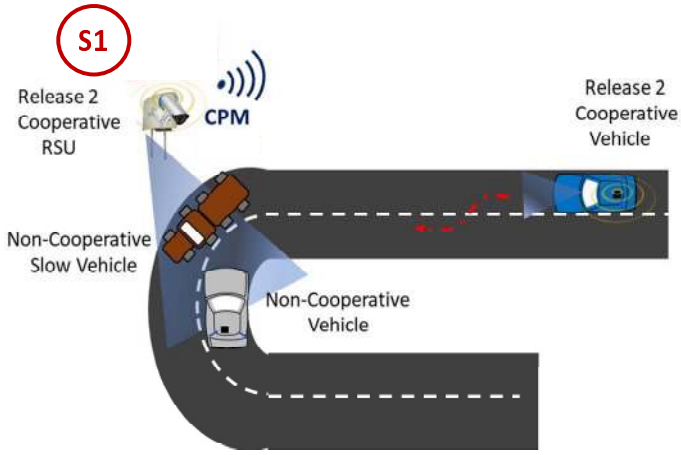


Figure 20: CCAM Augmented Perception of a slow vehicle

5.3.4.2 Possible ITS architecture and ITS-S services

The following ITS architecture seems to be the most appropriate one for this use case:

- I2V cooperation.

Possible ITS-S Services:

- CPS provided by the RSU broadcasting CPMs for Release 2 cooperative vehicles.

5.3.4.3 Possible implementation scenarios

Scenario 1: RSU broadcasts CPMs:

RSU broadcasts CPMs signalling the perception of two non-connected vehicles including a slow vehicle.

Release 2 cooperative vehicle receives the broadcasted CPMs and slows down waiting behind the slow vehicle to achieve its overtaking in safe conditions.

5.3.4.4 Implementation scenario flow diagram

The flow diagram Model 4, in Figure 11 is applicable to this use case.

5.3.4.5 Void

5.3.5 V2V/I2V non-connected VRU perception use case

5.3.5.1 High level description

The Subject Vehicle (SV) cannot perceive the Vulnerable Road User which starts crossing the road. The main service category is "user road safety". This is achieved by augmenting the SV perception using CPS. The augmented perception can be achieved by both the Target Vehicle (TV) or the RSU. The manoeuvre coordination can only be achieved by the RSU.

Figure 21 shows a situation illustrating the V2V /I2V non-connected VRU perception use case.

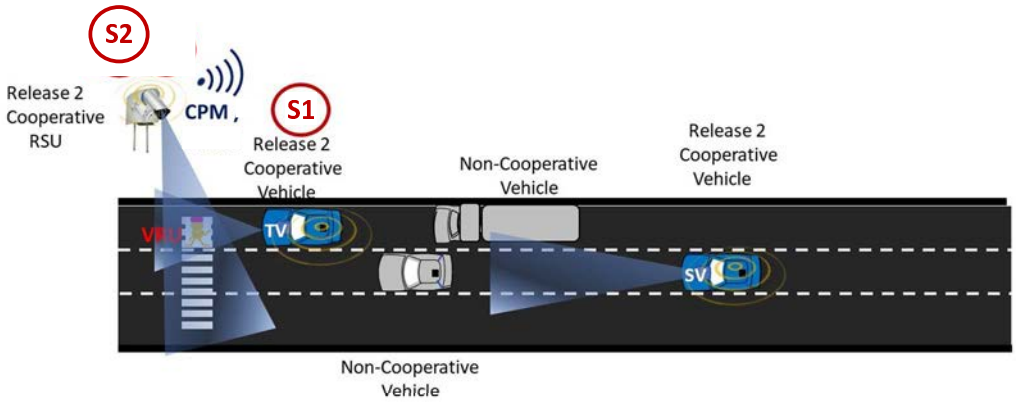


Figure 21: CCAM Augmented Perception of a non-connected VRU

5.3.5.2 Possible ITS architecture and ITS-S services

The two following ITS architectures seem to be the most appropriate ones for this use case:

- V2V Cooperation.
- I2V Cooperation.

Possible ITS-S Services:

- CPS provided by the vehicle TV broadcasting CPMs.
- CPS provided by the RSU broadcasting CPMs.

5.3.5.3 Possible implementation scenarios

Scenario 1: Target Release 2 cooperative vehicle (TV) broadcasts CPMs:

TV cooperative vehicle detects the VRU crossing the road with its front camera and then broadcasts CPMs signalling its presence on the pedestrian crossing.

SV cooperative vehicle receives the broadcasted CPMs and slows down to stop at the pedestrian crossing level as long as the VRU has not reached the opposite side of the road.

Scenario 2: RSU broadcasts CPMs:

Cooperative RSU perceived the VRU crossing the road and then broadcasts CPMs signalling him.

SV cooperative vehicle receives the broadcasted CPMs from the RSU and then slows down and stops if necessary to avoid a collision with the VRU.

5.3.5.4 Implementation scenario flow diagram

The flow diagram Model 4, in Figure 11 is applicable to this use case.

5.3.5.5 Void

5.3.6 Perception into a tunnel use case

5.3.6.1 High level description

An automated vehicle is approaching a tunnel entry without having the capability to adequately perceive all other road users beyond the tunnel entry (due to sensor degradation). The main ITS Service category is then the "user road safety" which can be achieved by increasing the perception capabilities of the approaching automated vehicle using CCAM Augmented Perception ITS Service.

5.3.6.2 Possible ITS architecture and ITS-S services

The two following ITS architectures seem to be the most appropriate ones for this use case:

- V2V Cooperation.
- I2V Cooperation.

Possible ITS-S Services:

- CPS provided by the RSU broadcasting CPMs.
- CPS provided by a cooperative vehicle within the tunnel broadcasting CPMs.

5.3.6.3 Possible implementation scenarios

Scenario 1: RSU broadcasts CPMs:

Cooperative RSU perceives all vehicles at the tunnel entry and signals them by broadcasting CPMs.

Approaching cooperative vehicle receives the CPMs broadcasted by cooperative RSU and then acts according to its new augmented perception to safely enter the tunnel.

Scenario 2: Vehicle within the tunnel broadcasts CPMs:

Cooperative vehicle within the tunnel perceives non-connected (or not-cooperative) vehicles in its vicinity. It signals their presence by broadcasting CPMs.

Approaching cooperative vehicle receives the CPMs broadcasted by cooperative vehicle within the tunnel and then acts according to its new augmented perception to safely enter the tunnel.

5.3.6.4 Implementation scenario flow diagram

The flow diagram Model 4, in Figure 11 is applicable to this use case.

5.3.6.5 Possible implementation scenarios options

The receiving vehicle acts according to its new augmented perception to safely enter the tunnel and/or slows down or stops according to the traffic situation.

5.3.7 Perception of traffic when merging use case

5.3.7.1 High level description

An automated vehicle is approaching a road merge without having the capability to adequately perceive all other road users approaching on the main road (due to occlusion). The main ITS Service category is then the "user road safety" which can be achieved by increasing the perception capabilities of the approaching automated vehicle using CCAM Augmented Perception ITS Service.

Figure 22 shows a situation illustrating the perception - merging use case.

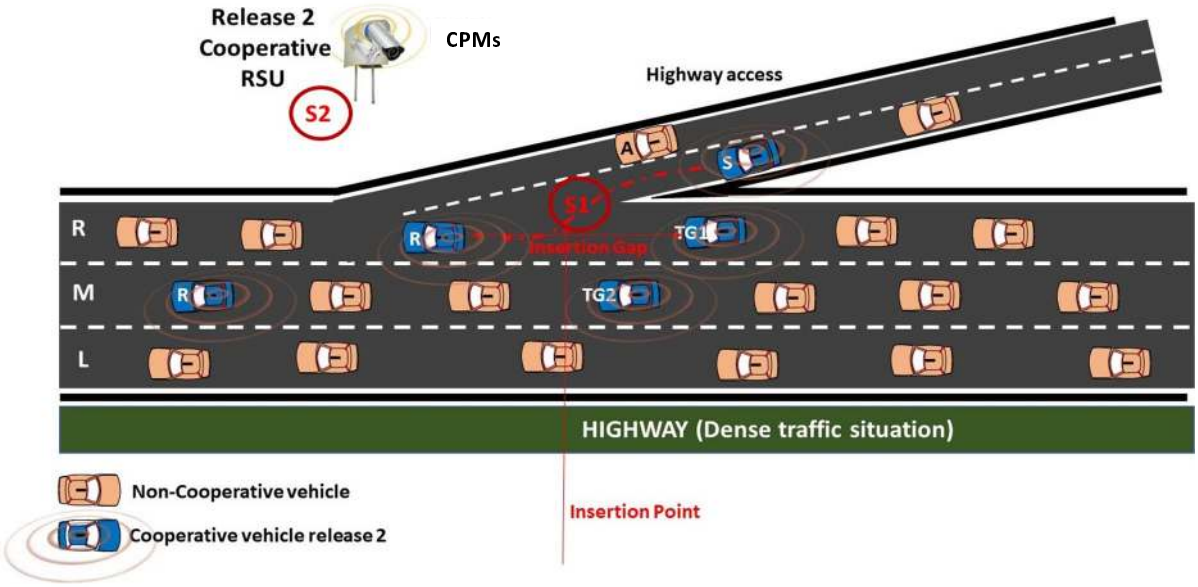


Figure 22: Merging use case illustration

5.3.7.2 Possible ITS architecture and ITS-S services

The two following ITS architectures seem to be the most appropriate ones for this use case:

- V2V Cooperation.
- I2V Cooperation.

Possible ITS-S Services:

- CPS provided by the RSU broadcasting CPMs.
- CPS provided by a cooperative vehicle approaching on the main road broadcasting CPMs.

5.3.7.3 Possible implementation scenarios

Scenario 1: Vehicle approaching the road merge broadcasts CPMs:

Cooperative vehicle approaching the road merge on the main road perceives non-connected vehicles in its vicinity. It signals their presence by broadcasting CPMs.

Merging cooperative vehicle receives the CPMs broadcasted by cooperative vehicle approaching the road merge on the main road and then acts according to its new augmented perception to safely merge onto the main road.

Scenario 2: RSU broadcasts CPMs:

Cooperative RSU perceives all vehicles at the road merge and signals them by broadcasting CPMs.

Merging cooperative vehicle receives the CPMs broadcasted by cooperative RSU and then acts according to its new augmented perception to safely merge onto the main road.

5.3.7.4 Implementation scenario flow diagram

The flow diagram Model 4, in Figure 11 is applicable to this use case.

5.3.7.5 Possible implementation scenarios options

The receiving vehicle acts according to its new augmented perception to safely merge and/or slows down or stops according to the traffic situation.

5.4 Vehicles' coordination

5.4.1 ITS service introduction

Under this ITS service fall ITS applications that use ITS-S services to coordinate vehicle movements in terms of manoeuvres or trajectories. As the capability to plan possible future manoeuvres and trajectories is a prerogative of vehicles with higher automation levels (L3+), this ITS service is targeted at those vehicles. Several forms of coordination with different complexity are possible. For example, messages can be exchanged to allow vehicles follow, at a safe distance, the trajectory of other vehicles in front (follow-me). Alternatively, vehicles can exchange messages to notify the intention to implement specific manoeuvre, enable cooperative manoeuvre as well as to acknowledge whether manoeuvre intentions of other vehicles can be safely implemented. Coordination can run between vehicles or with the support of the road infrastructure or a central supervision system. In this last case, roadside or central ITS-Ss might suggest vehicles to implement specific manoeuvres that in turn vehicles could decide to accept or not based for example on own safety constraints in the current driving environment. The manoeuvre suggestions could be common to several vehicles or specifically addressed to individual vehicles. In any case, the expected impact of this ITS Service is to increase traffic safety and efficiency at the same time thanks to an explicit coordination of actions between cooperative highly automated vehicles. Knowing about each other "plans" would allow receiving vehicles to know in advance how to react (e.g. safely slows down when a vehicle ahead notifies the intention to merge on the ego-lane), but also to keep less conservative time gaps from the surrounding cooperative vehicles.

5.4.2 Void

Figure 23: Void

5.4.3 Void

Figure 24: Void

5.4.4 Advanced Cooperative ACC (String) (AC-ACC S) use case

5.4.4.1 High level description

This use case is based on the use of V2X to obtain lead vehicle dynamics and general traffic ahead to enhance the performances of ACC and ACC string as defined in clause 5.2.4. Compared to the normal C-ACC it includes support for lateral vehicle control in addition to longitudinal one. Therefore, it will require usage of safety containers guaranteeing higher information quality. In case of a string of ACC vehicles, the control of the string is decentralized and differently from Platooning does not require a dedicated platoon control message. The infrastructure can play a similar role as for C-ACC and C-ACC-S using IVIM extensions. In this case IVIMs can additionally suggest lane changes. As this use case might be run by vehicles with high automation level, IVIMs are expected to be as well complemented by safety containers (for functional safety reasons).

5.4.4.2 Possible ITS architecture and ITS-S services

The two following ITS architectures seem to be the most appropriate ones for this use case:

- V2V Cooperation.
- I2V Cooperation.

Possible ITS-S Services:

- V2V CAS including safety containers.
- I2V IVI including safety containers.

5.4.4.3 Possible implementation scenarios

Scenario 1: V2V using CAMs with safety containers:

One possible implementation scenario is to use V2V communication only. At least one vehicle B follows a lead vehicle A. Vehicle B actuates both its longitudinal and lateral control based on the information received from vehicle A's dynamics via CAMs and/or CPMs.

Scenario 2: I2V using IVIMs with safety containers:

A second implementation scenario is the additional inclusion of I2V communication. In this scenario, the actuation of longitudinal and lateral control of both the leading and following vehicle takes information and recommendations received through IVIM by the infrastructure into account.

5.4.4.4 Possible implementation scenarios options

Both scenarios require the addition of safety containers in CAMs/IVIMs.

5.4.5 Truck platooning management use case

5.4.5.1 High level description

Platooning and Cooperative Adaptive Cruise Control (C-ACC) are enabled by adding wireless communication to already automated functionalities such as longitudinal and lateral control of the vehicle. Vehicles' string including platooning encompasses both lateral as well as longitudinal control of the vehicle, whereas C-ACC usually addresses only longitudinal (brake and acceleration).

At the level of longitudinal control, Cooperative - Active Cruise Control (C-ACC) development has enabled the possibility to reduce the minimum inter-distance between vehicles to a few meters (6 to 10 meters). Such function enables the building of truck platoons (a maximum of 4 vehicles seems acceptable) which are moving in synchronization. The small gap of 6 to 10 meters between them does not allow an easy safe insertion of another vehicle. Consequently, in some situation, a platoon may need to be broken (e.g. before reaching a motorway exit in dense traffic situation) to leave other vehicles to change of lane and leave the motorway. Some other situations may also need the support of the road infrastructure, for example when two motorways are joining, for maintaining as far as possible an existing platoon.

5.4.5.2 Possible ITS architecture and ITS-S services

The two following ITS architectures seem to be the most appropriate ones for this use case:

- V2V Cooperation.
- I2V Cooperation.

Possible ITS-S Services:

- I2V IVI Service.

5.4.5.3 Possible implementation scenarios

Scenario 1: I2V using IVIMs:

The IVIM standard includes already a container dedicated to platooning rules. Consequently, a consistent approach with this standard is needed.

5.4.6 Toll Plaza Guidance use case

5.4.6.1 High level description

For partly and fully automated vehicles, toll plazas are obstacles on the road where additional information directly sent from infrastructure can assist them to safely pass through. Example for this information contains:

- Available lanes per direction including certain restriction i.e. for buses or trucks.
- Payment methods per lane (i.e. free flow for automated vehicles).
- Lane utilization so vehicles can choose the quickest path.
- Relevance areas in advance to the toll plaza if partly automated vehicles need to hand over control to the driver.
- Status of gates, barriers, or traffic lights to drive through the toll plaza.

With the information, automated vehicles can choose the correct lanes and drive through the toll plaza without assistance of the driver or passenger.

5.4.6.2 Possible ITS architecture and ITS-S services

The following ITS architecture seems to be the most appropriate one for this use case:

- I2V Cooperation.

Possible ITS-S Services:

- I2V IVI, MAPEM, SPAT Service.

5.4.6.3 Possible implementation scenarios

Scenario 1: I2V using IVI, SPAT and MAPEM:

Using the IVI, SPAT and MAPEM, the necessary information (GNSS-Information, lane status and utilization, payment methods, traffic light status, etc.) will be transmitted.

5.4.7 Void

Figure 25: Void

5.5 Multi-Car Collision avoidance

5.5.1 ITS service introduction

The collision avoidance (crash avoidance) service is constituted of a functional ITS applications pipeline which is illustrated in Figure 26.

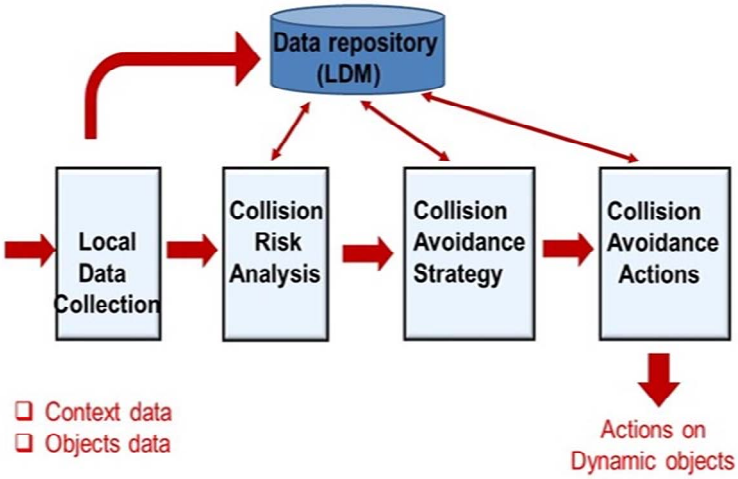


Figure 26: Functional pipeline illustrating the collision avoidance ITS service

With the navigation ITS service it is one essential generic ITS service which is mandatory at the level of vehicles moving in a partial or full automated mode. Mixed traffic situations mixing-up human driven vehicles with partly and fully automated vehicles constitute a huge challenge to the collision avoidance application.

Collision avoidance use cases are added in the present document. They are far from being exhaustive as many different collision risk situations may be observed.

A Multi-Car collision implies that at least two vehicles are involved in the collision, however, in many cases more than two vehicles can be involved.

Artificial Intelligence (AI) can be used at the level of the collision risk analysis function. However, the quantity of data to be locally collected is considerable and includes the contextual data (traffic situation, road topography, horizontal marking and vertical signalling, weather conditions, human behaviours, etc.). The complexity and diversity of situations will require an intensive use of simulations (machine learning) to develop and validate efficient algorithms for risk analysis and collision avoidance.

5.5.2 Advanced signal violation warning use case

5.5.2.1 High level description

One not - connected vehicle is violating a traffic light red signal. This can be detected and signalled by the Release 2 Target cooperative Vehicle (TV) and the Release 2 cooperative RSU.

The Release 1 subject cooperative vehicle (green SV2) may only process DENMs while the Release 2 Subject cooperative Vehicle (blue SV1) may also process CPMs.

Figure 27 shows a situation illustrating the advanced signal violation warning use case.

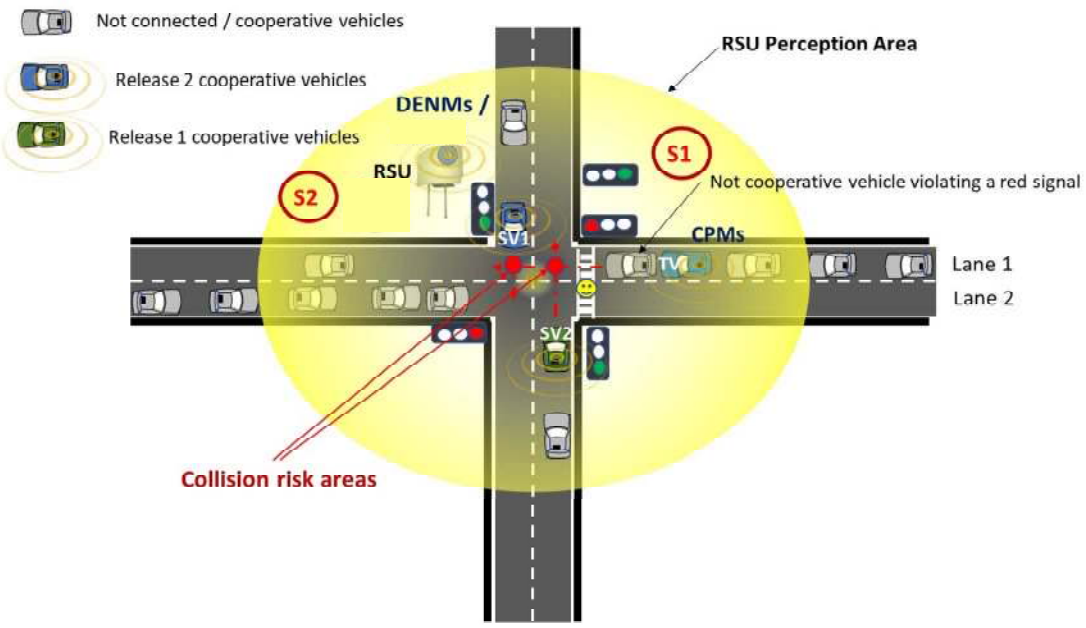


Figure 27: Advanced signal violation use case

5.5.2.2 Possible ITS architecture and ITS-S services

The two following ITS architectures seem to be the be most appropriate ones for this use case:

- V2V Cooperation.
- I2V Cooperation.

Possible ITS-S Services:

- V2V SPAT and CPMs.
- I2V DENMs.

5.5.2.3 Possible implementation scenarios

Scenario 1: V2V using SPAT and CPMs:

In this scenario, the Release 2 cooperative TV vehicle detects the not-connected vehicle and signals it by broadcasting CPMs.

The Release 2 subject cooperative vehicle SV1 receives the CPMs as well as the SPAT & MAP and has then the capability to detect a signal violation by the not-connected vehicle. The SV1 can act to reduce the risk of collision or mitigate its impacts.

Scenario 2: I2V using DENMs:

The RSU detects a risk of signal violation between the not-connected vehicle and the cooperative Subject Vehicles (SV1 and SV2). The RSU broadcasts DENMs (signal violation warning) which are received by both vehicles (Release 1 and Release 2) which can act accordingly to avoid or mitigate the risk of collision.

5.5.2.4 Implementation scenario flow diagram

The following flow diagram (Figure 28) illustrates described ITS implementation scenarios.

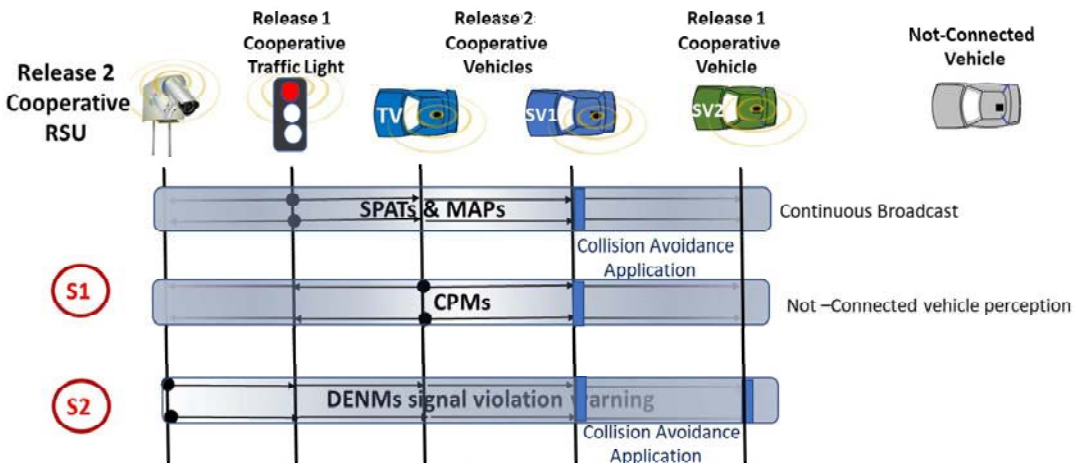


Figure 28: Flow diagram, Model 9 combining SPAT/MAP, CPMs, DENMs

5.5.2.5 Possible implementation scenarios options

Scenario 1: Only Release 2 cooperative vehicles can benefit of the CPS. The Release 1 Subject cooperative Vehicle (SV2) cannot decode the CPMs.

Scenario 2: Both Release 1 and Release 2 cooperative subject vehicles can decode and use the received DENMs to avoid or mitigate collision.

5.5.3 Advanced wrong way driving warning use case

5.5.3.1 High level description

The Release 2 cooperative Target Vehicle (TV) is engaging in a wrong way (countersense of the highway exit). In such situation, it is urgent to act to avoid the TV vehicle to continue its wrong trajectory. The Release 2 cooperative RSU is perceiving this situation and then signals it to Release 1 (SV2) and Release 2 (SV1) cooperative vehicles trying to prevent collisions.

The urgency is required to avoid that the wrong way driven vehicle may enter the highway, so increasing the risk of frontal collision with vehicles moving on the highway.

Figure 29 shows a situation illustrating the advanced wrong way driving use case.

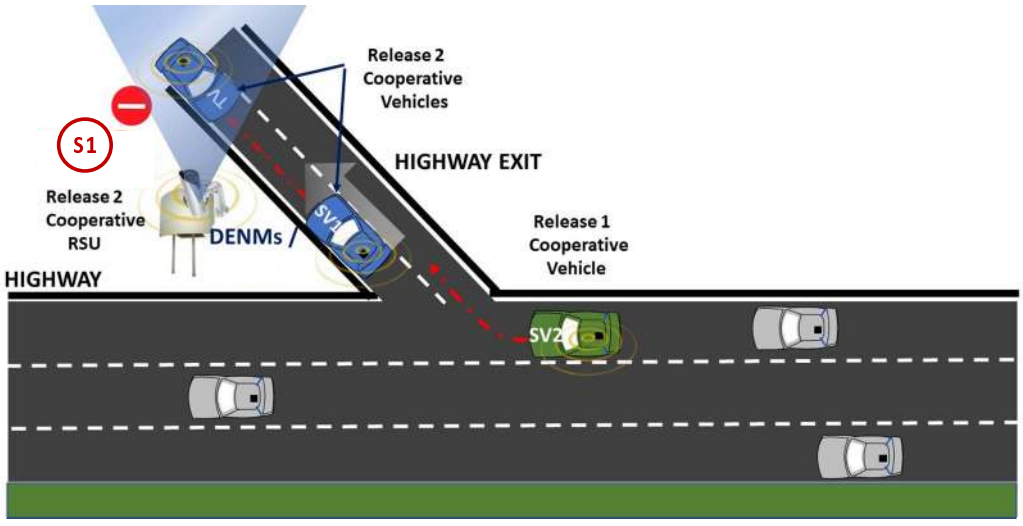


Figure 29: Advanced wrong way driving use case

5.5.3.2 Possible ITS architecture and ITS-S services

The following ITS architecture seems to be the most appropriate one for this use case:

- I2V Cooperation.

Possible ITS-S Services:

- I2V DENMs.

5.5.3.3 Possible implementation scenarios

Scenario 1: I2V using DENMs:

The Release 2 cooperative RSU broadcasts DENMs wrong way driving which are received and decoded by Release 1 and Release 2 vehicles. These vehicles may then act to reduce or mitigate the risk of collision changing their trajectories or/and slowing down.

5.5.3.4 Implementation scenario flow diagram

The flow diagram Model 1, in Figure 3 is applicable to this use case.

5.5.3.5 Possible implementation scenarios options

Scenario 1: DENMs provides only information about risks related to a wrong way driving situation. The correction of this situation and elimination of associated collision risks relies only at the level of each receiving human driven/automated cooperative vehicle.

5.6 Intersection crossing assist

5.6.1 ITS service introduction

Roads' intersections are critical areas in terms of road safety as various types of vehicles are crossing them, often without a total perception. They are also critical areas in terms of traffic management leading to specific traffic regulations and to traffic control using specific means as well to enforce road safety to regulate the local traffic.

5.6.2 Advanced Intersection Collision Warning (AICW) use case

5.6.2.1 High level description

By receiving information about non-cooperative vehicles detected by environmental sensors (CPMs), vehicles can detect the risk of an intersection collision and warn the driver accordingly.

5.6.2.2 Possible ITS architecture and ITS-S services

Architecture A: Cooperative vehicles and road-side infrastructure provide information on objects detected by their sensors through CPM. Receiving vehicles make use of this information in addition to the received CAMs to issue an intersection collision warning if appropriate.

5.6.2.3 Possible implementation scenarios options

Implementation A: This implementation option refers to Architecture A. In addition to the dynamics information in CAMs, vehicles can make use of object information received from other vehicles or infrastructure to activate the intersection collision warning. Thus, also warnings about collision risks with non-cooperative vehicles can be issued and thus safety is fostered even more.

5.6.3 Void

Figure 30: Void

5.6.4 Traffic light-controlled intersection - Priority vehicles management use case

5.6.4.1 High level description

An active emergency vehicle is approaching at an intersection which is controlled by traffic lights. The subject traffic light is red; however two different traffic scenarios are possible to facilitate the urgent crossing of the emergency vehicle (TV):

- The Subject Traffic Light (STL) transits to green, all others traffic lights transiting or remaining reds. But in this case, this can only be achieved once the crossing VRU has left the pedestrian crossing.
- The emergency vehicle (TV) gets the right of way and then violates the STL red state. But in this case, all vehicles which have the right of way given by a green light have to perceive the arrival of the emergency vehicle and then release it their right of way.

Figure 31 shows a situation illustrating the traffic light-controlled intersection - priority vehicles management use case.

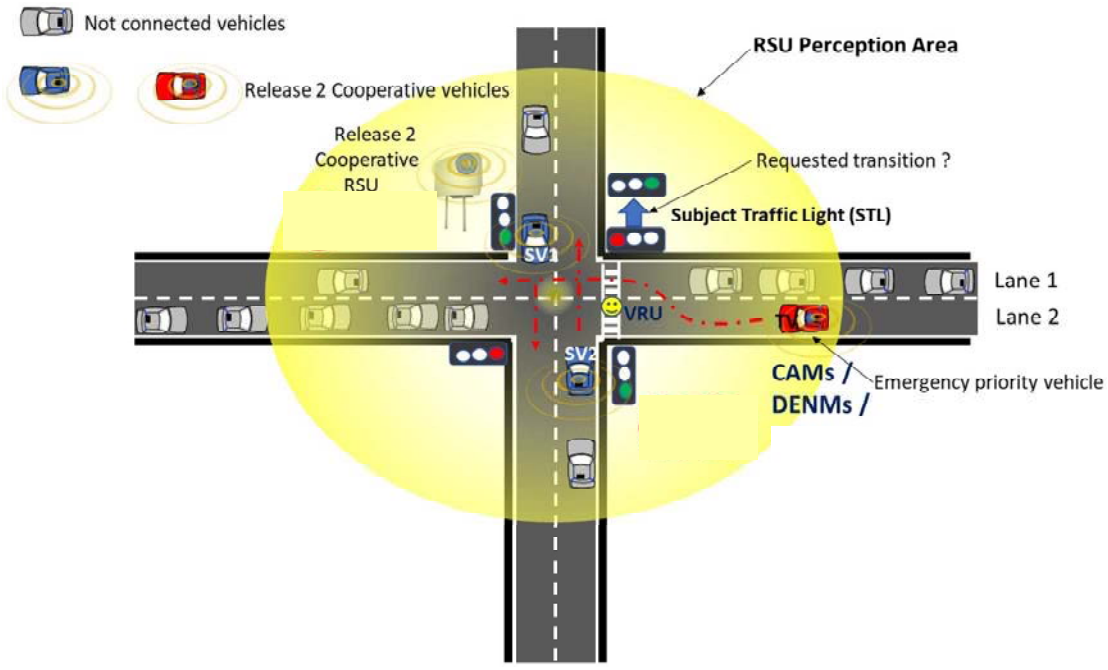


Figure 31: Traffic light-controlled intersection - priority vehicle management use case

5.6.4.2 Possible ITS architecture and ITS-S services

The two following ITS architectures seem to be the most appropriate ones for this use case:

- V2V Cooperation.
- I2V Cooperation.

Possible ITS-S Services:

- CAS.
- DENS.

5.6.4.3 Possible implementation scenarios

Scenario 1: V2V using CAMs or/DENMs:

The active emergency vehicle (TV) broadcasts CAMs including the emergency container which indicates that the emergency vehicle is in operation and then got traffic privileges. This could be reinforced by the broadcasting of DENMs indicating an emergency vehicle in approach.

Either the STL remains red, and the emergency vehicle violates the red signal taking care of the crossing VRU, or the STL is switched to green.

Subject vehicles which had the right of way given by a green traffic light have to perceive the arrival of the emergency vehicle and then release their right of way.

5.6.4.4 Implementation scenario flow diagram

The following flow diagram (Figure 32) illustrates described ITS implementation scenarios.

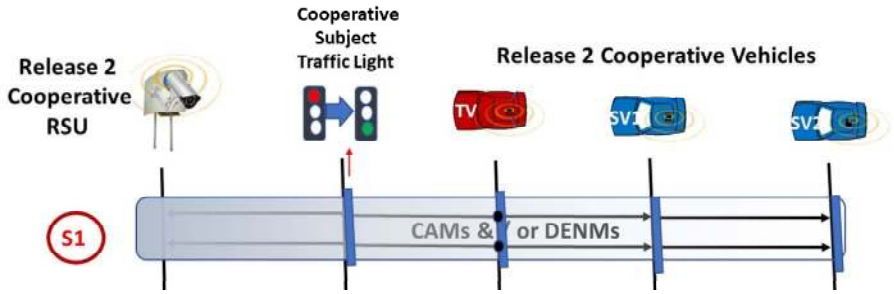


Figure 32: Flow diagram, Model 10 combining CAMs broadcasting, DENMs broadcasting

5.6.4.5 Possible implementation scenarios options

Scenario 1: CAMs or/and DENMs can be used by receiving ITS-S Release 1 or Release 2 to act to provide the right of way to emergency vehicle.

Cooperative subject traffic light may decide to switch green or stay red.

5.6.5 Optimized traffic light information from V2I use case

5.6.5.1 High level description

In proximity of signalized intersections, cooperative automated vehicle ITS-Ss (isolated or organized in strings (platoons or C-ACC)) continuously transmit information describing their status (e.g. the occurrence of a hazardous event), intentions (e.g. planned route for transiting intersection), targets (e.g. desired speeds), or characteristics (e.g. string size, current automation level, etc.). By collecting this explicit probing V2I information, the intersection control system (e.g. the traffic light controller) can run an ITS-S application to improve the safety and efficiency of the intersection. Depending on the applied strategy, the intersection control system will dynamically adapt the information transmitted to the vehicles in terms of SPATEMs and MAPEMs and possibly generate advice that vehicles can automatically apply at their ITS-S applications to transit the intersection while meeting the intersection control system's goals.

Figure 33 shows a situation illustrating the optimized traffic light information from V2I use case.

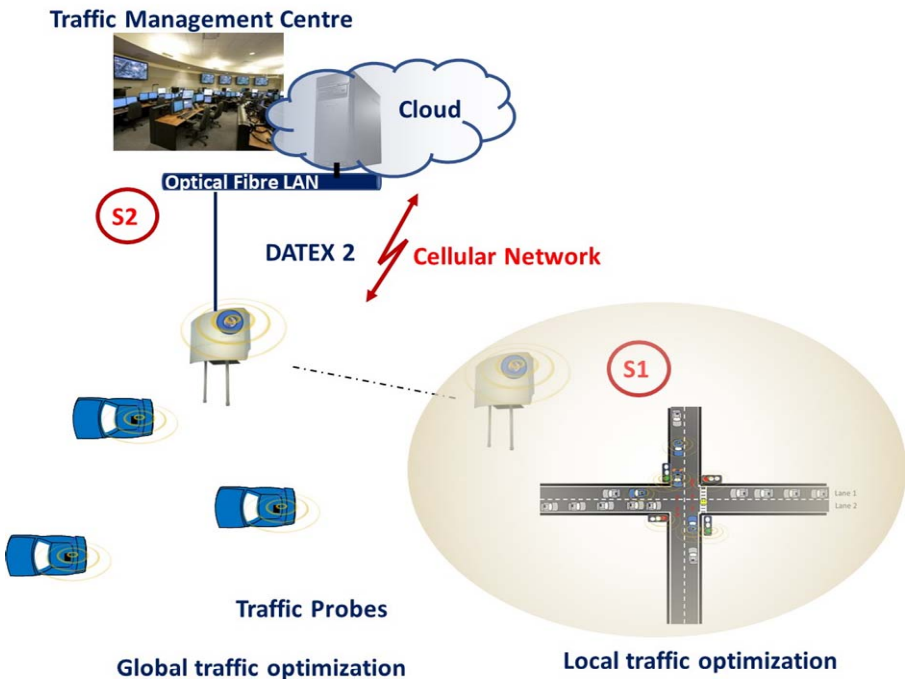


Figure 33: Collect of probe data for traffic optimization use case

5.6.5.2 Possible ITS architecture and ITS-S services

The two following ITS architectures seem to be the most appropriate ones for this use case:

- I2V Cooperation.
- C2V Cooperation.

Possible ITS-S Services:

- Any ITS-S service enabling to collect information (probe vehicles' data), and accordingly advices.

5.6.5.3 Possible implementation scenarios

Scenario 1: I2V Local Traffic Optimization:

The first ITS-S scenario refers to an I2V local traffic optimization. Vehicles affected by a hazard (e.g. broken down situation) on a specific inbound or outbound lane run an ITS-S application detecting the problem and broadcasting a DENM containing an identifier of the lane where the hazard occurs. This detailed information is used by the ITS-S application of the intersection control system to dynamically update the allowed topological in/out connections and the associated sign and time information. The updated information is then reflected in the MAPEM and SPATEM information transmitted by the associated Roadside ITS-S.

Scenario 2: I2V-C2V Global Traffic Optimization:

The second ITS-S scenario refers to an extension of the Scenario 1 to any type of global road topography (not only intersections) covering a complete traffic area. In such case, cooperative vehicles and cooperative RSUs act as traffic probes and transmit pre-processed data using DATEX II protocols to a traffic management centre which can then return, using also DATEX II advice to vehicles to optimize globally the traffic.

5.6.5.4 Implementation scenario flow diagram

The following flow diagram (Figure 34) illustrates described ITS implementation scenarios.

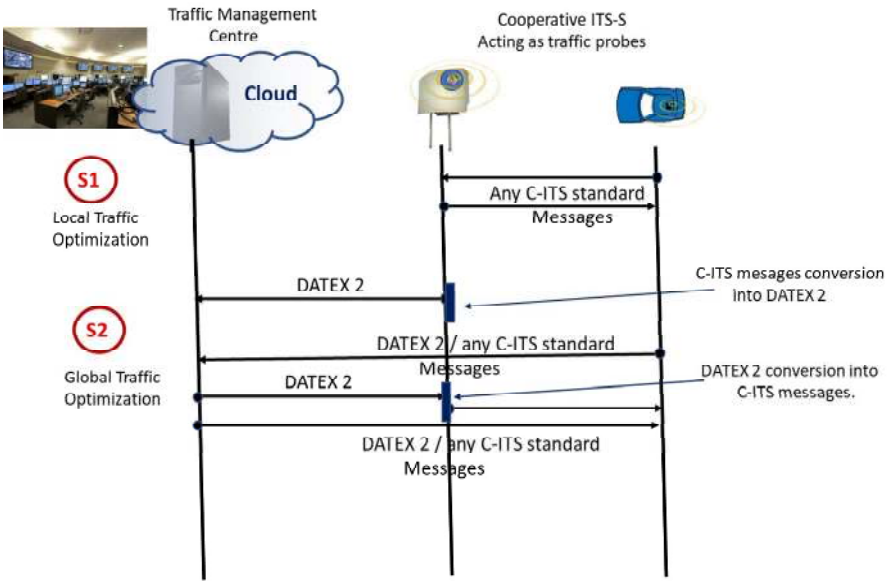


Figure 34: Flow diagram, Model 11, combining any C-ITS standard messages broadcasting into DATEX unicast

5.6.5.5 Possible implementation scenarios options

Scenario 1: The local RSU manages locally the traffic according to its augmented perception (autonomous + standard received C-ITS messages).

Scenario 2: The global traffic relative to a delimited area (e.g. region) is managed by a traffic management centre via an optical fibre LAN or a cellular network. The local RSUs may support the central system collecting data (traffic probe function) and converting them in DATEX II before providing them to the centre. The local RSU may also convert DATEX II advice received from the centre into standard C-ITS messages (e.g. CAMs, DENMs, etc.).

5.6.6 Automated GLOSA (A-GLOSA) use case

5.6.6.1 High level description

The probe I2V information can be included in CAM extensions of different types and be broadcasted by vehicles of different automation levels depending on their capability to generate that information (e.g. in/out route at intersections might be available thanks to navigation systems also at vehicles with lower automation, while information about possible participation in a vehicle string might be only available at vehicles with higher automation). As for the previous one, this implementation option implies dynamic modifications of consolidated intersection control programs by inclusion of external information received by vehicles via V2X. Therefore, it is necessary that future CAM extensions are complemented by safety containers expressing the quality and accuracy of the transmitted information (for functional safety reasons). Regarding the messages generated by the infrastructure, SPATEM and MAPEM messages would also require extensions for safety containers expressing the quality and accuracy of the provided topological, timing and speed advice information (this is again for functional safety reasons at the automated systems of receiving vehicles).

5.6.6.2 Possible ITS architecture and ITS-S services

The two following ITS architectures seem to be the appropriate ones for this use case:

- V2V Cooperation.
- I2V Cooperation.

Possible ITS-S Services:

- IS.

5.6.6.3 Possible implementation scenarios

Scenario 1: I2V/V2V Local Traffic Optimization:

The augmented perception of the RSU can be used to optimize locally the traffic using IS.

5.6.6.4 Possible implementation scenarios options

Standard CAMs as well as SPATM and MAPEM require the addition of a safety container expressing the quality and accuracy of provided topological, timing and speed information.

5.6.7 Automated GLOSA with negotiation use case

5.6.7.1 High level description

This ITS application extends the approaches of the previously described A-GLOSA and Optimized Traffic light information with V2I. It is targeted to cooperative vehicles with high level of automation being capable to negotiate about the received speed or lane change advice with the intersection control system. Cooperative automated vehicles inform the controller in real time if the received advice is being followed or not. This additional feedback can be used by the ITS-S application at the intersection controller to further refine the traffic light phase and time algorithms and produce refined or alternative advice, such as to further optimize the traffic flow at the intersection or at intersection corridors.

5.6.7.2 Possible ITS architecture and ITS-S services

The two following ITS architectures seem to be the most appropriate ones for this use case:

- V2V Cooperation.
- I2V Cooperation.

Possible ITS-S Services:

- Any ITS-S service enabling to collect information (probe vehicles' data), and accordingly advices.
- IS.

5.6.7.3 Possible implementation scenarios

Scenario 1: I2V/V2V Local Traffic Optimization:

The augmented perception of the RSU can be used to optimize locally the traffic using IS. Feedback from relevant vehicles enable a real time evolution of the local traffic optimization strategy.

5.6.7.4 Void

5.6.8 Railway level crossing use case

5.6.8.1 High level description

The potential traffic conflicting area is a zone defined between two crossing lights as depicted in Figure 35.

In Europe a railway level crossing can be equipped with different devices:

- Lights, ring, two half barriers (as represented in Figure 35).
- Lights, ring, two full barriers.
- Lights, ring, four half barriers.

- Lights, ring.

A railway level crossing area is a critical area since a train can be signalled at any unpredictable time. This led the main stakeholders to provide constantly information about the current state of the railway level crossing, considering that a state change corresponds to the signalisation of an event.

Then, the following states are possible:

- Nominal: The RLC is open, road users are authorized to cross.
- Abnormal situation: The RLC is presenting a defect and road users are not authorized to cross.
- Closed, signalling the arrival of a train: The RLC is closed, and road users are not authorized to cross.
- Closed, signalling railway work: The RLC is closed, and road users are not authorized to cross.
- Unguarded level crossing: No information about the RLC state. Road users need to be vigilant before crossing.

Figure 35 shows a situation illustrating the railway level crossing use case.

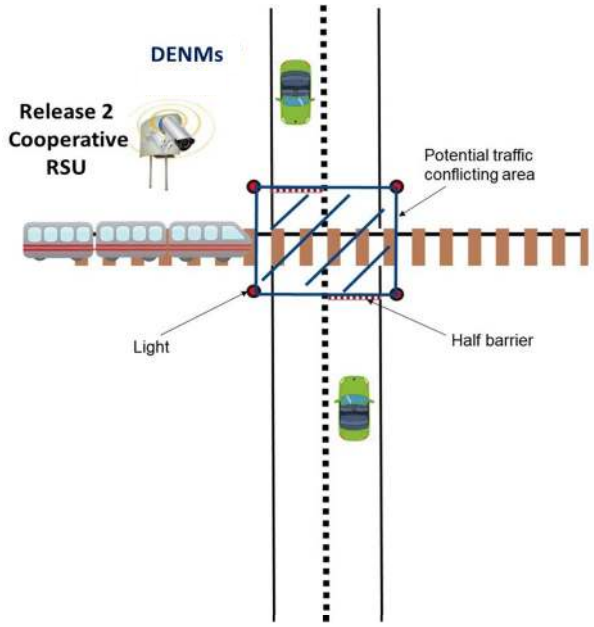


Figure 35: Railway Level Crossing (RLC) use case

5.6.8.2 Possible ITS architecture and ITS-S services

The following ITS architecture seems to be the most appropriate one for this use case:

- I2V Cooperation.

Possible ITS-S Services:

- DEN S.

5.6.8.3 Possible implementation scenarios

Scenario 1: I2V DENMs broadcasting:

DENMs signalling the RLC state are continuously broadcasted with a predefined frequency comprised between 1 Hz and 10 Hz.

Receiving vehicle adapt their movements accordingly.

5.6.8.4 Implementation scenario flow diagram

The following flow diagram (Figure 36) illustrates described ITS implementation scenario.

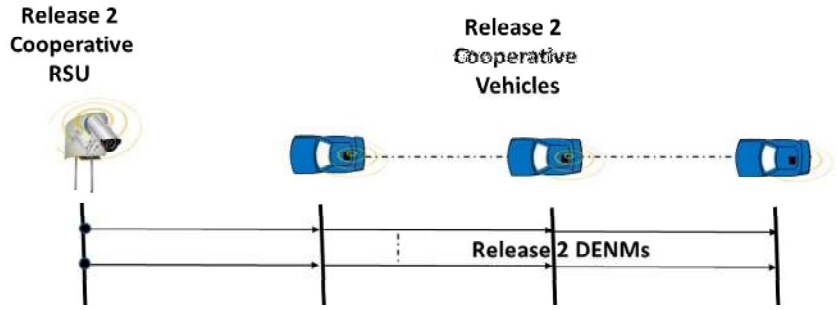


Figure 36: Flow diagram Model 12

5.6.8.5 Possible implementation scenarios options

DENMs provide the state of the RLC and then indicate all changes of state.

5.6.9 Other intersection/area crossing use case

5.6.9.1 High level description

Other types of intersections, crossing areas (e.g. bridges, vertical lift bridges, tunnels, etc.) may be protected as described here above at the level of the Railway Level Crossing.

Others notified constraints such as the vehicle size, the total weight of the vehicle, the maximum number of vehicles simultaneously authorized to cross may also condition the evolution of approaching vehicles.

5.6.9.2 Possible ITS architecture and ITS-S services

The following ITS architecture seems to be the most appropriate one for this use case:

- I2V Cooperation.

Possible ITS-S Services:

- DEN S.

5.6.9.3 Possible implementation scenarios

Scenario 1: I2V DENMs broadcasting:

DENMs signalling the intersection/area crossing state are continuously broadcasted with a predefined frequency comprised between 1 Hz and 10 Hz.

Receiving vehicle adapt their movements accordingly.

5.6.9.4 Implementation scenario flow diagram

The flow diagram Model 12, in Figure 36 is applicable to this use case.

5.6.9.5 Possible implementation scenarios options

DENMs provide the state of the protected area and then indicates all changes of state.

5.7 Advanced warning and information, VRU protection

5.7.1 ITS service introduction

VRUs protection is a key road safety domain which was the object of a set of standards identifying reference use cases, ITS functional architecture and specifying a new VRU awareness basic service intended to avoid collision between VRUs and vehicles.

However, the development and deployment time which are necessary to lead to a full benefit of such ITS application and the constant increase of some categories of VRUs critical accidents (e.g. cyclists, standing scooter drivers, motorcyclists) require to develop some short terms solutions enabling a significant improvement of the VRUs road safety before reaching a large deployment of here above identified solutions.

The Connected Motorcycle Consortium (CMC), member of the C2C-CC identified critical motorcyclists situations requiring an urgent focus to quickly improve their road safety.

5.7.2 Advanced Slow Vehicle Warning (ASVW) use case

5.7.2.1 High level description

Extends the Day1 SVW with information about slow vehicles detected by other vehicles or infrastructure units (CPMs). This is particularly beneficial when the slow vehicle itself is not C-ITS equipped and cannot warn other road users about its presence.

5.7.2.2 Possible ITS architecture and ITS-S services

Architecture A: In addition to the CAMs sent out by slow vehicles, or when the slow-moving vehicle is not C-ITS equipped at all, other vehicles and infrastructure provide object information through CPM which can be used to issue a slow vehicle warning if appropriate.

5.7.2.3 Possible implementation scenarios options

Implementation A: This implementation option refers to Architecture A. In addition to the dynamic's information in CAMs and DENMs, vehicles can make use of object information received from other vehicles or infrastructure to activate the slow vehicle warning functionality. Thus, also warnings about non-cooperative slow vehicles can be issued and thus safety is fostered even more.

5.7.3 Filtering motorcycle use case

5.7.3.1 High level description

A motorcycle and a vehicle exchange message to lower the collision risk when the presence of the motorcycle is not expected by the driver.

A motorcycle is passing a column of stationary traffic. The stationary traffic has deliberately left a gap in the queue to permit a vehicle to exit from a property on the right. The vehicle leaving the property enters the gap and assumes that they only need to look for vehicles approaching from their right, when in fact the motorcycle is approaching from the left. Issuing an alert to both vehicles to inform the driver to look to the left, and the motorcyclist to be aware of a car exiting.

Figure 37 shows a situation illustrating the filtering motorcycle use case.

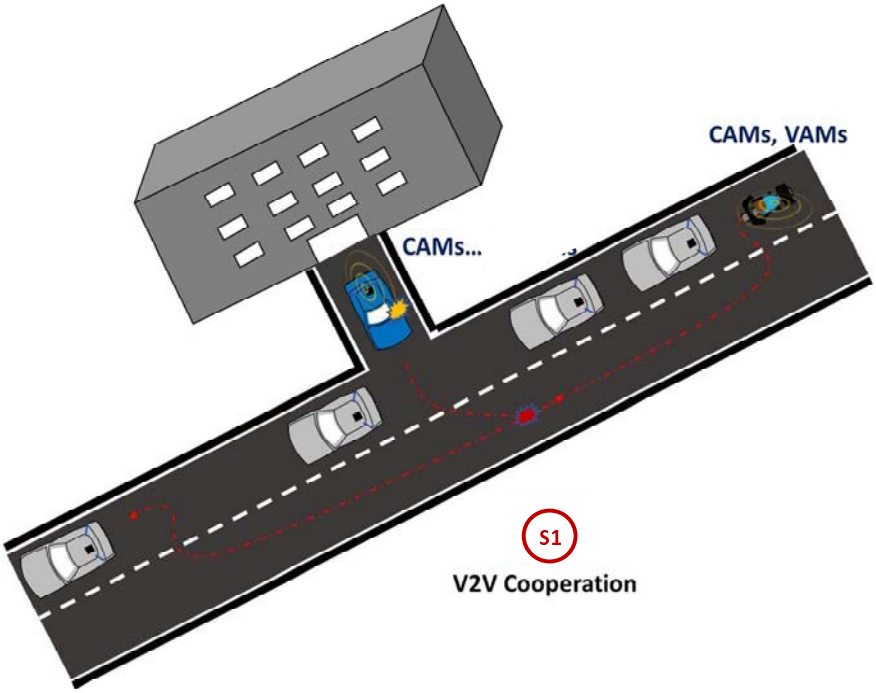


Figure 37: Filtering motorcycle use case

5.7.3.2 Possible ITS architecture and ITS-S services

The two following ITS architectures seem to be the appropriate ones for this use case:

- V2V Release 1 cooperation.
- V2V Release 2 cooperation.

Possible ITS-S Services:

- CA basic service.
- CAS/VBS.

5.7.3.3 Possible implementation scenarios

Scenario 1: V2V Release 1 cooperation:

The subject vehicle which is leaving the building broadcasts CAMs. The motorcyclist is also broadcasting CAMs. Then both the subject vehicle and the VRU perceive their respective trajectories and may adapt their own accordingly to avoid a collision.

5.7.3.4 Void

5.7.4 Overtaking motorcycle use case

5.7.4.1 High level description

A motorcycle and a vehicle exchange message to lower the collision risk when the presence of the motorcycle is not expected by the driver.

A motorcycle is behind a large and/or slow vehicle in a country road setting. The rider is keen to overtake but has limited visibility of the road ahead and there are frequently cars passing in the oncoming lane. The aim is to reduce the collision risk.

Figure 38 shows a situation illustrating the filtering motorcycle use case.

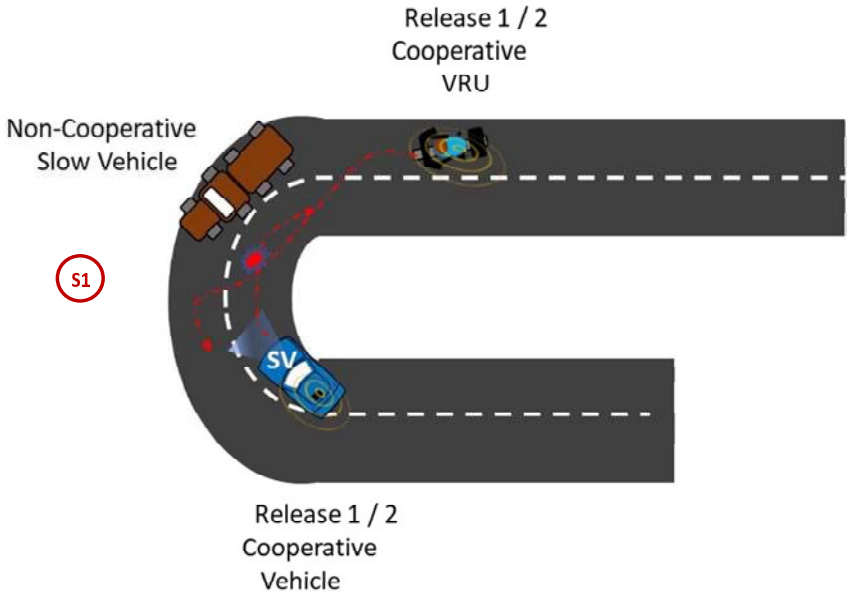


Figure 38: Overtaking motorcycle use case

5.7.4.2 Possible ITS architecture and ITS-S services

The two following ITS architectures seem to be the more appropriate ones for this use case:

- V2V Release 1 cooperation.
- V2V Release 2 cooperation.

Possible ITS-S Services:

- CAS/VBS.

5.7.4.3 Possible implementation scenarios

Scenario 1: V2V Release 1 cooperation:

The Subject Vehicle (SV) broadcasts CAMs to signal its approach. It is the same at the level of the motorcyclist. Then both road users may act to avoid a collision.

5.7.4.4 Void

5.7.5 Overtaking motorcycle and turning vehicle use case

5.7.5.1 High level description

A motorcycle and a vehicle exchange message to reduce the risk of collision when the presence of the motorcycle is not expected by the driver.

A motorcycle is on a rural road behind a vehicle with a wide body (farm equipment or larger trailers) so that the turn signals are occulted or are already blind that they can hardly be seen when wanting to overtake. The tractor driver wants to turn left onto a road or field, but the motorcycle is not visible in the mirror. The aim is to reduce the risk of collision between the possibly overtaking motorcycle and the turning vehicle.

Figure 39 shows a situation illustrating the overtaking motorcycle and turning vehicle use case.

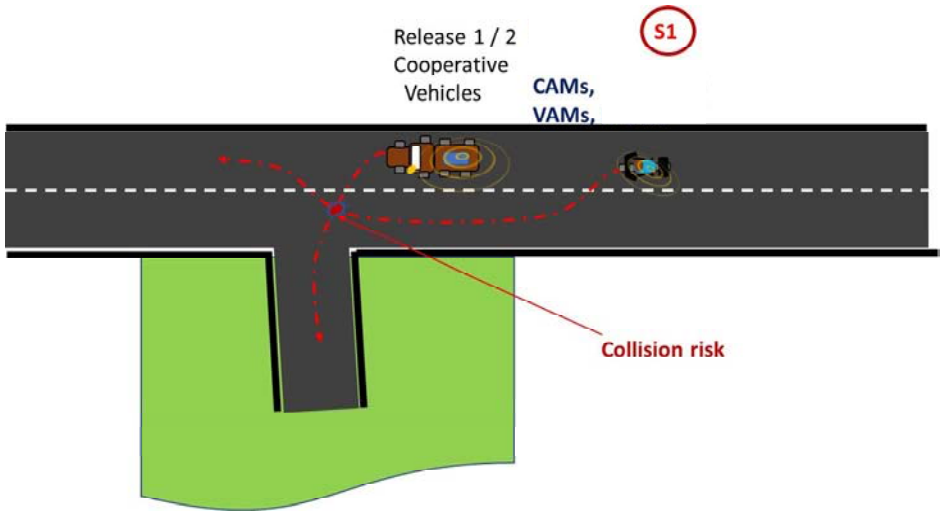


Figure 39: Overtaking motorcycle and turning vehicle use case

5.7.5.2 Possible ITS architecture and ITS-S services

The two following ITS architectures seem to be the more appropriate ones for this use case:

- V2V Release 1 cooperation.
- V2V Release 2 cooperation.

Possible ITS-S Services:

- CAS.
- CAS/VBS.

5.7.5.3 Possible implementation scenarios

Scenario 1: V2V Release 1 cooperation:

The Subject Vehicle (SV) and the motorcyclist broadcast CAMs/VAMs to signal their evolutions. Then both road users may act to avoid a collision.

5.7.5.4 Void

5.7.6 Turning vehicle with PTW in the blind spot use case.

5.7.6.1 High level description

A motorcycle and a vehicle exchange message to reduce the risk of collision when the presence of the motorcycle is not expected by the driver.

Figure 40 shows a situation illustrating the turning vehicle with PTW in the blind spot use case.

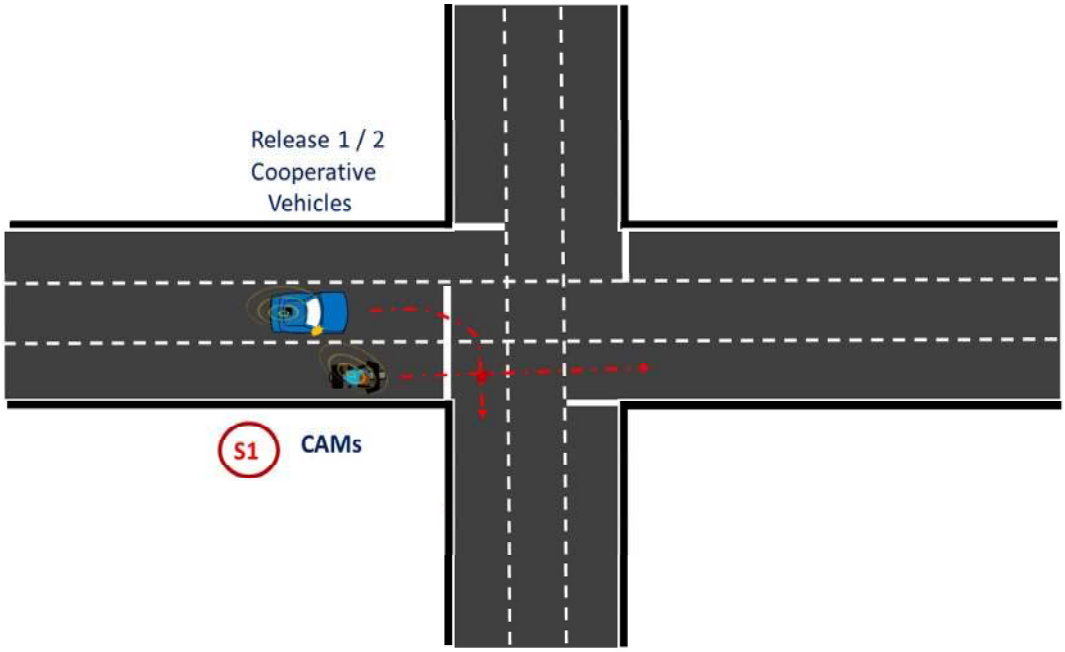


Figure 40: Turning vehicle with PTW in the blind spot use case

5.7.6.2 Possible ITS architecture and ITS-S services

The two following ITS architectures seem to be the most appropriate ones for this use case:

- V2V Release 1 cooperation.
- V2V Release 2 cooperation.

Possible ITS-S Services:

- CAS.
- CAS/VBS.

5.7.6.3 Possible implementation scenarios

Scenario 1: V2V Release 1 cooperation:

The Subject Vehicle (SV) and the motorcyclist broadcast CAMs/VAMs to signal their evolutions. Then both road users may act to avoid a collision.

5.7.6.4 Possible implementation scenarios options

The S2 is only possible if a VRU gets the capability to contribute to a manoeuvres' coordination session.

5.7.7 VRU presence awareness use case

5.7.7.1 High level description

VRUs (such as bicycles and pedestrians) and other traffic participants (such as cars and trucks) are informed about their mutual presence, especially in situation where their awareness is incomplete, e.g. due to reduced visibility towards each other.

5.7.7.2 Possible ITS architecture and ITS-S services

The following ITS architectures seem to be the most appropriate ones for this use case:

- V2V cooperation.
- I2V cooperation.
- C2V cooperation.

Possible ITS-S Services:

- CAS.
- VBS.
- CPS.

5.7.7.3 Possible implementation scenarios

Scenario 1: V2V Cooperation:

The VRU presence awareness can be enabled by traffic participants exchanging information related to the VRU's driving environment (e.g. connected vehicles reporting about themselves or about other stations via CAMs or CPMs) and/or related to the VRU's current and estimated future kinematic state (e.g. reporting by the VRU itself or external status assessment by other connected traffic participants via CAMs and/or CPMs).

Scenario 2: I2V Cooperation:

If available, VRU presence awareness can also be offered by means of infrastructure (e.g. DENMs, CPMs). The latter may detect the VRU and traffic participants in its vicinity with its sensors and warn them about the presences of each other.

Scenario 3: C2V Cooperation:

A third option to offer VRU presence awareness is by making use of the mobile communication network. Sensor data and data obtained by V2X communication from traffic participants related to the VRU and road users in its vicinity may be gathered and disseminated over U.U links to the involved stations.

5.7.7.4 Possible implementation scenarios options

ITS-S Scenario 1 option:

This implementation option refers to V2V cooperation. In this implementation VRUs may make connected stations aware of their presence by sharing VAMs containing their current state and predicted trajectories. Connected vehicles may in turn inform the VRUs about their kinematic states by transmitting CAMs or extended CAMs. Additionally, other connected traffic participants may make use of CPMs to share their perception related to the VRUs and other road users in its vicinity sensed through their on-board sensors.

ITS-S Scenario 2 option:

This implementation option refers to I2V cooperation. In this implementation a RSUs may detect VRUs and traffic participants that are in or could come into interaction with the VRUs. The RSU then sends out CPMs to inform the VRUs about the other traffic participants and vice-versa. Additionally, to the description of the kinematic states of VRUs and traffic participants the CPMs may include information about detected free spaces, further enhancing the awareness of connected stations.

ITS-S Scenario 3 option:

This implementation option refers to C2V cooperation. In this implementation the server gathering data with connected concerning VRUs and traffic participants in their surroundings may aggregate this data (e.g. dealing from sensors looking at the scene from different perspectives) and re-disseminate it over dedicated Unicast links. This enables to send the relevant data only to the pertinent stations. The data may be encoded in CPMs disseminated on an IP-based protocol stack or use other formats. While this implementation may mitigate flooding of the V2X communication channel for VRUs presence awareness, it is less suitable for VRU collision warning (clause 5.7.11) and VRU brake or steering intervention due to their much more stringent latency requirements.

5.7.8 VRU collision warning use case

5.7.8.1 High level description

VRUs and other human-driven traffic participants (i.e. of low automation level) are warned about possible collisions based on their current driving state.

5.7.8.2 Possible ITS architecture and ITS-S services

The two following ITS architectures seem to be the more appropriate ones for this use case:

- V2V cooperation.
- I2V cooperation.

Possible ITS-S Services:

- CAS.
- VBS.
- CPS.

5.7.8.3 Possible implementation scenarios

Scenario 1: V2V Cooperation:

The VRU collision warning can be enabled by VRUs and traffic participants exchanging information related to their current or estimated future kinematic states. This may occur in the form of explicit collision warnings or by means of implicit information exchange based on the dissemination of the traffic participants' kinematic states.

Scenario 2: I2V Cooperation:

VRU collision warning may also be enabled by RSUs tracking traffic participants in their environment and sending them implicit or explicit collision warnings.

5.7.8.4 Possible implementation scenarios options

ITS-S Scenario 1 option:

This implementation option refers to ITS-S Scenario 1. In addition to the kinematic information in CAMs and VAMs, road users can make use of object information received from other traffic participants by means of CPMs or cases by DENMs to activate the VRU collision warning. Thus, warnings about collision risks with both cooperative as well as non-cooperative VRUs can be issued substantially contributing to traffic safety.

ITS-S Scenario 2 option:

This implementation option refers to ITS-S Scenario 2. In scenarios especially safety critical for VRUs, the installation of RSUs may substantially contribute to the VRU's safety. High accuracy tracking of traffic participants is enabled by well-placed sensors covering the critical area. This allows for enhanced VRU collision warning by means of CPMs and DENMs, without requiring the presence of additional connected stations reporting the situation.

5.7.9 VRU brake or steering intervention use case

5.7.9.1 High level description

In contrast to the VRU collision warning described in clause 5.7.11, for human driven or moderately automated traffic participants, higher automation levels allow for VRU brake or steering intervention. It is based on the information exchange between connected ITS-S related to VRUs and their driving environment.

5.7.9.2 Possible ITS architecture and ITS-S services

The following ITS architectures seem to be the more appropriate ones for this use case:

- V2V cooperation.
- I2V cooperation.

Possible ITS-S Services:

- CAS.
- VBS.
- CPS.

5.7.9.3 Possible implementation scenarios

Scenario 1: V2V Cooperation:

The VRU braking or steering intervention can be enabled by highly automated traffic participants receiving information from other connected traffic participants related to an imminent collision risk with a VRU. As for collision warning this may occur in the form of explicit collision warnings or by implicit information exchange based on the dissemination of the traffic participants' kinematic states.

Scenario 2: I2V Cooperation:

VRU braking or steering intervention may also be enabled by RSUs tracking traffic participants in their environment and sending them implicit or explicit information for automated or highly automated driving intervention for VRU protection.

5.7.9.4 Possible implementation scenarios options

ITS-S Scenario 1 option:

This implementation option refers to ITS-S Scenario 1. In addition to the kinematic information in CAMs and VAMs, road users can make use of object information received from other traffic participants by means of CPMs or, cases, by DENMs to activate the VRU brake or steering intervention. An important difference to a simple collision warning is the higher relevance of functional safety considerations as supported by Day 3+ V2X services.

ITS-S Scenario 2 option:

This implementation option refers to ITS-S scenario S2. The equipment of RSUs with object tracking sensors in high-risk regions for VRUs allows to share this data by means of CPMs. This data can further be enhanced by including predicted trajectories of VRUs into CPMs building a solid basis for VRU brake or steering interventions.

5.7.10 VRU safety beacon use case

5.7.10.1 High level description

ETSI TS 103 300-3 [i.15] introduces the concept of "low risk area" which conditions the dissemination of VAMs. When entering a low-risk area, the VRU attached devices stop disseminating their VAMs. The current issue is how an active VRU attached device knows that the VRU is moving in a low-risk area?

A low-risk area can be delimited by physical elements or can be delimited by a safety beacon providing delimitation information (e.g. a dedicated lane following the curvature of the road).

Moreover, it will take a long time for the equipment of all VRUs with an attached VRU device. So, many VRUs will not be protected during this long deployment time. A solution is then to use a low cost, low size, low power consumption roadside unit, which is delimiting VRU protected areas, acting as a cluster leader (even if static) and disseminating VAMs to approaching vehicles informing or alerting them of the presence of VRUs (equipped or not) in the low-risk area.

Figure 41 shows a situation illustrating the safety beacon use case.

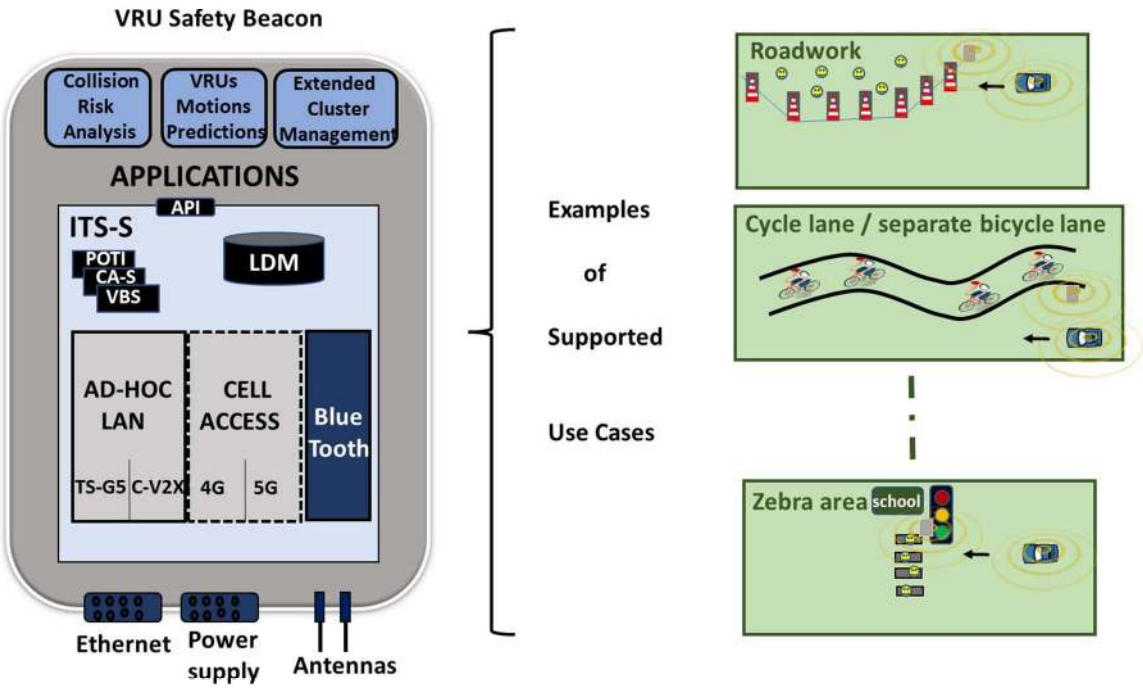


Figure 41: VRU Safety Beacon supporting use case

5.7.10.2 Possible ITS architecture and ITS-S services

The following ITS architecture seems to be the more appropriate one for this use case:

- I2V Cooperation.

Possible ITS-S Services:

- VBS.

5.7.10.3 Possible implementation scenarios

Scenario 1: I2V VAMs broadcasting:

VAMs signalling the presence of a cluster of VRUs (equipped or not).

Release 2 cooperative vehicles act according to received VAMs.

5.7.10.4 Implementation scenario flow diagram

The following flow diagram (Figure 42) illustrates the described ITS implementation scenario.

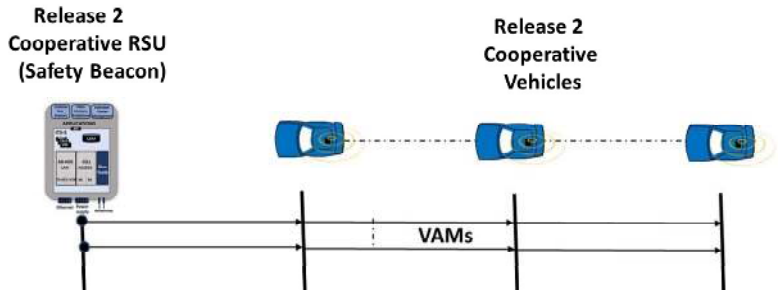


Figure 42: Flow diagram Model 13, VAMs broadcasting

5.7.10.5 Possible implementation scenarios options

The safety beacon has the capability to detect the presence of VRUs (equipped or not) in the low-risk area and then, acting as a cluster leader signals them using VAMs.

5.7.11 VRU complex interaction use case

5.7.11.1 High level description

In case the VRUs are equipped with personal ITS Stations, or ITS Stations attached to the VRU vehicles, the VRUs can:

- Increase their visibility by sending out VAMs, enabling the car to calculate collision risk and derive appropriate actions like driver warning or preparation of the onboard active safety systems.
- Increase their perception by receiving CAMs or other messages like CPMs or DENMs, allowing to also warn the VRU, which in many situations is very meaningful, especially since the VRU is willing to take action to prevent the accident.
- In a later instance cooperative with other road users to execute coordinated manoeuvre such as it can be anticipated with vehicles manoeuvre coordination.

The first two points are especially advantageous in situations where no other ITS equipment (like ITS-equipped road infrastructure) is nearby. In addition, the VRU device can have information that is not easy to find from outside, starting with the sub-profile of the VRU type, its stability status and its future trajectory, the latter being especially true for ITS devices attached to VRU vehicles (bicycles, scooters) whose degrees of freedom are much less than those of pedestrians.

The latter can enable many manoeuvres that pose a risk for the VRU. This can for example be passing a stationed truck at a red light to access the dedicated bike waiting area in front of the lane or enable e-scooter and cyclist coordination when crossing each other at bike path.

However, such critical situation requires that cooperative vehicle(s) and VRU(s) have the capability to perceived broadcasted signals.

Figure 43 shows a situation illustrating the VRU complex interaction use case.

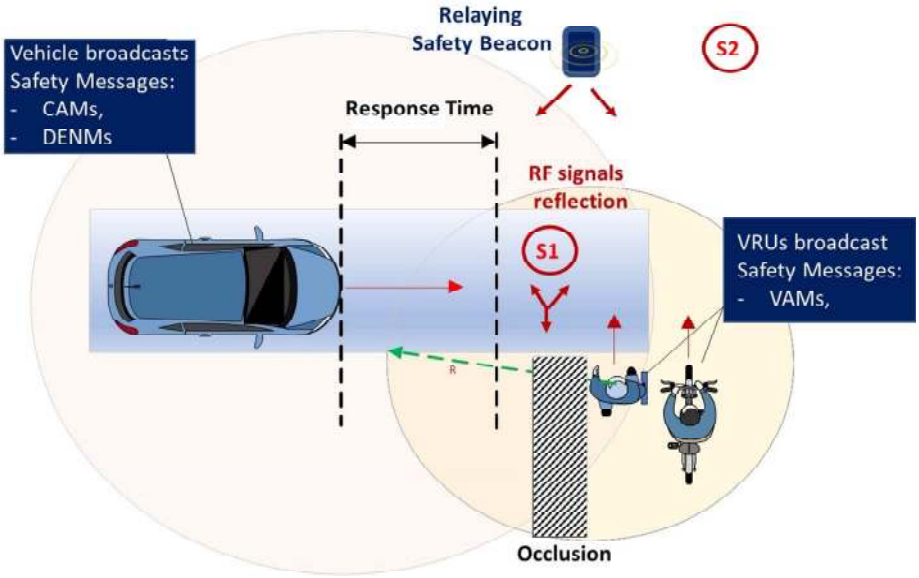


Figure 43: Complex interaction situation use case

5.7.11.2 Possible ITS architecture and ITS-S services

The following ITS architectures seem to be the more appropriate ones for this use case:

- RF signals are reflected by the road surface and infrastructure.
- I2V Cooperation.

Possible ITS-S Services:

- Any basic service available at the level of cooperative vehicles and VRUs.

5.7.11.3 Possible implementation scenarios

Scenario 1: Verification that the standard messages broadcasted by cooperative vehicles and VRUs are well reflected by the road infrastructure:

During the long period of C-ITS assessment, it has been proved that RF signals are easily reflected by the road surface and elements of the road infrastructure. For critical situations such reflectivity property needs to be checked.

Scenario 2: Addition of a safety beacon (RSU) acting as repeater of received standard messages:

If broadcasted standard messages cannot be received by cooperative vehicles or/and VRUs, a safety beacon acting as repeater can be appropriately positioned to enable such perception.

5.7.11.4 Possible implementation scenarios options

If a safety beacon (low cost RSU) is used to relay received standard messages, this will be achieved on top of layer two for services which are not benefiting of the geonetworking capability. It can be automatically achieved for DENMs which are using the geonetworking.

5.7.12 Void

5.7.13 Extended cluster management use case

5.7.13.1 High level description

As above described, in case of an active VRU safety beacon, the cluster management is simplified, and the beacon automatically becomes the cluster leader in the delimited low-risk area. VRU cluster management is fully described in ETSI TR 103 300-1 [i.13], ETSI TS 103 300-2 [i.14] and ETSI TS 103 300-3 [i.15].

Moreover, for VRUs which present a high-risk profile (high vulnerability level or high velocity like cyclists or scooters), it could be necessary to consider them out of the VRU cluster and keep them disseminating their VAM for enabling vehicles quickly detecting a dangerous behaviour (stability problem, unexpected change of trajectory/velocity) which may require an immediate evolution of the collision avoidance strategy. Sending out individual VAMs will be especially important close to the borders of the safe zones.

5.7.13.2 Possible ITS architecture and ITS-S services

The following ITS architecture seems to be the most appropriate one for this use case:

- V2P.

Possible ITS-S Services:

- Evolution of the VAM.

5.7.13.3 Possible implementation scenarios

Scenario 1: V2P cooperation including extended cluster management:

Even being member of a cluster, a VRU which is identified as particularly vulnerable may continue to broadcast VAMs. Its particularity can be identified in the VAM to enable receiving vehicle(s) to adapt their collision avoidance strategy.

5.7.13.4 Possible implementation scenarios options

Such extended cluster management option needs to be based on a deep analysis of VRU "vulnerability profiles" which are justifying such approach.

5.8 Dynamic navigation

5.8.1 ITS service introduction

Automated dynamic navigation is the first application to consider. Navigation requires that the automated vehicle be following the road infrastructure which is built for this purpose. They are supported by road horizontal marking and vertical signs. Road horizontal marking enables sensors (e.g. front camera) to stay in the marks (e.g. active lane keeping) and signal possibilities or not to overtake other vehicles. Vertical signs are used for providing traffic code rules and signals static road hazards. However, road horizontal marking like traffic signs have been made for human driven vehicles and are not always appropriate to automated vehicles which may require expensive artificial intelligence to be recognized. Moreover, road horizontal marking like vertical signs may be occulted during adverse weather conditions (rain, fog, snow, etc.), road degradation and hidden by other vehicles such as trucks. It is then required to find some redundant systems to overcome these economical and perception problems.

Dynamic navigation means that a given initial itinerary may become impossible due to an unexpected road hazard which may disturb the traffic in one portion of the itinerary. This means that an alternative route needs to be identified to overcome this problem so changing the initial itinerary. Moreover, even if the initial itinerary stays possible, it could become more efficient, for traffic optimization and pollution reduction to balance the overall traffic between different itineraries.

In case of road hazard, the instructions of the road authorities have to be followed, as they bear the sovereign responsibility for the population. Individual will not have to stand in the way.

5.8.2 Detour management use case

5.8.2.1 High level description

A lot of area hazards may disturb a vehicle itinerary during its evolution from an origin to a destination (e.g. area which are not authorized to the vehicle type, flooding, fire, closed road (roadwork, closed bridge/closed railway level crossing, etc.).

Figure 44 considers a low emission zone which is not authorized to vehicles not using electrical propulsion power as it may appends in many cities. In such case, the not-authorized vehicle will have to change its itinerary if planned to cross the city.

Figure 44 shows a situation illustrating the detour management use case.

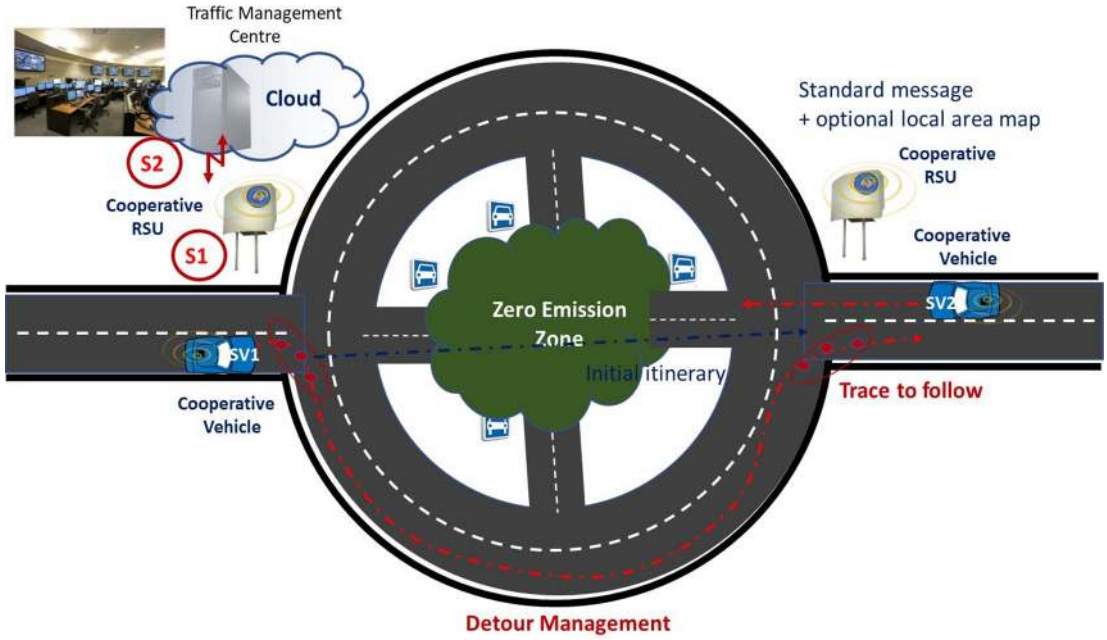


Figure 44: Detour management use case

5.8.2.2 Possible ITS architecture and ITS-S services

The two following ITS architectures seem to be the most appropriate ones for this use case:

- I2V cooperation.
- C2V cooperation.

Possible ITS-S Services:

- Extended DENMs or IVIMs providing traces (groups of way points) to follow according to its targeted destination and encountered topographic situations offering several possibilities (recommended choice).

5.8.2.3 Possible implementation scenarios

Scenario 1: I2V Cooperation:

A connected vehicle which is not authorized to enter in a planned area receives from a local RSU advice to change its itinerary. The advice provides traces to follow when several possibilities exist. If the number of traces is too important, a local map can be optionally provided indicating the recommended itinerary.

If the destination of the user is inside the not-authorized area, a Parking Availability information can be provided to the user (see the PAS in clause 5.10) to park and Ride using other available transportation services.

Scenario 2: C2V Cooperation:

A connected vehicle which is not authorized to enter a planned area may request to a traffic management centre to provide him a recommended detour itinerary enabling to reach its destination without having to cross the restricted area. Related to its destination, it may request to be supported to park its vehicle before accessing the restricted area and then use the transports facilities available inside the restricted area (Park and Ride).

5.8.2.4 Possible implementation scenarios options

ITS-S Scenario 1 option:

Existing ITS-S basic services such as IVI or DEN could be extended to support such ITS application. If the broadcast mode is used, several messages could be necessary according to the planned destination of the subject vehicle as several detours could be possible. In some circumstances, the detour could be important, so requiring many traces to provide when several trajectories' possibilities exist.

ITS-S Scenario 2 option:

Existing ITS-S basic services such as IVI or DEN may also be extended to support such ITS-S application. But in this case, it would be preferable that the user sends a request to the traffic management centre which could propose him the right itinerary to follow according to its initial destination.

5.9 Contextual dedicated corridor management

5.9.1 ITS service introduction

The deployment of new vehicle types in terms of propulsion system or automated level, as well as new usages of vehicles (vehicle sharing and pooling, new public transport) combined to priority given to some special vehicles (e.g. emergency vehicles) lead to consider the dynamic management of traffic corridors which can be reserved according to given contextual traffic conditions to classes of vehicles which satisfy predefined conditions.

Five types of use cases are identified below although many others could be imagined in the future according to road infrastructures and vehicles evolutions.

When the context is referred to, one key context element is the "traffic context" or fluidity which can be characterized when considering the traffic density and the traffic flow rate such as represented in Figure 45.

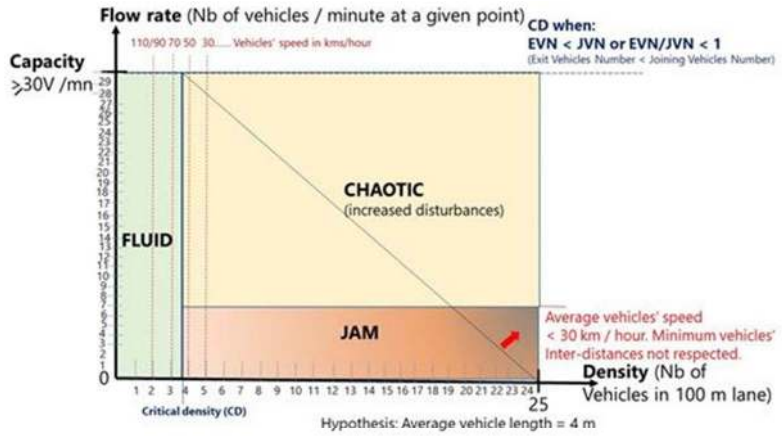


Figure 45: Proposed characterization of the traffic fluidity

This traffic fluidity characterization has been proposed by the French project PAC V2X and used during the project experimentation on motorway and urban area.

NOTE: This model does not include VRUs which could lead to a much higher density.


Taking the motorway example, when the traffic context is fluid on all the lanes, a dedicated corridor does not need to be created, but when the traffic becomes chaotic or when there is a traffic jam, it may become necessary to give the priority to some specific vehicles by assigning them a dedicated corridor and avoiding that this assigned corridor be used by other non-authorized vehicles.

5.9.2 Corridor dedicated to an emergency vehicle, rescue/recovery, prioritized/safety vehicle use case

5.9.2.1 High level description

In chaotic or traffic jam situations, it becomes necessary to facilitate the evolution of emergency vehicles which are active to provide a rescue to road users and more generally people in danger. This can be achieved by reserving a dedicated corridor which cannot be used by other non-authorized vehicles.

Figure 46 shows a situation illustrating the corridor dedicated to an emergency vehicle use case.

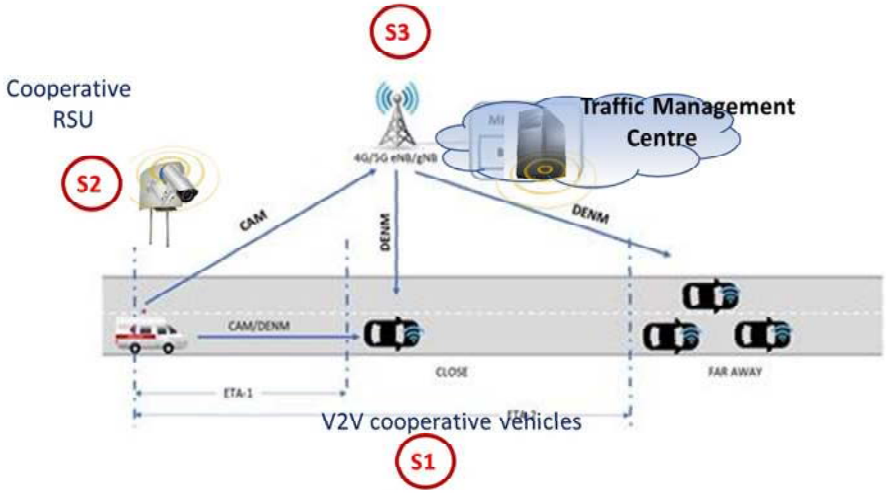

NOTE: Extension of the model provided by the European project 5G CARMEN.

Figure 46: Corridor dedicated to an emergency vehicle use case

5.9.2.2 Possible ITS architecture and ITS-S services

The following ITS architectures are appropriate for this use case:

- V2V cooperation.
- I2V cooperation.
- C2V cooperation.

Possible ITS-S Services:

- Several ITS- services can be used. CAS and DENS are the basic services which are considered here, but of course, CPS could as well be used.

5.9.2.3 Possible implementation scenarios

Scenario 1: V2V Cooperation:

The dedicated corridor is dynamically created by the emergency vehicle which signals its approach by broadcasting standard messages indicating that it is in an active rescue service.

Upon receiving such information, relevant cooperative vehicles need changing of lane as soon as possible to give way to the emergency vehicle. Once the emergency vehicle passed by, the relevant vehicles may return in their initial lane.

Scenario 2: I2V Cooperation:

Upon detection of the approach of an emergency vehicle in a rescue mission, the RSU signals it so asking all cooperative vehicles to release the lane in which the emergency vehicle is moving. Once the emergency vehicle overtook concerned cooperative vehicles, they may be back in their initial lane.

Scenario 3: C2V Cooperation:

Upon detecting the approach of an emergency vehicle in a rescue mission, the traffic management centre sends unicast request to relevant connected vehicles to give way to the emergency vehicle. Once the emergency vehicle overtook them, the traffic management centre may re-open the corridor used by the emergency vehicle to other vehicles.

5.9.2.4 Possible implementation scenarios options

ITS-S Scenario 1 option:

The emergency vehicle is a Release 1 cooperative vehicle using CAMs indicating in its emergency container that the vehicle is in an emergency operation. Consequently, all relevant cooperative vehicles need giving way to the emergency vehicle as soon as possible acting according to possibilities offered by the current traffic context.

ITS-S Scenario 2 option:

The RSU detects the approach of an emergency vehicle in operation via its received CAMs. Then, the RSU broadcasts DENMs "emergency vehicle approaching" so implicitly requesting relevant cooperative vehicles to give way to it.

Upon reception of DENMs, the relevant cooperative vehicles need giving way to the emergency vehicle as soon as possible according to received information and possibilities offered by the current traffic context.

ITS-S Scenario 3 option:

The traffic management centre detects the approach of the emergency vehicle in each area via received CAMs. As for S2, the traffic management centre may send instructions to relevant vehicles using Unicast links to organize the priority evolution of the emergency vehicles. DENMs can be sent to relevant vehicles.

5.9.3 Void

Figure 47: Void

Figure 48: Void

5.9.4 Corridor dedicated to other priority vehicles use case

5.9.4.1 High level description

Other types of priority vehicles having a specific permission may share one or several dedicated corridors. The usage rules may include specific traffic conditions criteria.

For example, when the traffic is fluid, all existing lanes may be used by any type of vehicles, but when the traffic becomes chaotic or in case of traffic jams, dedicated corridors can be created and reserved to authorized vehicles which have a recognized permission:

- Fully automated vehicles.
- Pooled vehicles which are used by several occupants.
- Road operators' vehicles which are used for the road infrastructure maintenance or interventions during critical winter and other bad weather situations such as flooding, snow fall, etc.

5.9.4.2 Possible ITS architecture and ITS-S services

The two following ITS architectures seem to be the most appropriate ones for this use case:

- I2V cooperation.
- C2V cooperation.

Possible ITS-S Services:

- When necessary, extension of the CAM indicating the object of the vehicle which provides it a particular priority in accessing an identified corridor. If necessary, extension of the DENMs to signal the presence of a dedicated corridor for vehicles complying to associated access rules and traffic conditions.

5.9.4.3 Possible implementation scenarios

Scenario 1: I2V Cooperation:

Cooperative RSU signals the presence ahead of a particular corridor dedicated to the support of a specific purpose. This is including the object of the priority and associated rules to be respected for granting an access authorization. This may also be including traffic conditions for non-conforming vehicles getting an access right.

Scenario 2: C2V Cooperation:

The traffic management centre informs conforming subject vehicles of the presence of a dedicated corridor which can be used by them. The information includes the object of the priority and the associated rules to be respected for granting an access authorization.

If necessary, the traffic management centre receives constantly extended CAMs from cooperative vehicles to identify the relevant vehicles to address (u.u link) when necessary.

5.9.5 Hard Shoulder Running use case

5.9.5.1 High level description

On routes with regular recurring high utilization during for example commuter traffic, opening the hard shoulder is an option to raise traffic flow on the existing road network. The EU EIP Handbook for ITS Core Services [i.9] describes the process for Hard Shoulder Running (TMS-04) in detail. Figure 49 shows a common installation for hard shoulder running.

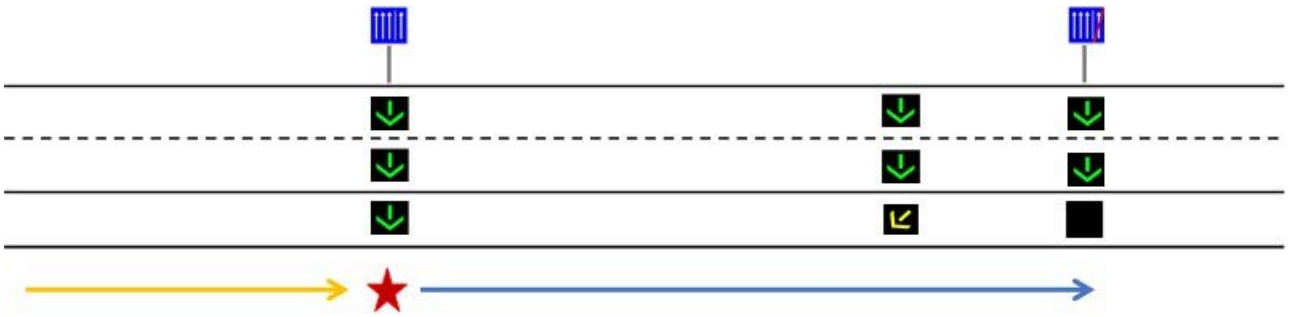


Figure 49: Hard Shoulder Running

I2V cooperation provides information to vehicles consisting of the available lanes on the road segment including optional speed restrictions. In addition, V2V messages can be used as a trigger to open the hard shoulder or sending out clearance orders quicker, for instance if a "Stationary Vehicle" DENM is received, which indicates a safety risk on the road. Once the safety risk is removed, the hard shoulder can be reopened if necessary.

5.9.5.2 Possible ITS architecture and ITS-S services

The two following ITS architectures seem to be the most appropriate ones for this use case:

- V2V Cooperation.
- I2V Cooperation.

Possible ITS-S Services:

- V2V CAM, DENM.
- I2V IVI.

5.9.5.3 Possible implementation scenarios

Scenario 1: I2V Cooperation:

Infrastructure RSU send IVI regarding available lanes on a road segment and orders in case of hard shoulder clearance.

Vehicle CAM and DENM can be used as traffic jam indicator for the road operator (infrastructure) to open or close the hard shoulder. Indicators could be:

1) Average vehicle speed and number of vehicles (CAM).
2) Stationary vehicle on the road and traffic jam detected (DENM).

5.9.6 Roadwork warning (long-term) use case

5.9.6.1 High level description

I2V cooperation provides information to vehicles on current valid roadwork and associated constraints. The information refers to long term roadworks and can include signalling information such as forbidden overtaking, forbidden access to special vehicle categories, alternative routes (see detour management), as well as topological information about modified road layouts.

In particular, the information may include a systematic period of road closing from one staring hour to an ending hour.

This could be the object of a DEN Service update.

5.9.6.2 Possible ITS architecture and ITS-S services

The two following ITS architectures seem to be the most appropriate ones for this use case:

- I2V cooperation.
- C2V cooperation.

Possible ITS-S Services:

- DENS can be used to inform road users of long-term roadwork activities. This could require an extension.

5.9.6.3 Possible implementation scenarios

Scenario 1: I2V Cooperation:

- Cooperative RSU signals the presence ahead of a long-term roadwork and provides details about specific mobility constraints.
- Receiving vehicles apply the communicated constraints.

Scenario 2: C2V Cooperation:

The traffic management centre informs approaching vehicles of the presence of a long-term roadwork and its currently applicable traffic constraints.

5.9.6.4 Possible implementation scenarios options

ITS-S Scenario 1 option:

- RSU broadcasts extended DENMs informing about a long-term roadwork ahead and its associated current traffic restrictions.
- Receiving vehicles apply the communicated traffic restrictions.

ITS-S Scenario 2 option:

The traffic management centre receives, and analyses addressed CAMs to detect relevant subject vehicles which are approaching a long-term roadwork area. When approaching a long-term roadwork area, the traffic management centre addresses DENMs to the concerned subject vehicles to inform them of the current traffic restrictions existing at the level of the roadwork.

5.10 POIs management

5.10.1 ITS service introduction

Several aspects of POIs management are already considered in clause 5.2 and SDOs' publications.

They have been included in clause 5.2 because they are mandatory for the full operationality of vehicles and are supported by dedicated ADASs (e.g. TPMS which is mandatory at the E.C level and vehicle energy monitoring system).

Other POIs are numerous and for the time being are not part of the present document, excepted the Parking Management Service as many POIs have associated to them a parking to store vehicles when their users are not using them.

Several types of parking need to be considered and their related points of interest can be identified to be considered in further versions of the Basic Set of Applications.

Moreover, the parking management application may consider several steps in the parking process, since the identification of available parking at indicated destination(s):

- The selection of an appropriate parking and parking space and its booking.
- The guiding to the parking entry.
- The possibility of the use of an automated parking valet.
- Then the payment of the parking when leaving it.

Figure 50 illustrates the various steps of the parking management process.

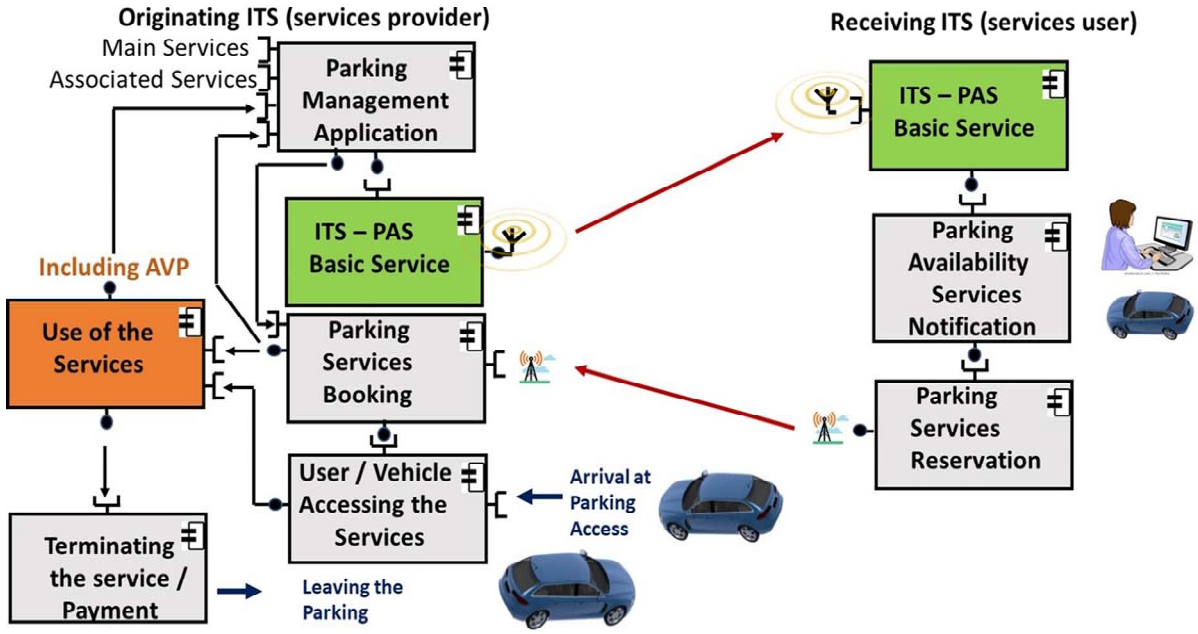


Figure 50: Illustration of the parking management ITS service process

This ITS service process can be used as a reference model for many POIs which may include these different phases (availability notification, reservation, use, payment).

A generic approach for POI Availability Service specification is introduced in clause 5.10.6.

5.10.2 Parking Availability Service use case

5.10.2.1 High level description

The Parking Availability basic Service (PAS) is a service which provides real time information about the availability of main user' parking services (vehicle parking, parking space types and services, parking space reservation and payment) and optionally Related POIs locally available (for example: Valet Parking, Energy supply, Tyre Pressure gauge and adjustment, vehicle washing, etc.).

This information is provided via a standard message POIM-PA (Parking Availability Message) which can be locally broadcasted, provided on demand (unicast pulling mode) or more systematically addressed on a contractual basis (unicast pushing mode).

5.10.2.2 Possible ITS architecture and ITS-S services

The two following ITS architectures seem to be the most appropriate ones for this use case:

- I2V Management.
- C2V Management.

Possible ITS-S Services:

- Parking Availability Service and Related POIs services.

5.10.2.3 Possible implementation scenarios

Scenario 1: I2V Management:

Cooperative RSU signals the presence ahead of different types of parking and provides real time information about the availability of provided services (parking and Related POIs services). Possibility to reserve services and payment conditions are also optionally available.

Receiving vehicles may then reserve a parking space and related service(s) via another POI service which can be a POI management proprietary service.

Scenario 2: C2V Management:

A central parking management system informs approaching vehicles of the presence of different types of parking and provides real time information about the availability of these services (parking and related services). The parking management system may push the information to road users which have contracted the service, or the road user may pull the information from the parking management system.

Receiving vehicles may then reserve a parking space and associated service(s) via another POI service.

5.10.2.4 Implementation scenario flow diagram

The following flow diagram (Figure 51) illustrates the described ITS implementation scenarios.

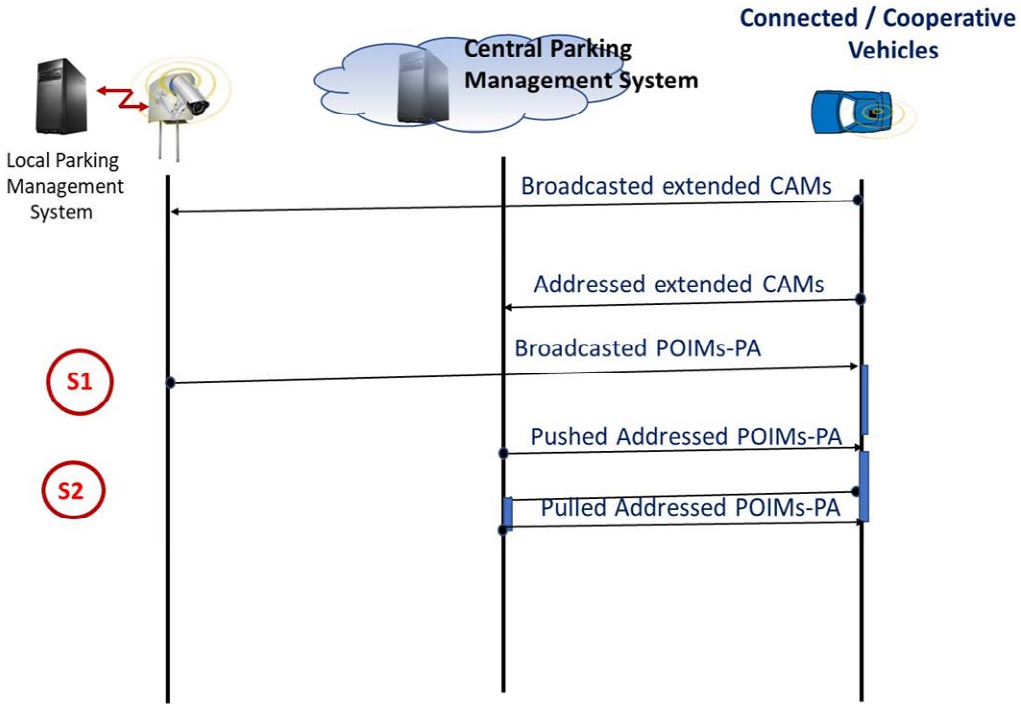


Figure 51: Flow diagram Model 15, CAMs and POIMs-PA addressing and broadcasting

5.10.2.5 Possible implementation scenarios options

ITS-S Scenario 1 option:

Local parking management system, via RSUs broadcasts POIMs-PA informing about parking and associated services and their access conditions.

Receiving vehicles may reserve a parking place/space and associated service(s) information via other POIs management services.

ITS-S Scenario 2 option:

A central parking management system provides information about parking availability and associated services including access conditions. This can be provided to road users on a contractual basis when approaching managed parking places (push mode triggered by the reception of CAMs). This can be also provided on demand of road user (pull mode) when necessary.

5.10.3 Void

5.10.4 Automated Valet Parking use case

5.10.4.1 High level description

At least, the three following AVP scenarios have been demonstrated and some are starting to be implemented:

- The automated vehicle is moving alone in the parking to find and park in the parking space which has been assigned by the parking manager while booking it. The booking may have been achieved in the past before accessing the parking or can be achieved when accessing the parking. At the booking time, the subject vehicle receives an updated digital map and the route to follow enabling the automated vehicle or the human driver to navigate in the parking to reach safely its assigned parking space. However, for such parking strategy, the subject vehicle needs to receive constantly an accurate GNSS signal or use other positioning technology to be able to achieve the map matching of its position on the used parking digital map. Once parked, an automated vehicle may leave its parking upon request of its human driver or of its owner in case of SAE level 4 or 5 automated vehicles. This request can be sent via the parking manager or directly to the automated vehicle for example using an SMS.

- The automated vehicle is controlled by the parking operator when arriving at the parking entry. This means that the automated subject vehicle receives constantly some manoeuvre instructions (trajectory and velocity) to navigate safely in the parking until reaching its assigned parking space destination. For this purpose, a new facilities layer service, designed for the AVP is needed to ensure interoperability between vehicles and the AVP control system. This means that the parking needs to be equipped with a standard wireless communication network solution enabling the exchange of information between vehicles and the AVP control system. Accurate positioning information of the vehicle should be available for the AVP control system to be capable of controlling the vehicle' trajectory (succession of waypoints) and velocity being indicated by received instructions. For the leaving of the parking, the process is the same in the opposite direction from the assigned parking space to the parking exit. This use case is also known as AVP Type 2 defined in ISO 23374-1 [i.16].

Figure 52 shows the main event flows of AVP Type 2 for parking and retrieving the vehicle. In this case, vehicle's motion is expected to be fully controlled by the AVP Remote Vehicle Operation Sub-System based on information from sensors, including cameras, lidars, radars, etc., installed in the parking facility and operated by the AVP service provider. The AVP Remote Operation Sub-System constructs the environmental model using sensors inputs and periodical status information from the vehicle and provides manoeuvre instruction to the vehicle to steer it along the path, calculated by the AVP Remote Operation Sub-System, to the target position.

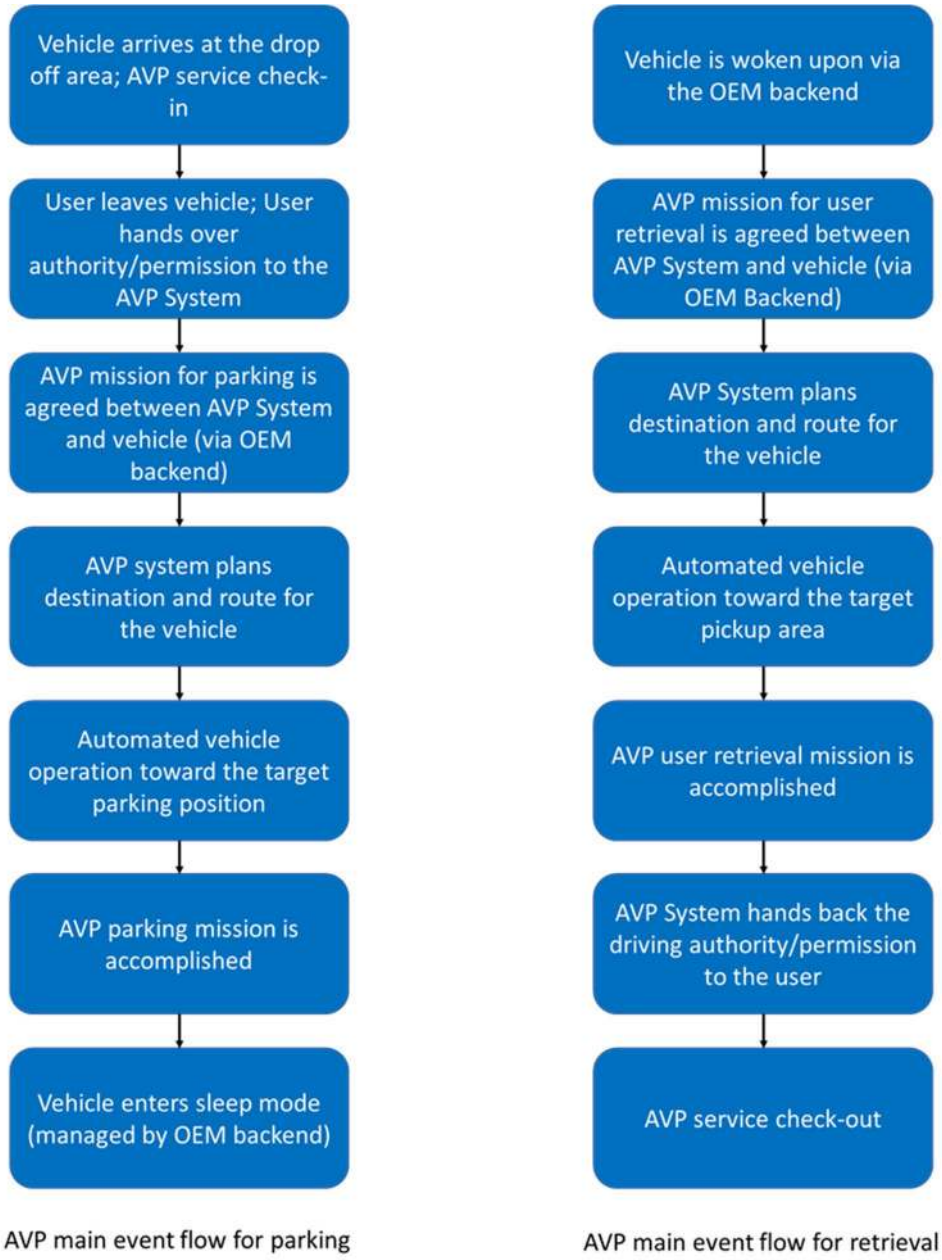


Figure 52: Main event flow of AVP type 2 for vehicle parking and retrieving

- A third solution is that the vehicles which have been assigned a parking space go (autonomously or not) to an identified transitory parking place where a parking operator specialized vehicle takes and tows it to its final parking destination. In this case, only a small itinerary can be followed by the subject vehicle before it is taken in charge by the parking operator. For the leaving of the parking a reverse solution exists and consists for the parking operator to fetch and tow the subject vehicle to one transitory parking space and then leaves the subject vehicle to automatically or not exit the parking.

5.10.4.2 Possible ITS architecture and ITS-S services

The following ITS architectures are appropriate for this use case:

- V2V Autonomous.
- Locally managed via I2V.
- Centrally managed via C2V.

Possible ITS-S Services:

- Autonomous perception guided by parking horizontal marking and vertical signalling, and also a local digital map.
- C-ITS, or/and long-range communication AVP basic services.

5.10.4.3 Possible implementation scenarios

Scenario 1: V2V Autonomous:

It is the first implementation scenario described here above. The automated vehicle uses its autonomous perception capabilities to locate itself on the digital map of the parking it received before. Then it discovers the itinerary to follow to reach its assigned parking space.

Scenario 2: Locally managed via I2V:

The automated vehicle is locally tele-operated by a local parking management system via C-ITS RSUs. Its position can be provided by an augmented GNSS based on local triangulations. The itinerary to follow is provided by the local parking management system (succession of trajectories) until reaching the assigned parking space.

Scenario 3: Centrally managed via C2V:

The automated vehicle is centrally tele-operated by a parking management system (type 2 implementation described here above). The itinerary to follow is provided by the central parking management system (succession of trajectories) until reaching the assigned parking space.

5.10.4.4 Possible implementation scenarios options

ITS-S Scenario 1 option:

A standard "parking digital map" needs to be developed.

ITS-S Scenario 2 option:

Augmented GNSS standardization is required at parking level.

ITS-S Scenario 3 option:

Augmented GNSS standardization is required at parking level.

5.10.5 Void

Figure 53: Void

5.10.6 Other POIs use cases

5.10.6.1 High level description

A not exhaustive list of POIs is provided here below:

- Public/Private transport station/Mobility Hub.
- Energy supply station.
- Restaurant.
- Hotel/Motel.
- Commercial/Shopping centre.
- Rest Area.

- Hospital.
- Pharmacy.
- Police station.
- Caravan/Camping site.
- Stadium, Concert Hall.
- Toilets and Public Amenities.
- Attraction Park.
- Etc.

Most of these POIs have related parking POIs which can be privates or publics.

POI Availability service can be very valuable for mobile users during their travels. This is a "mobility application" type which is subject to be deployed in the scope of C-ITS and ITS. Such ITS/C-ITS application can be supported by Points Of Interest Service (POISs) leading to the specification of Points Of Interest Messages (POIMs).

It is then recommended to specify a generic POIS/POIM approach which can be tailored to accommodate the various types of POIs. A possible generic POIM model is represented in Figure 54.

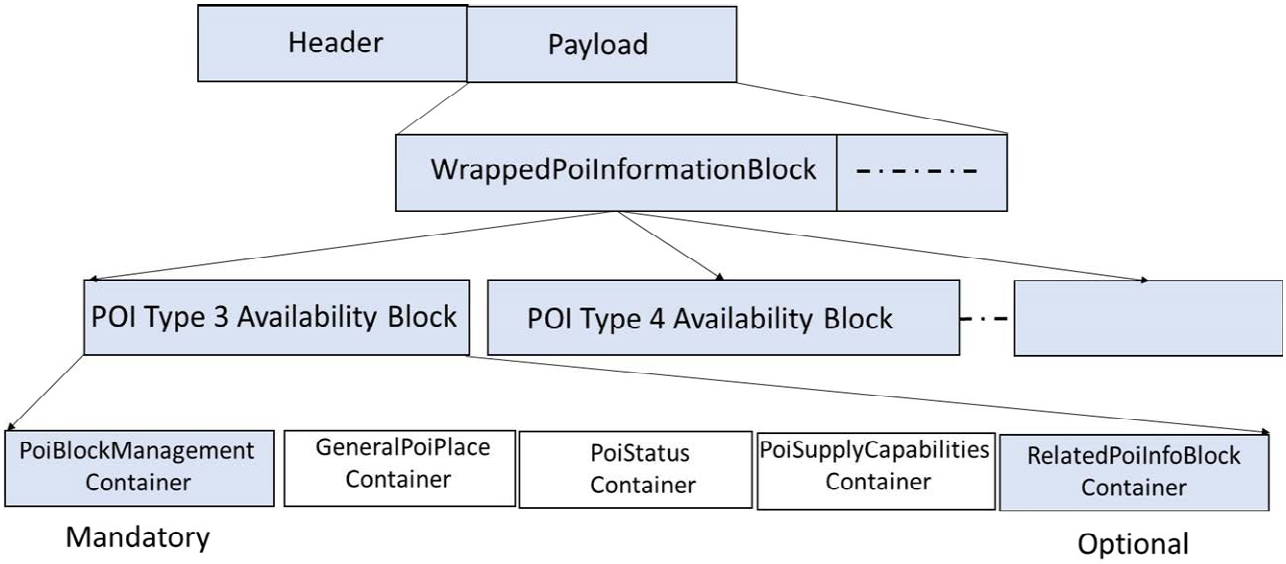


Figure 54: Possible generic POIM model

In such case, mandatory or optional containers dedicated to a particular POI type can be added according to identified POI profiles.

5.10.6.2 Possible ITS architecture and ITS-S services

The two following ITS architectures seem to be the most appropriate ones for this use case:

- I2V Management.
- C2V Management.

Possible ITS-S Services:

- Broadcasted POIS.
- On demand broadcasted (multicast at facilities level) POIS.

- Pushed unicast POIS.
- On demand POS (Pull).

5.10.6.3 Possible implementation scenarios

Scenario 1: I2V Management:

Cooperative RSU signals the presence ahead of different types of POIs and provides real time information about the availability of provided services (POIs and related POIs services). Possibility to reserve services and payment conditions are also optionally available.

Receiving vehicles may then reserve a POI service and related POI service(s) via provided link(s).

Scenario 2: C2V Management:

A central POIs management system informs approaching vehicles of the presence of different types of POIs and provide real time information about the availability of provided services (POI and related POIs services). The POI management system may push the information to road users which have contracted the service, or the road user may pull the information from the POI management system.

Receiving vehicles may then reserve a POI service and related POI service(s) via provided links.

5.10.6.4 Implementation scenario flow diagram

Flow diagram model 15 in Figure 51 is applicable to this use case.

5.10.6.5 Possible implementation scenarios options

Scenario 1: I2V Management:

- A RSU may constantly broadcast information at a specified periodic value to approaching vehicles.
- A RSU may constantly broadcast generic information at a specific specified periodic value to approaching vehicles and add information upon received POIM requests (multicast mode at facilities layer).
- A RSU may only broadcast information upon request of approaching vehicles.

Scenario 2: C2V Management:

- A central system may push the POI availability information to their users on contractual basis or according to customized algorithms based on received information.
- A central system may respond to customers' specific demand related to POIs services availability (customer pull).

In both cases, POIM and POIM Request messages are necessary.

5.11 Agricultural specific application

5.11.1 ITS service introduction

Tractors and machinery for agricultural and forestry are occasionally needing to use the public terrestrial network and share it with other vehicles. Such agricultural and forestry vehicles are generally huge and slow and may present some risk when moving ahead nearby or in public vehicles' networks.

Moreover, when being at work in fields and forests, several of them may be cooperating to achieve a particular task leading to coordinate their manoeuvres to ensure a safe evolution respecting the task privacy.

Then, they can take profit of the C-ITS/ITS technology and relevant existing standards and in some cases could require the development of new standards.

5.11.2 Task data exchange use case

5.11.2.1 High level description

A job for an agricultural machine is usually described with a task data standardized within ISO 11783-10 [i.17]. Within a ISO XML file relevant data (location, field boundary, guidance references lines, apply rate and others) is stored to define what to do on a field. Working on a field with multiple vehicles is much more efficient if this task data is available for all machines.

5.11.2.2 Possible ITS architecture and ITS-S services

Any vehicle working on a field will offer relevant data of his job (defined within a task) to any other vehicle willing to collaborate. To ensure privacy of task relevant data only after joining a dedicated working group encryption of the data is possible.

- Consequently, in the present document, only V2V cooperation is considered.

Dedicated ITS-S services need to be specified.

5.11.2.3 Possible implementation scenarios options

Because agricultural machines usually working in rural areas, communication infrastructure is not always available. Therefore, a P2P approach will be used. That means every tractor with task data relevant for the job will offer this data to share with anyone willing to work at the same job.

5.11.3 Geo referenced data exchange use case

5.11.3.1 High level description

Working on a field is usually logged based on position data. Besides that, also control of the implement attached to an agricultural machine is often controlled by geo referenced data. This means that on the one hand the amount of applied goods or working intensity (fertilizer, seeding, depth of cultivator, etc.) is defined within a prescription map or/and the area, which is already worked, called coverage map, is stored. Based on this data the amount of applied goods, working state of tools is controlled or even stopped if an area would be worked twice. To work with more than one machine on a field exchange of this georeferenced data is required to be highly efficient. Other than task data, which is usually defined once before the job begins, geo referenced data is gathered while working (coverage data) or could be modify while working (prescription data).

5.11.3.2 Possible ITS architecture and ITS-S services

Any vehicle working on a field will offer relevant georeferenced data of his job to any other vehicle willing to collaborate. To ensure privacy of task relevant data only after joining a dedicated working group encryption of the data is possible. To ensure to have an equal revision of the map data all vehicles will share this data based on a distributed revision management system, enabling every member of the working group to identify status of his mapped data an asking for relevant updates from other to be up-to-dated.

Several ITS architectures are possible to support this use case, especially for the provisioning of geo references and of the local map data.

Dedicated ITS-S services need to be specified.

5.11.3.3 Possible implementation scenarios options

Because agricultural machines usually working in rural areas, communication infrastructure is not always available. Therefore, a P2P approach will be used. That means every tractor with task data relevant for the job will offer this data to share with anyone willing to work at the same job.

5.11.4 Agricultural platooning use case

5.11.4.1 High level description

Agricultural vehicles are often working together in proximity. Typically, this happens in unloading situation where one machine unload goods to a transport vehicle or when two machines doing the same practice, like cultivating the field. To avoid collisions and/or lose of goods during unloading automation of steering and/or speed control is highly welcome within this kind of situation. In difference to automotive platooning ag machinery typically drives next to each other with variable lateral offset and only in few situations (starting a field) behind each other with a fixed lateral offset. Beside that the position offset is based on the desired hit point of the unloading set point and will move to ensure optimal usage of given transport volume.

5.11.4.2 Possible ITS architecture and ITS-S services

The vehicle unloading goods or be in the front position will send desired position for vehicle receiving the goods or following. Based on the amount of unloaded goods the leading vehicle can notch the following vehicle to optimize use of the given transport volume:

- Consequently, in the present document, only V2V cooperation is considered.

Dedicated ITS-S services need to be specified.

5.11.4.3 Possible implementation scenarios options

After being manoeuvred near the leading vehicle the operator of the following vehicle can hand over to automatic. The automatic will stay active as long as the leader or follower will decline automation, or the follower will take over manual control again.

5.11.5 In field safety use case

5.11.5.1 High level description

Agricultural vehicles are often working together in proximity. Also not only being responsible for driving the vehicle but also for taking care for the working process means that the operator could be quite busy. Therefor there is always a certain danger of colliding with other vehicles being in the same field. This means warning the operator of a vehicle that there is another vehicle in proximity moving towards each other could help to avoid dangerous situation.

5.11.5.2 Possible ITS architecture and ITS-S services

Every vehicle will share his position, speed and direction of movement using some agricultural awareness message if judged appropriate.

Consequently, in the present document, only V2V cooperation is considered.

Dedicated ITS-S services need to be specified if existing ones (e.g. CAS) are not retained as appropriate to support such use case.

5.11.5.3 Possible implementation scenarios options

Receiving this kind of messages will enable every vehicle to judge if there are other participants moving around in proximity, and direction that a collision could be possible. Based on this a warning message could be display to the operator to make him aware of this situation.

5.11.6 Agricultural work awareness use case

5.11.6.1 High level description

Agricultural vehicles are often working next to public roads. This could affect in certain situation road users by dust or particles thrown into the air by agricultural working process. To enable road users to reduce speed or other measures to react on potential harmful situation the agriculture machine could sent on regular interval an awareness message enabling road users to judge by their own if that is from relevance for them.

5.11.6.2 Possible ITS architecture and ITS-S services

Every vehicle in the field will share his position, speed and direction of movement using some agricultural awareness message or an extension of the CAM to agricultural vehicle types.

Consequently, in the present document version, only V2V cooperation is considered.

Dedicated ITS-S services need to be specified if existing ones (e.g. CAS, etc.) are not retained as appropriate to support such use case.

5.11.6.3 Possible implementation scenarios options

Receiving this kind of messages will enable every vehicle to judge if there is a general potential of danger coming from this vehicle not being on the road and if that could be verified by other sensors (e.g. camera detecting dust). Based on that the operator could be warned or the automation system can react on this.

5.12 Integration of C-ITS in Public Warning System

5.12.1 ITS service introduction

Natural disasters and the thousands of casualties they usually cause have often made the headlines in the past years. A milestone event in this field was the Indian Ocean tsunami that happened in December 2004. This event raised the question of how to improve the protection of the population and prevent so many deaths. In fact, the main answer relies in the fast distribution of the information: information about the best behaviour to adopt in case of a disaster, and more importantly, information about the imminent arrival of a disaster and evacuation orders. Therefore, many actions have been started by the public authorities to reduce the damages and the number of casualties.

When a disaster occurs, the national or local authorities need to provide information to the citizens regarding the impact of the disaster including precautions that need to be taken by the citizens to increase their safety (see ETSI TS 102 182 [i.18]). The information provided by the authorities to the citizens is delivered to the area(s) where the incident happens, that can be limited to a small area(s) and up to the whole country. Since its Release 8, 3GPP has started the specification of a Public Warning System (see ETSI TS 122 268 [i.5]) allowing for direct warnings to be sent from national or local authorities to mobile users on devices capable of displaying a text-based and language-dependent Warning Notification. However, the combination of different technologies, including IoT and C-ITS communication means, could improve drastically the efficiency of the alerting global system by increasing the coverage of the existing network to reach more people in a faster way. People in vehicles usually do not watch TV and may not be listening to the radio.

The information in next clauses is derived from use case PWS1 in ETSI TR 103 582 [i.8].

5.12.2 Natural disaster alert use case

5.12.2.1 High level description

The use case begins when a disaster happens, see ETSI TS 122 268 [i.5] and ETSI TR 103 582 [i.8]:

1) Local Emergency Management Authority (LEMA) wants to inform the citizens about the emergency/disaster.

2) The authority server(s) connected directly to an IoT/Road operator network or to a public communication network sends the information instantaneously with no delay to the service platforms responsible for the designated areas. These networks ensure secure communications where no intruders can provide false public warning information via the network.

3) The devices and platforms receiving the public warning information forwards it to other IoT devices or ITS-Stations based on their capabilities. A V-ITS-S or R-ITS-S receiving the message can also forward it to neighbouring ITS-S (multi-hop forwarding). The warning passing through the IoT network could also reach public connected screens (billboards, bus stop displays, etc.).

The V-ITS-S translates the received message into other notification formats towards the vehicle driver. Examples include the display of the messages on the on-board screen, or even speak out the message, triggering of alarms/buzzers, blinking of lamp/led, etc. No acknowledgment is required for receiving these messages.

Figure 55 illustrates the natural disaster alert use case.

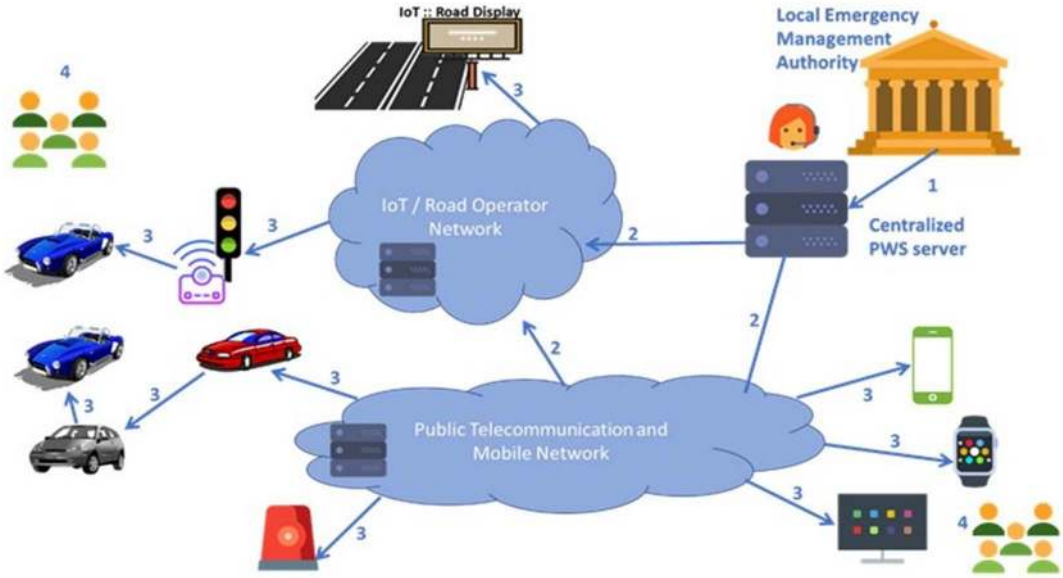


Figure 55: Natural Disaster Alert use case

5.12.2.2 Possible ITS architecture and ITS-S services

Local Emergency Management Authority (LEMA): In case of PWS, it specifies the area/location where the information should be sent. The method for communicating the information as language, sound, light, etc. can be provided based on regulatory requirements.

Communication networks/ service provider: connecting the authority server capable of transporting the public warning information instantaneously to all the devices (mobile phones, IoT, ITS-S) in the designated areas, ensuring the information needed is up to date and in-line with the regulation and authority preferences, as well as compatibility between the connected communication network and the devices. It provides a reliable, consistent, and secure means for transporting the information.

Receiving device: This is for example a V-ITS-S. It can detect duplicated PWS messages and discarding them. It presents the public warning information to the driver, conveying one or more types of media (text, voice, sounds, light alarms). But, when possible, it relays the information in an ad-hoc manner to other vehicles nearby. The information can be encapsulated into an extended DENM or be carried as a payload in a dedicated new C-ITS message.

5.12.2.3 Use case analysis

This use case introduces V2X communications as another media to propagate alerts in the Public Warning Systems. This use case requires that ITS-S can receive and decode the alert (either from the public network or from the road operator network), present it to the user of the ITS-S and when possible, transfer the message as a multi-hop message to neighbouring ITS-S using an extended DENM or a dedicated C-ITS message. The impacts would be on the infrastructure e.g. road operators, city operators, system integrators, but also on the applications and services provided by on-board units.

V2X communications, and more particularly V2V communications, are interesting in this case because they provide techniques that can work even during severe conditions of disaster situations when the network infrastructure is damaged. For example, the natural disasters evaluated in WMAPS 2011 paper [i.19] are earthquake and flash flooding, together with sabotage scenarios such as power outage and network random failures. It is sufficient that one ITS-S receives the alert: it is then capable to distribute the information to other ITS-S and reach a higher number of citizen road users.

5.13 Void

6 Conclusions

6.1 Introduction

Clause 6.2 provides a summary of possible impacts on existing ETSI ITS standards, as listed in ETSI TR 101 607 [i.21], which are currently available in the published Release 1 set, considering the extension of the basic set of ITS applications which are proposed in the present document. Moreover, in clause 6.3, a summary of the proposed Release 2 and beyond basic set ITS applications and its associated use cases is provided.

6.2 Impacts on Release 2 standards

Optional containers, new Data Frames and new Data Elements could be added in Release 2 messages (version 2). Possible evolutions can be provided in possible implementation scenarios at ITS applications and use cases level.

6.3 Summary of the Release 2 basic set of ITS applications and associated use cases

The present document does not include an exhaustive list of ITS applications and use cases which need to be addressed for the deployment of automated vehicles. It is only a first proposal which can be extended according to new emerging needs. Table 1 provides a summary of services/applications and use cases which have been considered.

NOTE: An application/use case may be developed to support independently or simultaneously several services. For example, increasing the traffic fluidity (traffic management) may have an impact on the reduction of environmental pollution (environmental protection).

Table 1: Summary of the basic set of applications and its associated use cases

ITS Services	Basic Set of ITS Applications and associated use cases	Main targeted ITS Service category	Comments
Partial and high automation	Hazardous location notification - vehicle assistance	User road safety	
	Cooperative Adaptive Cruise Control (C-ACC)	Traffic Management	Part of longitudinal automation
	C-ACC string	Traffic Management	
	Cooperative Adaptive Emergency Brake System (C-AEBS)	User road safety	Automated action on the vehicle secondary braking system
	Advanced Pre-crash sensing	User road safety	Collision impacts mitigation
	Cooperative Active Lane Keeping (C-ALK)	User road safety	Part of longitudinal automation
	Cooperative Intelligent Speed Adaptation (C-ISA)	User road safety and traffic management	See CEN Contextual Speed Adaptation
	Infrastructure support for ADS	User road safety and traffic management.	
CCAM Augmented Perception	Perception of a non-connected vehicle at an intersection	User road safety	
	Perception of a non-connected stationary vehicle at the top of a slop	User road safety	
	Advanced non-connected slow vehicle warning	User road safety	
	V2V/I2V non-connected VRU perception	User road safety	
	Perception into a tunnel		
	Perception of traffic when merging		
Vehicles' coordination	Cooperative Lane Merging (CLM)	User road safety and local traffic management	
	Cooperative Lane Change (CLC)	User road safety and local traffic management	
	Advanced Cooperative ACC (string) (AC-ACC S)	Local traffic management	
	Truck platooning management	Traffic management and environmental protection	
	Toll Plaza Guidance		
Multi-Car Collision avoidance	Advanced signal violation warning	User road safety	
	Advanced wrong way driving warning	User road safety	
Intersection crossing assist	Advanced Intersection Collision Warning (AICW)		
	Not controlled intersection	User road safety and local traffic management	
	Traffic light-controlled intersection - Priority vehicles management	User road safety and local traffic management	
	Optimized traffic light information from V2I	User road safety and local traffic management	
	Automated GLOSA (A-GLOSA)	User road safety and local traffic management	
	Automated GLOSA with negotiation	User road safety and local traffic management	
	Railway level crossing	User road safety	
	Other intersection/area crossing	User road safety	
	Advanced Slow Vehicle Warning (ASVW)	Traffic management	May include VRUs vehicles

ITS Services	Basic Set of ITS Applications and associated use cases	Main targeted ITS Service category	Comments
advanced warning and information, VRUs protection	Filtering motorcycle	VRU road safety	
	Overtaking motorcycle	VRU road safety	
	Overtaking motorcycle and turning vehicle	VRU road safety	
	Turning vehicle with PTW in the blind spot	VRU road safety	
	VRU presence awareness	VRU road safety	
	VRU collision warning	VRU road safety	
	VRU Brake and Steering intervention	VRU road safety	
	VRU safety beacon	VRU road safety	
	VRU complex interaction	VRU road safety	
	Interactive VRU crossing	VRU road safety	
	Extended cluster management	VRU road safety	
Dynamic Navigation	Detour Management	Local & Global traffic management	Can be used for environmental protection to reduce the traffic pollution in some protected areas
Contextual, dedicated corridor management	Corridor dedicated to an emergency vehicle, rescue/recovery, prioritized/safety vehicle	Citizens' protection, local & global traffic management	
	Corridor dedicated to other priority vehicles	Local and global traffic management	Public transport/car' pooling for environmental protection. Winter interventions to maintain the road infrastructure operational
	Hard Shoulder Running	Local and global traffic management	
	Roadwork warning (long-term)	Local and global traffic management	Roads access restrictions. Related to detour management
POIs Management	Parking Availability Service	Mobility assistance	Can be considered as a generic example for other types of POIs availability services
	Automated Valet Parking	Mobility assistance	
	Other POIs	Mobility assistance	POIs related to the vehicle' operation and users' mobility
Agricultural specific use cases	Task data exchange	Mobility assistance and safety	
	Geo referenced data exchange	Mobility assistance and safety	
	Agricultural platooning	Mobility assistance and safety	Synchronization between several agricultural vehicles according to tasks to achieve
	In-field safety	Mobility assistance and safety	
	Agricultural work awareness	Mobility assistance and road safety	
Integration of C-ITS in Public Warning System	Natural disaster alert	Mobility assistance and citizen protection	Related to emergency corridor

From the analysis of these applications and use cases, necessary extensions to the existing ITS standards (e.g. CAM, DENM, VAM, etc.), and to the ones under development (CPM) have been identified. New standards may need to be developed as well but further investigations are needed.

Annex A: Bibliography

- M. Wetterwald, C. Bonnet, D. Câmara, S. Grazzini, J. Fenwick, X. Ladjointe, J.-L. Fondere: "Integrating Future Communication Technologies for the Downstream Component of Public Warning Systems", International Journal on Advances in Networks and Services, 2012, vol. 5, nr 3&4, pp. 189-197.

History

Version	Date	Status
V1.1.1	June 2009	Publication
V2.1.1	April 2024	Publication
V2.2.1	September 2026	Publication