ETSI TS 132 362 V15.0.0 (2018-07)



**Digital cellular telecommunications system (Phase 2+) (GSM);
Universal Mobile Telecommunications System (UMTS);
LTE;
Telecommunication management;
Entry Point (EP) Integration Reference Point (IRP);
Information Service (IS)
(3GPP TS 32.362 version 15.0.0 Release 15)**



Reference
RTS/TSGS-0532362vf00

Keywords
GSM,LTE,UMTS

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

The present document can be downloaded from:
http://www.etsi.org/standards-search

The present document may be made available in electronic versions and/or in print. The content of any electronic and/or print versions of the present document shall not be modified without the prior written authorization of ETSI. In case of any existing or perceived difference in contents between such versions and/or in print, the only prevailing document is the print of the Portable Document Format (PDF) version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status.
Information on the current status of this and other ETSI documents is available at
https://portal.etsi.org/TB/ETSIDeliverableStatus.aspx

If you find errors in the present document, please send your comment to one of the following services:
https://portal.etsi.org/People/CommiteeSupportStaff.aspx

Copyright Notification

No part may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm except as authorized by written permission of ETSI.
The content of the PDF version shall not be modified without the written authorization of ETSI.
The copyright and the foregoing restriction extend to reproduction in all media.

© ETSI 2018.
All rights reserved.

DECT™, **PLUGTESTS**™, **UMTS**™ and the ETSI logo are trademarks of ETSI registered for the benefit of its Members.
3GPP™ and **LTE**™ are trademarks of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.
oneM2M logo is protected for the benefit of its Members.
GSM® and the GSM logo are trademarks registered and owned by the GSM Association.

Intellectual Property Rights

Essential patents

IPRs essential or potentially essential to normative deliverables may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (https://ipr.etsi.org/).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Trademarks

The present document may include trademarks and/or tradenames which are asserted and/or registered by their owners. ETSI claims no ownership of these except for any which are indicated as being the property of ETSI, and conveys no right to use or reproduce any trademark and/or tradename. Mention of those trademarks in the present document does not constitute an endorsement by ETSI of products, services or organizations associated with those trademarks.

Foreword

This Technical Specification (TS) has been produced by ETSI 3rd Generation Partnership Project (3GPP).

The present document may refer to technical specifications or reports using their 3GPP identities, UMTS identities or GSM identities. These should be interpreted as being references to the corresponding ETSI deliverables.

The cross reference between GSM, UMTS, 3GPP and ETSI identities can be found under http://webapp.etsi.org/key/queryform.asp.

Modal verbs terminology

In the present document "**shall**", "**shall not**", "**should**", "**should not**", "**may**", "**need not**", "**will**", "**will not**", "**can**" and "**cannot**" are to be interpreted as described in clause 3.2 of the ETSI Drafting Rules (Verbal forms for the expression of provisions).

"**must**" and "**must not**" are **NOT** allowed in ETSI deliverables except when used in direct citation.

Contents

Intellectual Property Rights 2
Foreword 2
Modal verbs terminology 2
Foreword 5
Introduction 5
1 Scope 6
2 References 6
3 Definitions and abbreviations 6
3.1 Definitions 6
3.2 Abbreviations 7
4 System Overview 7
4.1 System Context 7
4.2 Compliance rules 7
5 Information Object Classes 8
5.1 Imported information entities and local labels 8
5.2 Class diagram 8
5.2.1 Attributes and relationships 8
5.2.2 Inheritance 8
5.3 Information Object Class definitions 8
5.3.1 EPIRP 8
5.3.1.1 Definition 8
5.3.1.2 Attributes 9
6 Interface definition 9
6.1 Class diagram representing interfaces 9
6.2 Generic rules 9
6.3 Interface EPIRPOperations (M) 9
6.3.1 Operation getIRPOutline (M) 9
6.3.1.1 Definition 9
6.3.1.2 Input parameters 10
6.3.1.3 Output parameters 10
6.3.1.4 Pre-condition 10
6.3.1.5 Post-condition 10
6.3.1.6 Exceptions 11
6.3.2 Operation getIRPReference (M) 11
6.3.2.1 Definition 11
6.3.2.2 Input parameters 11
6.3.2.3 Output parameters 11
6.3.2.4 Pre-condition 11
6.3.2.5 Post-condition 11
6.3.2.6 Exceptions 12
6.3.3 Operation releaseIRPReference (M) 12
6.3.3.1 Definition 12
6.3.3.2 Input parameters 12
6.3.3.3 Output parameters 12
6.3.3.4 Pre-condition 12
6.3.3.5 Post-condition 12
6.3.3.6 Exceptions 12
6.4 Interface EPIRPNotifications (M) 13
6.4.1 Notification notifyIRPInfoChanges (M) 13
6.4.1.1 Definition 13
6.4.1.2 Input Parameters 13
6.4.1.3 Triggering Event 13

6.4.1.3.1 From-state 13
6.4.1.3.2 To-state 13

Annex A (informative): Change history 14

History 15

Foreword

This Technical Specification has been produced by the 3rd Generation Partnership Project (3GPP).

The contents of the present document are subject to continuing work within the TSG and may change following formal TSG approval. Should the TSG modify the contents of the present document, it will be re-released by the TSG with an identifying change of release date and an increase in version number as follows:

Version x.y.z

where:

- x the first digit:
  - 1 presented to TSG for information;
  - 2 presented to TSG for approval;
  - 3 or greater indicates TSG approved document under change control.
- y the second digit is incremented for all changes of substance, i.e. technical enhancements, corrections, updates, etc.
- z the third digit is incremented when editorial only changes have been incorporated in the document.

Introduction

The present document is part of a TS-family covering the 3rd Generation Partnership Project: Technical Specification Group Services and System Aspects; Telecommunication management, as identified below:

32.361: "Entry Point (EP) Integration Reference Point (IRP): Requirements".

32.362: "Entry Point (EP) Integration Reference Point (IRP): Information Service (IS)".

32.366: "Entry Point (EP) Integration Reference Point (IRP); Solution Set (SS) defintions".

The present document is part of a TS-family defining the Telecommunication Management (TM) of 3G systems.

The TM principles are described in 3GPP TS 32.101 [1]. The TM architecture is described in 3GPP TS 32.102 [2].

The other specifications define the interface (Itf-N) between the managing system (manager), which is in general the Network Manager (NM) and the managed system (agent), which is either an Element Manager (EM) or the managed NE itself. The Itf-N is composed of a number of Integration Reference Points (IRPs) defining the information in the agent that is visible for the manager, the operations that the manager may perform on this information and the notifications that are sent from the agent to the manager. EP (Entry Point) IRP is one of these IRPs with special function.

It is difficult for an NM to discover all IRPs in the environment that there are several managed systems and/or if there are multiple IRPs related to each managed systems. This Entry Point is proposed to provide a convenient mechanism for NM to discover the managed systems and their related IRPs.

1 Scope

The present document defines the Information Service (IS) part of the Entry Point IRP (EPIRP).
It describes the semantics of the information and the interactions visible across Itf-N in a protocol independent way. The information is specified by means of Information Object Classes (IOCs) and SupportIOCs, and the interactions by means of operations and notifications. The present document does not specify the syntax (encoding) of the information.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies. In the case of a reference to a 3GPP document (including a GSM document), a non-specific reference implicitly refers to the latest version of that document *in the same Release as the present document.*

[1] 3GPP TS 32.101: "Telecommunication management; Principles and high level requirements".

[2] 3GPP TS 32.102: "Telecommunication management; Architecture".

[3] 3GPP TS 32.401: "Telecommunication management; Performance Management (PM); Concept and requirements".

[4] 3GPP TS 32.111-1: "Telecommunication management; Fault management; Part 1: 3G fault management requirements".

[5] 3GPP TS 32.302: "Telecommunication management; Configuration Management (CM); Notification Integration Reference Point (IRP): Information Service (IS)".

[6] 3GPP TS 32.361: "Telecommunication management; Entry Point (EP) Integration Reference Point (IRP): Requirements".

[7] 3GPP TS 32.622: "Telecommunication management; Configuration Management (CM); Generic network resources Integration Reference Point (IRP): Network Resource Model (NRM)".

[8] 3GPP TS 32.312: "Telecommunication management; Generic Integration Reference Point (IRP) management: Information Service (IS)".

[9] 3GPP TS 32.311: "Telecommunication management; Generic Integration Reference Point (IRP) management: Requirements".

[10] 3GPP TS 32.150: "Telecommunication management; Integration Reference Point (IRP) Concept and definitions".

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions defined in 3GPP TS 32.101 [1], 32.102 [2], 32.150 [10] 32.361 [6] and the following apply.

IRPVersion: See 3GPP TS 32.311 [9].

SupportIOC: See 3GPP TS 32.150 [10].

3.2 Abbreviations

For the purposes of the present document, the following abbreviations apply:

CORBA	Common Object Request Broker Architecture
DN	Distinguished Name
EM	Element Manager
EP	Entry Point
EPIRP	Entry Point IRP
IRP	Integration Reference Point
IOC	Information Object Class
IS	Information Service
NE	Network Element
NM	Network Manager
NRM	Network Resource Model
PM	Performance Management

4 System Overview

4.1 System Context

The general definition of the System Context for the present IRP is found in 3GPP TS 32.150 [10] subclause 4.7.

In addition, the set of related IRP(s) relevant to the present IRP is shown in the two diagrams below.

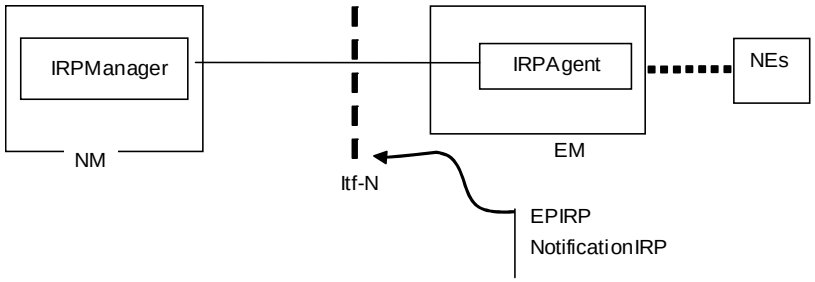


Figure 4.1: System Context A

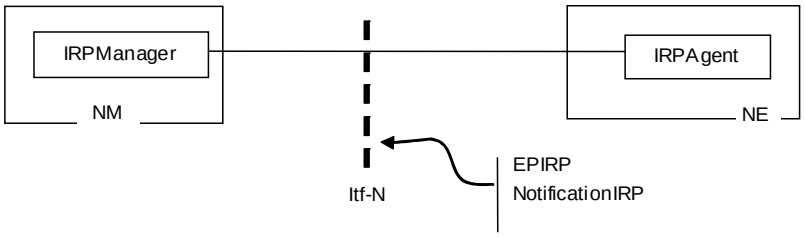


Figure 4.2: System Context B

4.2 Compliance rules

For general definitions of compliance rules related to qualifiers (Mandatory/Optional/Conditional) for *operations*, *notifications and parameters* (of operations and notifications) please refer to 3GPP TS 32.150 [10] .

5 Information Object Classes

5.1 Imported information entities and local labels

Label reference	Local label
3GPP TS 32.622 [7], information object class, IRPAgent	IRPAgent
3GPP TS 32.622 [7], information attribute, systemDN	systemDN
3GPP TS 32.312 [8], SupportIOC, ManagedGenericIRP	ManagedGenericIRP
3GPP TS 32.312 [8], information attribute, iRPId	iRPId


5.2 Class diagram

5.2.1 Attributes and relationships

This clause depicts the set of classes (e.g. IOCs) that encapsulates the information relevant for this IRP. This clause provides an overview of the relationships between relevant classes in UML. Subsequent clauses provide more detailed specification of various aspects of these classes.



5.2.2 Inheritance

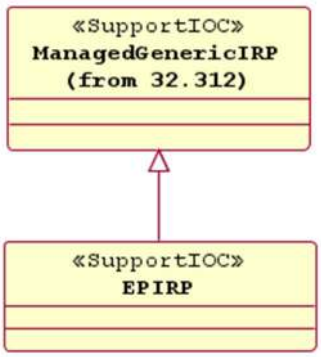

5.3 Information Object Class definitions

5.3.1 EPIRP

5.3.1.1 Definition

The EPIRP SupportIOC is used as an initial access point to the managed systems. This interface implements the entry point management capabilities defined by the present document. EPIRP inherits from the ManagedGenericIRP SupportIOC specified in 3GPP TS 32.312 [8]. How the NM gets the IRP Reference of the EPIRP is outside the scope of the present document.


5.3.1.2 Attributes

The EPIRP does not have any own attributes, only those inherited from ManagedGenericIRP.

6 Interface definition

6.1 Class diagram representing interfaces

The following diagram depicts the interfaces of EPIRPwith its corresponding operations and notifications.

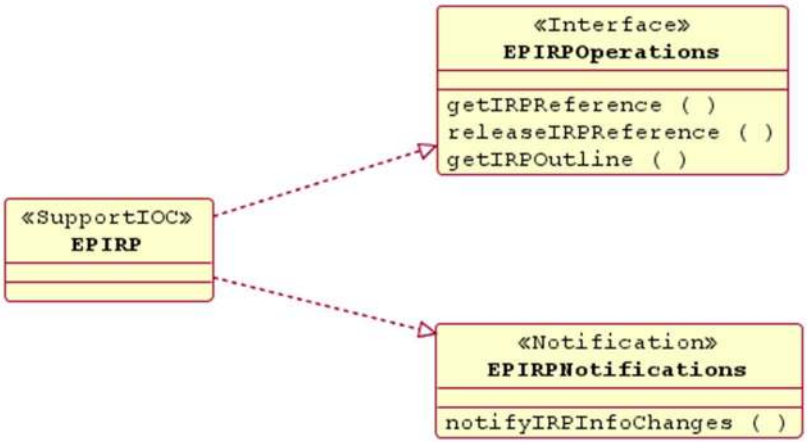

6.2 Generic rules

- **Rule 1:** each operation with at least one input parameter supports a pre-condition valid_input_parameter which indicates that all input parameters shall be valid with regards to their information type. Additionally, each such operation supports an exception operation_failed_invalid_input_parameter which is raised when pre-condition valid_input_parameter is false. The exception has the same entry and exit state.

- **Rule 2:** Each operation with at least one optional input parameter supports a set of pre-conditions supported_optional_input_parameter_xxx where "xxx" is the name of the optional input parameter and the pre-condition indicates that the operation supports the named optional input parameter. Additionally, each such operation supports an exception operation_failed_unsupported_optional_input_parameter_xxx which is raised when (a) the pre-condition supported_optional_input_parameter_xxx is false and (b) the named optional input parameter is carrying information. The exception has the same entry and exit state.

- **Rule 3:** each operation shall support a generic exception operation_failed_internal_problem that is raised when an internal problem occurs and that the operation cannot be completed. The exception has the same entry and exit state.

6.3 Interface EPIRPOperations (M)

6.3.1 Operation getIRPOutline (M)

6.3.1.1 Definition

The IRPManager uses this operation to request the EPIRPto return the outline information of the supported IRPs. IRPManager could set a filter constraint on the returned information according to specific requirements.

The EPIRP shall return the outline information of all the IRPs, including itself and other EPIRP instances that it knows, supported by the IRPAgent that contains the EPIRP.

The EPIRP may additionally return the outline information of all the IRPs, including EPIRP instances, supported by other IRPAgents.

6.3.1.2 Input parameters

Parameter Name	Qualifier	Information Type	Comment
iRPVersion	M	--	It specifies an iRPVersion that IRPAgent shall use when constructing its output parameter supportedIRPList. If this parameter is absent, then all the supported iRPVersions shall be used to construct its supportedIRPList.

6.3.1.3 Output parameters

Parameter Name	Qualifier	Matching Information	Comment
supportedIRPList	M	A sequence of elements. Each element contains: - systemDN (M) - iRPList (M) where iRPList is a sequence of IRPAgentelements. Each element is: - rDN (M) - iRPVersionSet (M) - iRPManagementScope (O)	This parameter will return a sequence of elements. The systemDN (defined in [7]) is the Distinguished Name (DN) of the that contains the IIRPAgentRPs identified by the related iRPList. Note that this may or may not be tEPIRPhe same IRPAgent that contained the (that is responding to this operation). The rDN (relative Distinguished Name) sub-parameter contains the class name and the iRPId of the IRP instance. The iRPId (defined in [8]) is the identifier of a specific Interface IRP (e.g. AlarmIRP 32.111-1 [4], PMIRP 32.401 [3]) contained by the IRPAgent identified by the systemDN sub-parameter. The iRPVersionSet (defined in [8]) is the set of iRPVersions supported by the IRP identified by the rDN sub-parameter. iRPVersion, defined in [9] (see note), is used to identify a particular IRP Solution Set specification. The iRPManagementScope sub-parameter, when present, shall carry a list of the DNs that identify the sub trees under the management of the IRP. This parameter, if present, shall contain no information if the IRP is EPIRP. In case there is no supported IRP, this sequence shall contain no element. The operation is considered successful.
Status	M	ENUM (OperationSucceeded, OperationFailed)	An operation may fail because of a specified or unspecified reason.

NOTE: Each iRPVersion number is a version supported by the identified Interface IRP, not a version of an NRM IRP.

6.3.1.4 Pre-condition

The precondition must hold true before the operation is invoked.

iRPVersionIsValid

Assertion Name	Definition
iRPVersionIsValid	The iRPVersion specified is valid.

6.3.1.5 Post-condition

None.

6.3.1.6 Exceptions

Exception Name	Definition
invalidIRPVersion	**Condition**: iRPVersionIsValid = FALSE **Returned information**: The response parameter is returned **Exit state**: Entry state
operationFailed	**Condition:** Pre-condition is false or post-condition is false **Returned Information:** The output parameter status **Exit state:** Entry state

6.3.2 Operation getIRPReference (M)

6.3.2.1 Definition

The IRPManager uses this operation to request the EPIRP to return an IRP Reference for a specific version of a specific IRP, including EPIRP.

Whether IRP References are statically or dynamically allocated is outside the scope of the present document.

6.3.2.2 Input parameters

Parameter Name	Qualifier	Information Type	Comment
managerIdentifier	M	--	It carries the identifier of an IRPManager.
systemDN	M	--	It carries the systemDN (defined in [7]) of the IRPAgent containing the specific Interface IRP YyyIRP (e.g. AlarmIRP, PMIRP) needed by the IRPManager.
rDN	M	--	It carries the class name and the iRPId of the IRP instance. The systemDN (above) and this rDN form the DN of the IRP instance whose iRPReference is requested by the IRPManager.

6.3.2.3 Output parameters

Parameter Name	Qualifier	Matching Information	Comment
iRPReference	M	--	This parameter carries an IRP Reference for the specified iRPVersion of the specified IRP.
status	M	ENUM (OperationSucceeded, OperationFailed)	An operation may fail because of a specified or unspecified reason.

6.3.2.4 Pre-condition

requestedParametersAreValid

Assertion Name	Definition
requestedParametersAreValid	The systemDN and rDN are valid and their combination is valid in a way that the EPIRP is aware of the IRP instance and its associated iRPReference.

6.3.2.5 Post-condition

None.

6.3.2.6 Exceptions

Exception Name	Definition
invalidRequestedParameters	**Condition**: requestParametersAreValid = FALSE **Returned information**: The response parameter and detailed reason are returned **Exit state**: Entry state
operationFailed	**Condition:** Pre-condition is false or post-condition is false **Returned Information:** The output parameter status. **Exit state:** Entry state

6.3.3 Operation releaseIRPReference (M)

6.3.3.1 Definition

The IRPManager uses this operation to request the IRPAgent to release a specific iRPReference. Whether the iRPReference is really released or not in the IRPAgent is outside the scope of the present document.

6.3.3.2 Input parameters

Parameter Name	Qualifier	Information Type	Comment
managerIdentifier	M	--	It carries the identifier of an IRPManager.
iRPReference	M	--	It carries the specific iRPReference no longer needed by the IRPManager.

6.3.3.3 Output parameters

Parameter Name	Qualifier	Matching Information	Comment
status	M	ENUM (OperationSucceeded, OperationFailed)	An operation may fail because of a specified or unspecified reason.

6.3.3.4 Pre-condition

The precondition must hold true before the operation is invoked.

validIRPReference

Assertion Name	Definition
validIRPReference	The iRPReference is valid.

6.3.3.5 Post-condition

None.

6.3.3.6 Exceptions

Exception Name	Definition
unknownIRPReference	**Condition**: validIRPReference = FALSE **Returned information**: The response parameter is returned **Exit state**: Entry state
operationFailed	**Condition:** Pre-condition is false or post-condition is false **Returned Information:** The output parameter status **Exit state:** Entry state

6.4 Interface EPIRPNotifications (M)

6.4.1 Notification notifyIRPInfoChanges (M)

6.4.1.1 Definition

The subscribed IRPManager instances are notified that the information (management scope, IRP Reference, etc.) of one IRP, including itself and other EPIRP instances, stored in EPIRP has changed. This behaviour of sending notifyIRPInfoChanges shall cover the case when the EPIRP is installed in the operating environment and the information of IRPs are entered into the EPIRP via the EPIRP non-standardized local interface.

6.4.1.2 Input Parameters

Parameter Name	Qualifier	Matching Information	Comment
objectClass	M, Y	EPIRP objectClass.	Notification header - see [5]. It shall carry the class name of the EPIRP.
objectInstance	M, Y	EPIRP objectInstance.	Notification header - see [5]. It shall carry the DN of the EPIRP.
notificationId	M, N	--	Notification header - see [5].
eventTime	M, Y	--	Notification header - see [5].
systemDN	C, Y	--	Notification header - see [5].
notificationType	M, Y	" notifyIRPInfoChanges "	Notification header - see [5]
iRPDN	M, N	--	This is the DN of the IRP instance whose information (i.e., outline information and iRPReference information) registered with EPIRP has changed,
changeMode	M, N	ENUM {Register, Deregister, Modify}	Register: EPIRP now holds the outline information and IRP reference information of the IRP whose DN is in iRPDN. Deregister: EPIRP now no longer holds any information of the IRP instance whose DN is in iRPDN. Modify: EPIRP has changed some or all information of the IRP instance whose DN is in iRPDN.
additionalText	O, N	--	It can contain further next information for this notification.

6.4.1.3 Triggering Event

6.4.1.3.1 From-state

iRPInfoChange

Assertion Name	Definition
iRPInfoChange	The information of IRP (iRPVersionSet, iRPManagementScope, iRPReference) stored in EPIRP changes.

6.4.1.3.2 To-state

successEmitNotification

Assertion Name	Definition
successEmitNotification	EPIRPAgent finished emitting notifyIRPInfoChanges notification.

Annex A (informative): Change history

Change history								
Date	**TSG #**	**TSG Doc.**	**CR**	**Rev**	**Subject/Comment**	**Cat**	**Old**	**New**
Sep 2003	SA_21	SP-030424	--	--	Submitted to TSG SA#21 for Information	--	1.0.0	
Dec 2003	SA_22	SP-030635	--	--	Submitted to TSG SA#22 for Approval	--	2.0.0	6.0.0
Mar 2004	SA_23	SP-040121	0001	--	Clarification on Entry Point (EP IRP) Information Service	F	6.0.0	6.1.0
Jun 2004	SA_24	SP-040247	0002	--	Correct and clarify semantics of notification parameters and notification table	F	6.1.0	6.2.0
Dec 2005	SA_30	SP-050711	0003	--	Apply Generic System Context	F	6.2.0	6.3.0
Mar 2006	SA_31	SP-060089	0004	--	Correct semantics of notification object class and object instance in Comment	F	6.3.0	6.4.0
Jun 2007	SA_36	--	--	--	Automatic upgrade to Rel-7 (no CR) at freeze of Rel-7. Deleted reference to CMIP SS, discontinued from R7 onwards.	--	6.4.0	7.0.0
Sep 2007	SA_37	SP-070614	0005	--	Add IRP class name to operations	C	7.0.0	8.0.0
Mar 2009	SA_43	SP-090207	0006	--	Include reference to SOAP Solution Set specification	D	8.0.0	8.1.0
Dec 2009	-	-	-	-	Update to Rel-9 version (MCC)	--	8.1.0	9.0.0
Mar 2011	-	-	-	-	Update to Rel-10 version (MCC)	--	9.0.0	10.0.0
2012-09	-	-	-	-	Update to Rel-11 version (MCC)		10.0.0	**11.0.0**
2013-03	SA_59	SP-130049	0009	1	correct wrong ref to iRPId	A	11.0.0	**11.1.0**
2014-10	-	-	-	-	Update to Rel-12 version (MCC)		11.1.0	**12.0.0**
2016-01	-	-	-	-	Update to Rel-13 version (MCC)		12.0.0	**13.0.0**
2017-03	SA#75	-	-	-	Promotion to Release 14 without technical change		13.0.0	**14.0.0**

Change history							
Date	**Meeting**	**TDoc**	**CR**	**Rev**	**Cat**	**Subject/Comment**	**New version**
2018-06						Update to Rel-15 version (MCC)	15.0.0

History

Document history		
V15.0.0	July 2018	Publication