
ETSI EN 300 476-2 V1.2.1 (2000-11)

European Standard (Telecommunications series)

Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Protocol Implementation Conformance Statement (PICS) proforma; Part 2: Data Link Control (DLC) layer - Portable radio Termination (PT)

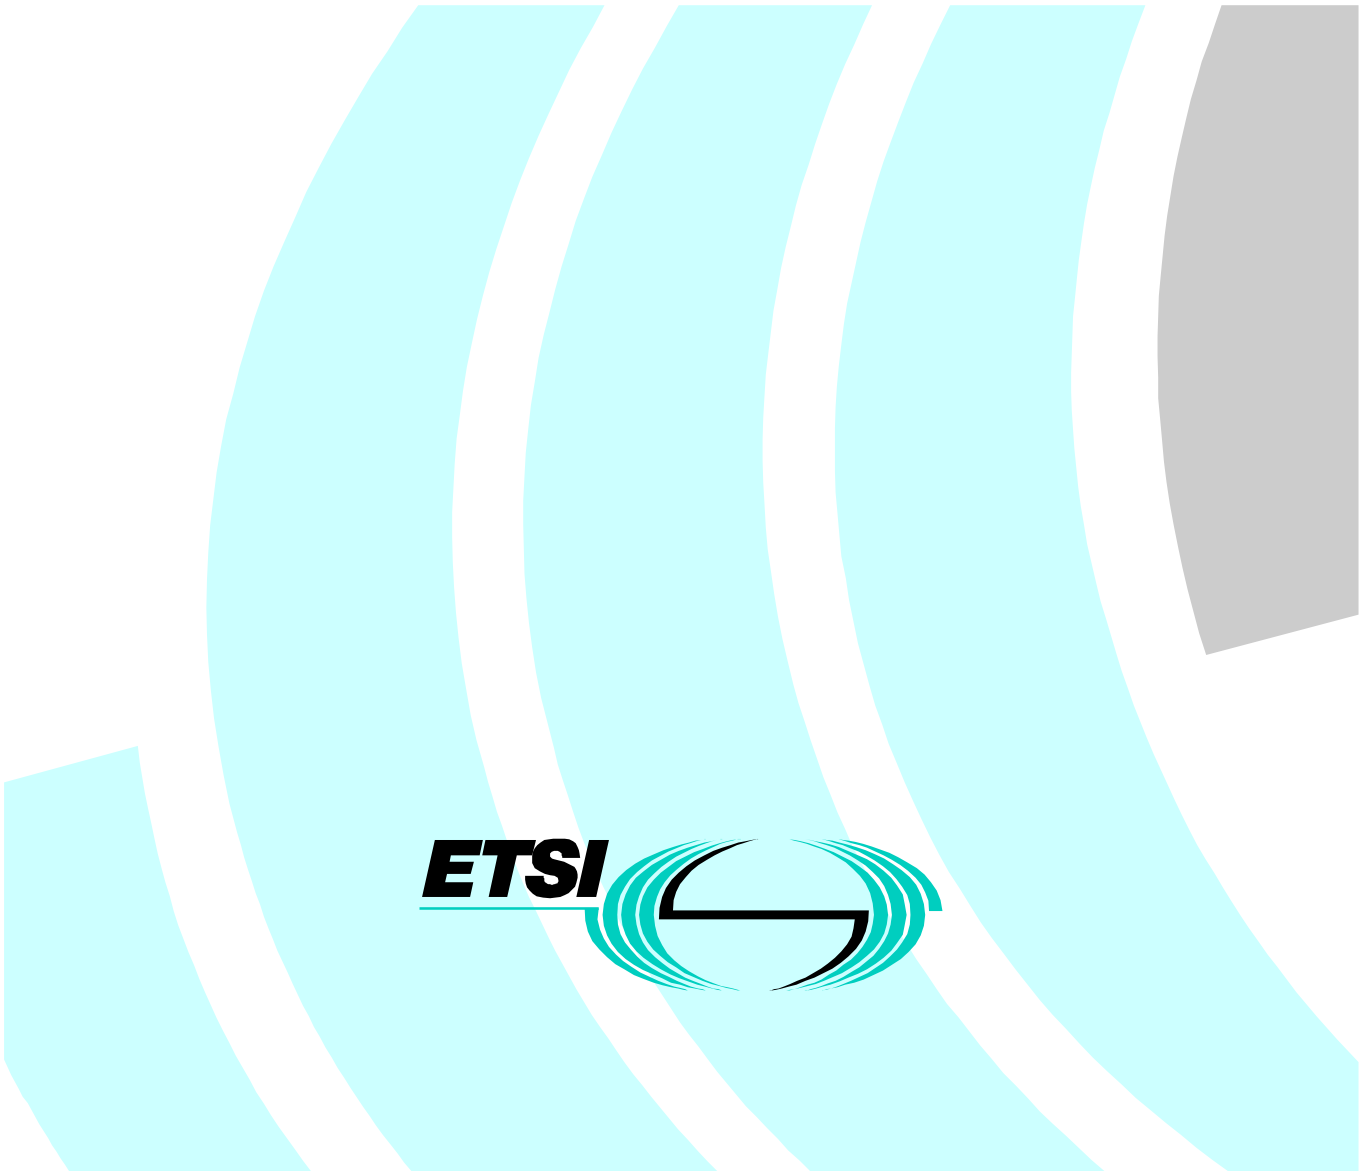

Reference
REN/DECT-040106-2

Keywords
access, DECT, PICS, radio, testing

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N° 348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N° 7803/88

Important notice

Individual copies of the present document can be downloaded from:
http://www.etsi.org

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at http://www.etsi.org/tb/status/

If you find errors in the present document, send your comment to:
editor@etsi.fr

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2000.
All rights reserved.

Contents

Intellectual Property Rights 5
Foreword 5
1 Scope 6
2 References 6
3 Definitions and abbreviations 6
3.1 Definitions 6
3.2 Abbreviations 7
4 Conformance requirement to this PICS proforma specification 7
Annex A (normative): PICS Proforma for DECT DLC PT 8
A.1 Introduction for completing the PICS proforma 8
A.1.1 Purposes and structure 8
A.1.2 Guidances for completing the PICS 10
A.2 Identification of the implementation 10
A.2.1 Date of statement 10
A.2.2 Implementation Under Test (IUT) identification 10
A.2.3 System Under Test (SUT) identification 10
A.2.4 Product supplier 11
A.2.5 Client identification 11
A.2.6 Contact person 11
A.3 Identification of the protocol 12
A.4 Global statement of conformance 12
A.5 Capabilities 12
A.5.1 Major capabilities 12
A.5.1.1 Services 12
A.5.1.2 Procedures 13
A.5.1.2.1 Generic signalling procedures 13
A.5.1.2.2 Class U procedures 13
A.5.1.2.3 Class A procedures 14
A.5.1.2.4 Class B procedures 14
A.5.1.2.5 Broadcast procedures 14
A.5.1.2.6 LU1 procedures 14
A.5.1.2.7 LU2 procedures 15
A.5.1.2.8 LU3 procedures 15
A.5.1.2.9 LU5 protected data procedures 16
A.5.1.2.10 LU5 unprotected data procedures 16
A.5.1.2.11 LU6 procedures 16
A.5.1.2.12 LU7 procedures 16
A.5.1.2.13 LU8 procedures 17
A.5.1.2.14 LU9 procedures 17
A.5.1.2.15 LU10 procedures 18
A.5.1.2.16 Management procedures 18
A.5.2 Protocol parameters 19
A.5.2.1 C-plane timers 19
A.5.2.2 U-plane timers 19
A.5.2.3 Class A parameters 19
A.5.2.4 Class B parameters 20
A.5.2.5 LU1 parameters 20
A.5.2.6 LU2 parameters 20
A.5.2.7 LU5 parameters 21
A.5.2.8 LU7 parameters 22

A.5.2.9 LU8 parameters 22
A.5.2.10 LU9 parameters 22
A.5.2.11 LU10 parameters 23
A.5.3 Protocol PDUs 23
A.5.3.1 C-plane PDUs 23
A.5.3.1.1 C-plane frame structure 23
A.5.3.1.2 C-plane messages 24
A.5.3.1.2.1 Message support 24
A.5.3.1.2.2 Class A I-command 25
A.5.3.1.2.3 Class A RR command/response 27
A.5.3.1.2.4 Class B I-command 28
A.5.3.1.2.5 Class B RR command/response 29
A.5.3.1.2.6 Class B RNR command/response 30
A.5.3.1.2.7 Class B REJ command/response 31
A.5.3.1.2.8 Class B SABM command 33
A.5.3.1.2.9 Class B DM response 34
A.5.3.1.2.10 Class B DISC command 35
A.5.3.1.2.11 Class B UA response 36
A.5.3.1.2.12 Class U UI command 37
A.5.3.2 U-plane PDUs 39
A.5.3.2.1 FU1 frame structure 39
A.5.3.2.2 FU2 frame structure 40
A.5.3.2.3 FU3a frame structure 41
A.5.3.2.4 FU3b frame structure 42
A.5.3.2.5 FU4a frame structure 43
A.5.3.2.6 FU4b frame structure 44
A.5.3.2.7 FU5a frame structure 45
A.5.3.2.8 FU5b frame structure 46
A.5.3.2.9 FU6a frame structure 47
A.5.3.2.10 FU6b frame structure 48
A.5.3.2.11 FU7 frame structure 49
A.5.3.2.12 FU8 frame structure 50
A.5.3.2.13 FU9 frame structure 52
A.5.3.2.14 FU10a frame structure 53
A.5.3.2.15 FU10b frame structure 54
A.5.4 Protocol error handling 56
A.5.4.1 General error handling 56
A.5.4.2 Class A error handling and recovery 56
A.5.4.3 Class B error handling and recovery 56

Bibliography 57

History 58

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (http://www.etsi.org/ipr).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This European Standard (Telecommunications series) has been produced by ETSI Project Digital Enhanced Cordless Telecommunications (DECT).

The present document is part 2 of a multi-part deliverable covering the Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Protocol Implementation Conformance Statement (PICS) proforma, as identified below:

Part 1: "Network (NWK) layer - Portable radio Termination (PT)";

Part 2: "Data Link Control (DLC) layer - Portable radio Termination (PT)";

Part 3: "Medium Access Control (MAC) layer - Portable radio Termination (PT)";

Part 4: "Network (NWK) layer - Fixed radio Termination (FT)";

Part 5: "Data Link Control (DLC) layer - Fixed radio Termination (FT)";

Part 6: "Medium Access Control (MAC) layer - Fixed radio Termination (FT)";

Part 7: "Physical layer".

Annex A contains the PICS proforma for the PT DLC layer.

National transposition dates	
Date of adoption of this EN:	24 November 2000
Date of latest announcement of this EN (doa):	28 February 2001
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	31 August 2001
Date of withdrawal of any conflicting National Standard (dow):	31 August 2001

1 Scope

The present document provides the Protocol Implementation Conformance Statement (PICS) proforma for the Digital Enhanced Cordless Telecommunications Data Link Control layer at the Portable Termination as defined in EN 300 175-4 [2] in compliance with the relevant requirements and in accordance with the relevant guidance given in ISO/IEC 9646-7 [4].

The supplier of an implementation which is claimed to conform to EN 300 175-4 [2] is required to complete a copy of the PICS proforma provided in the annex A of the present document.

2 References

The following documents contain provisions which, through reference in this text, constitute provisions of the present document.

- References are either specific (identified by date of publication, edition number, version number, etc.) or non-specific.
- For a specific reference, subsequent revisions do not apply.
- For a non-specific reference, the latest version applies.
- A non-specific reference to an ETS shall also be taken to refer to later versions published as an EN with the same number.

[1] ETSI EN 300 175-1: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Part 1: Overview".

[2] ETSI EN 300 175-4: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Part 4: Data Link Control (DLC) layer".

[3] ISO/IEC 9646-1 (1995): "Information technology - Open Systems Interconnection - Conformance testing methodology and framework - Part 1: General concepts".

[4] ISO/IEC 9646-7 (1995): "Information technology - Open Systems Interconnection - Conformance testing methodology and framework - Part 7: Implementation Conformance Statements".

[5] ETSI ETS 300 651: "Digital Enhanced Cordless Telecommunications (DECT); Data Services Profile (DSP); Generic data link service (service type C, class 2)".

3 Definitions and abbreviations

3.1 Definitions

For the purposes of the present document, the following terms and definitions apply:

- terms given in EN 300 175-1 [1];
- terms given in ISO/IEC 9646-1 [3] and in ISO/IEC 9646-7 [4].

In particular, the following terms given in ISO/IEC 9646-1 [3] apply:

Implementation Conformance Statement (ICS): statement made by the supplier of an implementation or system claimed to conform to a given specification, stating which capabilities have been implemented. The ICS can take several forms: protocol ICS, profile ICS, profile specific ICS, information object ICS, etc.

ICS proforma: document, in the form of a questionnaire, which when completed for an implementation or system becomes an ICS

Protocol ICS (PICS): PICS for an implementation or system claimed to conform to a given protocol specification

3.2 Abbreviations

For the purposes of the present document, the abbreviations given in ISO/IEC 9646-1 [3], the data link control layer abbreviations given in EN 300 175-4 [2], and the following apply:

ICS	Implementation Conformance Statement
IUT	Implementation Under Test
PICS	Protocol Implementation Conformance Statement
SUT	System Under Test

4 Conformance requirement to this PICS proforma specification

If it claims to conform to the present document, the actual PICS proforma to be filled in by a supplier shall be technically equivalent to the text of the PICS proforma given in annex A, and shall preserve the numbering/naming and ordering of the proforma items.

A PICS which conforms to the present document shall be a conforming PICS proforma completed in accordance with the guidances for completion given in clause A.1.

Annex A (normative): PICS Proforma for DECT DLC PT

Notwithstanding the provisions of the copyright clause related to the text of the present document, ETSI grants that users of the present document may freely reproduce the PICS proforma in this annex so that it can be used for its intended purposes and may further publish the completed PICS.

A.1 Introduction for completing the PICS proforma

A.1.1 Purposes and structure

The purpose of this PICS proforma is to provide a mechanism whereby a supplier of an implementation of the portable termination specific data link control layer requirements of EN 300 175-4: DECT Data link control layer may provide information about the implementation in a standardized manner.

The PICS proforma is subdivided into subclauses for the following categories of information:

- instructions for completing the PICS proforma;
- identification of the implementation;
- identification of the EN 300 175-4: DECT Data link control layer;
- PICS proforma tables:
  - global statement of conformance;
  - functional groups and procedures;
  - timers and protocol parameters;
  - messages;
  - information elements;
  - protocol error handling.

The PICS proforma contained in this annex is comprised of information in tabular form in accordance with the guidelines presented in ISO/IEC 9646-7.

Item column

The item column contains a number which identifies the item in the table.

Item description column

The item description column describes in free text each respective item (e.g. parameters, timers, etc.). It implicitly means "is <item description> supported by the implementation?".

Status column

The following notations, defined in ISO/IEC 9646-7, are used for the status column:

m or M	mandatory - the capability is required to be supported.
o or O	optional - the capability may be supported or not (e.g. the capability is not allowed because the underlying DECT layers (service provider) cannot handle it or the requirement belongs to an application i.e. does not belong to the data link control layer)
n/a or N/A	not applicable - in the given context, it is impossible to use the capability.

x or X	prohibited (excluded) - there is a requirement not to use this capability in the given context.
o.i or O.i	qualified optional - for mutually exclusive or selectable options from a set. "i" is an integer which identifies an unique group of related optional items and the logic of their selection which is defined immediately following the table.
ci or Ci	conditional - the requirement on the capability ("m", "o", "x" or "n/a") depends on the support of other optional or conditional items. "i" is an integer identifying a unique conditional status expression which is defined immediately following the table.
i or I	out-of-scope - this capability is outside the scope of the given specification, and hence irrelevant and not subject to conformance testing. This status is in particular applicable for data fields which are reserved for future use. The structure of such fields has to be supported, but the value is undefined and thus to be ignored.

Reference column

The reference column gives reference to EN 300 175-4: Data link control layer, except where explicitly stated otherwise.

Support column

The support column shall be filled in by the supplier of the implementation. The following common notations, defined in ISO/IEC 9646-7, are used for the support column:

Y or y	supported by the implementation;
N or n	not supported by the implementation;
N/A, n/a or -	no answer required (allowed only if the status is n/a, directly or after evaluation of a conditional status).

In each context, the kind of "non-support" which is implemented at the receiving may be additionally indicated such as:

- Err the item is treated as a protocol error;
- lg the item is received and ignored (i.e. processed syntactically, but not semantically);
- rj the item is received and rejected.

NOTE: As stated in ISO/IEC 9646-7, support for a PDU requires the ability to parse all valid parameters of that PDU. Supporting a PDU while having no ability to parse a valid parameter is non-conformant. Support for a parameter on a PDU means that the semantics of that parameter are supported.

Values allowed column

The values allowed column contains the values or the ranges of values allowed. The range of value is defined as follows: [min value] to [max value]. Alternative values are defined as follows:

[value1], [value 2], to., [value n].

EXAMPLE: '00110000'B to '01001011'B is the value range
from '00110000'B to '01001011'B
'00110000'B, '01001011'B the value can be '00110000'B or '01001011'B.

Values supported column

The values supported column shall be filled in by the supplier of the implementation. In this column, the values or the ranges of values supported by the implementation shall be indicated.

Prerequisite line

A prerequisite line takes the form: Prerequisite: <predicate>.

A prerequisite line before a clause or table title indicates that the whole clause or the whole table is not required to be completed if the predicate is FALSE.

A.1.2 Guidances for completing the PICS

The supplier of the implementation shall complete the PICS proforma in each of the spaces provided using the notation described in subclause A.1.1. Specific instruction is provided in the text which precedes certain table.

A.2 Identification of the implementation

A.2.1 Date of statement

Identification of the Implementation Under Test (IUT) and the system in which it resides (the System Under Test (SUT)) should be filled in so as to provide as much detail as possible regarding version numbers and configuration options.

Table A.1: Date of statement

Date of statement		
Day	**Month**	**Year**

A.2.2 Implementation Under Test (IUT) identification

The supplier of the implementation shall enter information necessary to uniquely identify the IUT in table A.2.

Table A.2: IUT identification

IUT identification	
IUT name	
IUT version	

A.2.3 System Under Test (SUT) identification

The supplier of the implementation shall enter information necessary to uniquely identify the SUT in table A.3.

Table A.3: SUT identification

IUT identification	
SUT name	International Portable Equipment Identity (IPEI):
Hardware configuration	

A.2.4 Product supplier

Table A.4: Product supplier

Product supplier	
Name	
Address	
Phone No.	
Fax No.	
E-mail address	
Additional information	

A.2.5 Client identification

The product supplier information and client information should both be filled in if they are different.

Table A.5: Client

Client	
Name	
Address	
Phone No.	
Fax No.	
E-mail address	
Additional information	

A.2.6 Contact person

A person who can answer queries regarding information supplied in the PICS should be named as the contact person.

Table A.6: Contact person

Contact person	
Name	
Address	
Phone No.	
Fax No.	
E-mail address	
Additional information	

A.3 Identification of the protocol

Table A.7: Identification of protocol

Identification of protocol	
Title of specification	Digital Enhanced Cordless Telecommunications Common Interface Part 4: Data Link Control Layer
Reference no.	EN 300 175-4
Date of Publication	

A.4 Global statement of conformance

An explicit answer shall be entered, in each of the support or supported column boxes provided, using the notation described in subclause A.1.2.

Table A.8: Global statement of conformance

Global statement of conformance	
Are all mandatory capabilities implemented?	

NOTE: Answering "No" to this question indicates non-conformance to the <reference specification type> specification. Non-supported mandatory capabilities are to be identified in the ICS, with an explanation of why the implementation is non-conforming, on pages attached to the ICS proforma.

A.5 Capabilities

A.5.1 Major capabilities

A.5.1.1 Services

Table A.9: Data link services

Item	Data link services	Ref.	Status	Support
1	C-plane services	5	o.	
2	U-plane services	11	o.	
o.: It is mandatory to support at least one of these options.				

Table A.10: C-plane services

Prerequisite: A.9/1				
Item	**C-plane services**	**Ref.**	**Status**	**Support**
1	Class U service	5.1	o.10	
2	Class A service	5.1	o.10	
3	Class B service	5.1	o.10	
4	Broadcast service	5.2, 9.4	o.10	
o.10: It is mandatory to support at least one of this options.				

Table A.11: U-plane services

Prerequisite: A.9/2				
Item	**U-plane services**	**Ref.**	**Status**	**Support**
1	LU1 - Transparent Unprotected service (TRUP)	11.2	o.11	
2	LU2 - Frame Relay service (FREL)	11.3	o.11	
3	LU3 - Frame Switching service (FSWI)	11.4	o.11	
4	LU4 - Forward error correction service (FEC)	11.5	c1101	
5	LU5 - Basic Rate Adaptation (BRAT) protected service	11.6	o.11	
6	LU5 - Basic Rate Adaptation (BRAT) unprotected service	11.6	o.11	
7	LU6 - Secondary Rate Adaptation service (SRAT)	11.7	c1102	
8	LU7 - 64kbit/s data bearer service with ARQ mechanism	11.9	c1103	
9	LU8 - 64kbit/s data bearer service without ARQ mechanism	11.10	o.11	
10	LU9 - Unprotected Rate Adaption for V series equipment (RAVE) Service	11.11	o.11	
11	LU10 - Enhanced Data Service	11.12	o.11	
12	LU16 - Escape for non-standard family (ESC)	11.8	o.11	
o.11: It is mandatory to support at least one of this options. c1101: The definitive specification of this service is for further study. c1102: IF A.11/6 THEN o ELSE x. c1103: IF 64kbit/s data service required THEN m ELSE n/a.				

Table A.12: Management services

Item	**Management services**	**Ref.**	**Status**	**Support**
1	MAC connection management	10.2	c1201	
2	DLC C-plane management	10.3	c1202	
3	DLC U-plane management	10.4	c1203	
4	Connection handover management	10.5	o	
5	Connection ciphering management	10.6	o	
c1201: IF A.9/1 OR A.9/2 THEN m ELSE n/a. c1202: IF A.9/1 THEN m ELSE n/a. c1203: IF A.9/2 THEN m ELSE n/a.				

A.5.1.2 Procedures

A.5.1.2.1 Generic signalling procedures

Table A.13: Generic signalling procedures

Prerequisite: A.10/2 OR A.10/3				
Item	**Generic signalling procedures**	**Ref.**	**Status**	**Supp.**
1	Segmentation of NWK information	5.1.1, 7.7	o	
2	C_S channel fragmentation and recombination	6.1.2, 6.1.3, 6.1.4, 6.1.4.2	o.13	
3	C_F channel fragmentation and recombination	6.1.2, 6.1.3, 6.1.4, 6.1.4.1	o.13	
o.13: It is mandatory to support at least one of this options.				

A.5.1.2.2 Class U procedures

Table A.14: Class U procedures

Prerequisite: A.10/1				
Item	**Class U procedures**	**Ref.**	**Status**	**Support**
1	Class U link establishment	9.3.2	m	
2	Class U information transfer	9.3.3	m	
3	Class U link release	9.3.4	m	

A.5.1.2.3 Class A procedures

Table A.15: Class A procedures

Prerequisite: A.10/2				
Item	**Class A procedures**	**Ref.**	**Status**	**Support**
1	Class A link establishment	9.2.3.1	m	
2	Class A acknowledged information transfer	9.2.3.2, 9.2.3.3, 9.2.3.4, 9.2.3.5, 9.2.3.6	m	
3	Class A link release	9.2.3.7	m	
4	Class A link re-establishment	9.2.3.8	o	
5	Class A connection handover	9.2.7.3, 9.2.7.3.1	o	

A.5.1.2.4 Class B procedures

Table A.16: Class B procedures

Prerequisite: A.10/3				
Item	**Class B procedures**	**Ref.**	**Status**	**Support**
1	Class B multiple frame establishment	9.2.4	m	
2	Class B information transfer	9.2.5	m	
3	Class B link release	9.2.6	m	
4	Class B link suspension and resumption	9.2.7	o	
5	Class B connection handover	9.2.7.3, 9.2.7.3.2	o	

A.5.1.2.5 Broadcast procedures

Table A.17: Broadcast procedures

Prerequisite: A.10/4				
Item	**Broadcast procedures**	**Ref.**	**Status**	**Support**
1	Normal operation	9.4.1	m	
2	Expedited operation	9.4.2	o	

A.5.1.2.6 LU1 procedures

Table A.18: LU1 procedures

Prerequisite: A.11/1				
Item	**LU1 procedures**	**Ref.**	**Status**	**Support**
1	U-plane Class 0/min delay	11.2	o.1801	
2	U-plane class 0	11.2	o.1801	
3	FU1 frame operation	12.2	m	
o.1801: It is mandatory to support at least one of these options.				

Table A.19: FU1 options

Prerequisite: A.18/3				
Item	**FU1 options**	**Ref.**	**Status**	**Support**
1	FU1 buffering procedures (FU1 frame operation)	12.2.2	m	
2	FU1 minimum delay (speech) operation	12.2.3	m	
3	FU1 connection handover	12.2.4	c1901	
4	FU1 transmission order	12.2.5	m	
c1901: IF A.15/5 OR A.16/5 THEN m ELSE n/a.				

A.5.1.2.7 LU2 procedures

Table A.20: LU2 procedures

Prerequisite: A.11/2				
Item	**LU2 procedures**	**Ref.**	**Status**	**Support**
1	Checksum operation	11.3.2	m	
2	Segmentation	11.3.3	m	
3	Data transmission	11.3.4	m	
4	FU4 buffering procedures	12.5.2	o.20	
5	FU5 buffering procedures	12.6.2	o.20	
6	FU6 buffering procedures	12.7.2	o.20	
o.20: It is mandatory to support at least one of this options.				

Table A.21: FU4 options

Prerequisite: A.20/4				
Item	**FU4 options**	**Ref.**	**Status**	**Support**
1	FU4 connection handover	12.5.3	o	
2	FU4 transmission order	12.5.4	m	

Table A.22: FU5 options

Prerequisite: A.20/5				
Item	**FU5 options**	**Ref.**	**Status**	**Support**
1	FU5 connection handover	12.6.3	o	
2	FU5 transmission order	12.6.4	m	

Table A.23: FU6 options

Prerequisite: A.20/6				
Item	**FU6 options**	**Ref.**	**Status**	**Support**
1	FU6 connection handover	12.7.3	o	
2	FU6 transmission order	12.7.4	m	

A.5.1.2.8 LU3 procedures

Table A.24: LU3 procedures

Prerequisite: A.11/3				
Item	**LU3 procedures**	**Ref.**	**Status**	**Support**
1	Establishment of LAP-U multiframe operation	11.4 <actually ETS 300 651>	o.2401	
2	Maintenance of LAP-U multiframe operation	11.4 <actually ETS 300 651>	o.2401	
3	Release of LAP-U multiframe operations	11.4 <actually ETS 300 651>	o.2401	
o.2401: It is mandatory to support at least one of these options.				

A.5.1.2.9 LU5 protected data procedures

Table A.25: LU5 protected data procedures

Prerequisite: A.11/5				
Item	**LU5 protected data procedures**	**Ref.**	**Status**	**Support**
1	Data buffering and initial rate adaptation	11.6.2.2	m	
2	Multi-channel set multiplexing	11.6.2.3	m	
3	Segmentation of Multiplexed Data Units	11.6.2.4	m	
4	Frame sequencing	11.6.2.5	m	
5	FU5 buffering procedures	12.6.2	m	
6	FU5 connection handover	12.6.3	o	
7	FU5 transmission order	12.6.4	m	

A.5.1.2.10 LU5 unprotected data procedures

Table A.26: LU5 unprotected data procedures

Prerequisite: A.11/6				
Item	**LU5 unprotected data procedures**	**Ref.**	**Status**	**Support**
1	Data buffering and initial rate adaptation	11.6.3.2	m	
2	Multi-channel set multiplexing	11.6.3.3	m	
3	Segmentation of Multiplexed Data Units	11.6.3.4	m	
4	FU1 buffering procedure	12.2.2	m	
5	FU1 minimum delay (speech) operation	12.2.3	o	
6	FU1 connection handover	12.2.4	o	
7	FU1 transmission order	12.2.5	m	

A.5.1.2.11 LU6 procedures

Table A.27: LU6 procedures

Prerequisite: A.11/7				
Item	**LU6 procedures**	**Ref.**	**Status**	**Support**
1	Rate adaptation of asynchronous lower rates	11.7	c2701	
2	Rate adaptation of synchronous lower rates to an intermediate rate	11.7	c2701	
3	Rate adaptation of synchronous rates of 48 kbit/s and 56 kbit/s to 64 kbit/s	11.7	c2701	
c2701: IF A.11/6 THEN o ELSE x.				

A.5.1.2.12 LU7 procedures

Table A.28: LU7 procedures

Prerequisite: A.11/8				
Item	**LU7 procedures**	**Ref.**	**Status**	**Support**
1	Establishment and synchronization procedures	11.9.4.3.1	m	
2	Active phase procedures	11.9.4.3.2	m	
3	Release procedures	11.9.4.3.3	m	
4	Exceptional procedures	11.9.4.4	m	

Table A.29: LU7 establishment and synchronization procedures

Prerequisite: A.28/1				
Item	**LU7 establishment and synchronization procedures**	**Ref.**	**Status**	**Support**
1	Call establishment and synchronization	11.9.4.3.1	m	

Table A.30: LU7 active phase procedures

Prerequisite: A.28/2				
Item	**LU7 active phase procedures**	**Ref.**	**Status**	**Support**
1	Transmitting frames	11.9.4.3.2.1	m	
2	Re-transmitting frames	11.9.4.3.2.2	m	
3	Receiving frames	11.9.4.3.2.3	m	
4	Sending acknowledgements	11.9.4.3.2.4	m	
5	Receiving acknowledgements	11.9.4.3.2.5	m	

Table A.31: LU7 exceptional procedures

Prerequisite: A.28/4				
Item	**LU7 exceptional procedures**	**Ref.**	**Status**	**Support**
1	Invalid frame condition	11.9.4.4.1	m	
2	Establishment	11.9.4.4.2	m	
3	Transmitting frames	11.9.4.4.3	m	
4	Receiving frames	11.9.4.4.4	m	
5	Sending acknowledgements	11.9.4.4.5	m	
6	N(R) sequence error	11.9.4.4.7	m	
7	N(O) sequence error	11.9.4.4.8	m	
8	N(S) sequence error	11.9.4.4.9	m	
9	Format error	11.9.4.4.10	m	
10	Abnormal release	11.9.4.4.11	m	
11	Implicit reset	11.9.4.4.12	m	

A.5.1.2.13 LU8 procedures

Table A.32: LU8 procedures

Prerequisite: A.11/9				
Item	**LU8 procedures**	**Ref.**	**Status**	**Support**
1	LU7 procedures without ARQ	11.10	m	

A.5.1.2.14 LU9 procedures

Table A.33: LU9 procedures

Prerequisite: A.11/10				
Item	**LU9 procedures**	**Ref.**	**Status**	**Support**
1	Alignment signal management	11.11.2	m	
2	V.24 signalling	11.11.3	m	
3	Rate coding	11.11.4	m	
4	DECT independent clocking	11.11.5	m	
5	User data transfer	11.11.6	m	
6	FU9 buffering procedures	11.11.1.1.2	m	
7	FU9 connection handover	11.11.1.1.3	o	
8	FU9 transmission order	11.11.1.1.4	m	

A.5.1.2.15 LU10 procedures

Table A.34: LU10 procedures

Prerequisite: A.11/11				
Item	**LU10 procedures**	**Ref.**	**Status**	**Support**
1	Peer-to-peer transmission of user data	11.12.3	m	
2	Segmentation of Multiplexed Data Units	11.12.2	m	
3	Management of V(S), V(R), handling of N(S), N(R)	11.12.2	m	
4	FU10 buffering procedures	12.11.2	m	
5	FU10 connection handover	12.11.3	o	
6	FU10 transmission order	12.11.4	m	

A.5.1.2.16 Management procedures

Table A.35: Management procedures

Prerequisite: A.12				
Item	**Management procedures**	**Ref.**	**Status**	**Support**
1	MAC connection management	10.2	c3501	
2	DLC C-plane management	10.3	c3502	
3	DLC U-plane management	10.4	c3503	
4	Connection handover management	10.5	c3504	
5	Connection ciphering management	10.6	c3505	
c3501: IF A.12/1 THEN m ELSE n/a. c3502: IF A.12/2 THEN m ELSE n/a. c3503: IF A.12/3 THEN m ELSE n/a. c3504: IF A.12/4 AND (A.15/5 OR A.16/5 OR A.19/3 OR A.21/1 OR A.22/1 OR A.23/1 OR A.25/6 OR A.26/6) THEN m ELSE x. c3505: IF A.12/5 THEN m ELSE n/a.				

Table A.36: MAC connection management procedures

Prerequisite: A.35/1				
Item	**MAC connection management procedures**	**Ref.**	**Status**	**Support**
1	MAC connection set-up	10.2.1	m	
2	MAC connection release	10.2.2	m	
3	MAC connection modification	10.2.3	o	
4	MAC connection identification	10.2.4	m	
5	Selection of logical channels (C_S or C_F)	10.2.5	o	

Table A.37: DLC C-plane management procedures

Prerequisite: A.35/2				
Item	**DLC C-plane management procedures**	**Ref.**	**Status**	**Support**
1	Provision of link signature	10.3.1	m	
2	Routeing of connection oriented links	10.3.2	c3701	
3	Routeing of connectionless links	10.3.3	o	
c3701: IF A.9/1 THEN m ELSE n/a.				

Table A.38: DLC U-plane management procedures

Prerequisite: A.35/3				
Item	**DLC U-plane management procedures**	**Ref.**	**Status**	**Support**
1	U-plane establishment	10.4.1	m	
2	U-plane release	10.4.2	m	
3	U-plane suspend and resume	10.4.3	o	

Table A.39: Connection ciphering management procedures

Prerequisite: A.35/5				
Item	**Connection ciphering management procedures**	**Ref.**	**Status**	**Support**
1	Providing a key to the MAC layer	10.6.1.1	m	
2	Starting the ciphering	10.6.1.2	m	
3	Stopping the ciphering	10.6.1.2	o	
4	Connection handover of ciphered connection	10.6.1.3	c3901	
5	DLC-initiated ciphering	10.6.2	o	
c3901: IF A.35/4 THEN m ELSE n/a.				

A.5.2 Protocol parameters

A.5.2.1 C-plane timers

Table A.40: C-plane timers

Prerequisite: A.9/1						
Item	**C-plane timers**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	DL.00	A.1	c4004		2 s	
2	DL.01	A.1	c4003		2 s	
3	DL.02	A.1	c4004		2 s	
4	DL.03	A.1	c4003		2 s	
5	DL.04 (CF routed frames)	A.1	c4001		1 s	
6	DL.04 (CS routed frames)	A.1	c4002		2 s	
7	DL.05	A.1	c4005		10 s	
8	DL.06	A.1	c4005		4 s	
9	DL.07	A.1	c4006		2 s	
c4001: IF A.13/3 THEN m ELSE n/a. c4002: IF A.13/2 THEN m ELSE n/a. c4003: IF A.16/4 THEN m ELSE n/a. c4004: IF A.10/3 THEN m ELSE n/a. c4005: IF A.35/4 THEN m ELSE n/a. c4006: IF A.10/2 THEN m ELSE n/a.						

A.5.2.2 U-plane timers

Table A.41: U-plane timers

Prerequisite: A.9/2						
Item	**U-plane timers**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	DLU.01	A.2	c4101		2 s	
c4101: IF A.49/4 OR A.49/5 OR A.49/6 THEN m ELSE n/a.						

A.5.2.3 Class A parameters

Table A.42: Class A parameter values

Prerequisite: A.10/2				
Item	**Class A parameter**	**Ref.**	**Status**	**Support**
1	Fixed window size of 1	9.2.3.2, 7.5.2.2	m	
2	Modulus 2	9.2.3.2, 7.5.2.1	m	

A.5.2.4 Class B parameters

Table A.43: Class B parameter values

Prerequisite: A.10/3				
Item	**Class B parameter**	**Ref.**	**Status**	**Support**
1	Fixed window size of 3	7.5.2.2	m	
2	Modulus 8	9.2.4.2, 7.5.2.1	m	

A.5.2.5 LU1 parameters

Table A.44: LU1 Frame types

Prerequisite: A.11/1				
Item	**Frame types**	**Ref.**	**Status**	**Support**
1	FU1 frame structure	11.2, 12.2	m	

Table A.45: LU1 Connection types

Prerequisite: A.11/1				
Item	**Connection types**	**Ref.**	**Status**	**Support**
1	I_N / min delay - Half slot (10 octets)	11.2, 12.2.1	o.45	
2	I_N / normal delay - Half slot (10 octets)	11.2, 12.2.1	o.45	
3	I_N / min delay - Full slot (40 octets)	11.2, 12.2.1	o.45	
4	I_N / normal delay - Full slot (40 octets)	11.2, 12.2.1	o.45	
5	I_N / min delay - Double slot (100 octets)	11.2, 12.2.1	o.45	
6	I_N / normal delay - Double slot (100 octets)	11.2, 12.2.1	o.45	
o.45: It is mandatory to support at least one of this options.				

Table A.46: LU1 Transmission classes

Prerequisite: A.11/1				
Item	**Transmission classes**	**Ref.**	**Status**	**Support**
1	class 0.min delay	11.2	o.46	
2	class 0	11.2	o.46	
o.46: It is mandatory to support at least one of this options.				

A.5.2.6 LU2 parameters

Table A.47: LU2 Frame types

Prerequisite: A.11/2				
Item	**Frame type**	**Ref.**	**Status**	**Support**
1	FU4 frame structure	11.3.3, 12.5.1	c4701	
2	FU5 frame structure	11.3.3, 12.6.1	c4702	
3	FU6 frame structure	11.3.3, 12.7.1	c4703	
c4701: IF A.49/2 OR A.49/5 OR A.49/8 THEN m ELSE n/a. c4702: IF A.49/1 OR A.49/4 OR A.49/7 THEN m ELSE n/a. c4703: IF A.49/3 OR A.49/6 OR A.49/9 THEN m ELSE n/a.				

Table A.48: LU2 Connection types

Prerequisite: A.11/2				
Item	**Connection types**	**Ref.**	**Status**	**Support**
1	I_P / error-detect- Half slot (08 octets)	11.3, 12.5.1, 12.6.1, 12.7.1	o.48	
2	I_P / error-correct- Half slot (08 octets)	11.3, 12.5.1, 12.6.1, 12.7.1	o.48	
3	I_P / error-detect- Full slot (32 octets)	11.3, 12.5.1, 12.6.1, 12.7.1	o.48	
4	I_P / error-correct- Full slot (32 octets)	11.3, 12.5.1, 12.6.1, 12.7.1	o.48	
5	I_P / error-detect- Double slot (80 octets)	11.3, 12.5.1, 12.6.1, 12.7.1	o.48	
6	I_P / error-correct- Double slot (80 octets)	11.3, 12.5.1, 12.6.1, 12.7.1	o.48	
o.48: It is mandatory to support at least one of this options.				

Table A.49: LU2 Transmission classes

Prerequisite: A.11/2				
Item	**Transmission classes**	**Ref.**	**Status**	**Support**
1	class 0 / bi- or unidirectional	11.3.3	o.49	
2	class 0 / bi-directional	11.3.3	o.49	
3	class 0 / unidirectional	11.3.3	o.49	
4	class 1 / bi- or unidirectional	11.3.3	o.49	
5	class 1 / bi-directional	11.3.3	o.49	
6	class 1 / unidirectional	11.3.3	o.49	
7	class 2 / bi- or unidirectional	11.3.3	o.49	
8	class 2 / bi-directional	11.3.3	o.49	
9	class 2 / unidirectional	11.3.3	o.49	
o.49: It is mandatory to support at least one of this options.				

A.5.2.7 LU5 parameters

Table A.50: LU5 Frame types

Prerequisite: A.11/5 OR A.11/6				
Item	**Frame type**	**Ref.**	**Status**	**Support**
1	FU1 frame structure	11.6.3.1, 12.2	c5001	
2	FU5 frame structure	11.6.2.1, 12.6	c5002	
c5001: IF A.11/6 THEN m ELSE n/a. c5002: IF A.11/5 THEN m ELSE n/a.				

Table A.51: LU5 Connection types

Prerequisite: A.11/5 OR A.11/6				
Item	**Connection types**	**Ref.**	**Status**	**Support**
1	I_P / error-detect- Half slot (08 octets)	11.6, 12.6.1	o.51	
2	I_P / error-correct- Half slot (08 octets)	11.6, 12.6.1	o.51	
3	I_P / error-detect- Full slot (32 octets)	11.6, 12.6.1	o.51	
4	I_P / error-correct- Full slot (32 octets)	11.6, 12.6.1	o.51	
5	I_P / error-detect- Double slot (80 octets)	11.6, 12.6.1	o.51	
6	I_P / error-correct- Double slot (80 octets)	11.6, 12.6.1	o.51	
o.51: It is mandatory to support at least one of this options.				

Table A.52: LU5 Transmission classes

Prerequisite: A.11/5 OR A.11/6				
Item	**Transmission classes**	**Ref.**	**Status**	**Support**
1	class 0	11.6.2	c5201	
2	class 3	11.6.2	c5202	
c5201: IF A.50/1 THEN m ELSE n/a. c5202: IF A.50/2 THEN m ELSE n/a.				

A.5.2.8 LU7 parameters

Table A.53: LU7 Frame types

Prerequisite: A.11/8				
Item	**Frame types**	**Ref.**	**Status**	**Support**
1	FU7 frame structure	11.9.4.2	m	

Table A.54: LU7 Connection types

Prerequisite: A.11/8				
Item	**Connection types**	**Ref.**	**Status**	**Support**
1	I_N / normal delay - Double slot (100 octets)	11.9.2, 11.9.3	m	

A.5.2.9 LU8 parameters

Table A.55: LU8 Frame types

Prerequisite: A.11/9				
Item	**Frame types**	**Ref.**	**Status**	**Support**
1	FU8 frame structure	11.10.3	m	

Table A.56: LU8 Connection types

Prerequisite: A.11/9				
Item	**Connection types**	**Ref.**	**Status**	**Support**
1	I_N / normal delay - Double slot (100 octets)	11.10.1	m	

A.5.2.10 LU9 parameters

Table A.57: LU9 Frame types

Prerequisite: A.11/10				
Item	**Frame types**	**Ref.**	**Status**	**Support**
1	FU9 frame structure	11.11.1.1.1	m	

Table A.58: LU9 Connection types

Prerequisite: A.11/10				
Item	**Connection types**	**Ref.**	**Status**	**Support**
1	I_N / normal delay - Full slot (40 octets)	11.11.1.1.1	m	

Table A.59: LU9 Transmission classes

Prerequisite: A.11/10				
Item	**Transmission classes**	**Ref.**	**Status**	**Support**
1	class 0	11.11.1	m	

A.5.2.11 LU10 parameters

Table A.60: LU10 Frame types

Prerequisite: A.11/11				
Item	**Frame types**	**Ref.**	**Status**	**Support**
1	FU10 frame structure	12.11.1	m	

Table A.61: LU10 Connection types

Prerequisite: A.11/11				
Item	**Connection types**	**Ref.**	**Status**	**Support**
1	I_P / error-detect- Half slot (08 octets)	12.11.1	o.61	
2	I_P / error-detect- Full slot (32 octets)	12.11.1	o.61	
3	I_P / error-detect- Double slot (80 octets)	12.11.1	o.61	
o.61: It is mandatory to support at least one of this options.				

Table A.62: LU10 Transmission classes

Prerequisite: A.11/11				
Item	**Transmission classes**	**Ref.**	**Status**	**Support**
1	class 2 / bi- or unidirectional	11.12.2	o.62	
2	class 3 / bi- or unidirectional	11.12.2	o.62	
o.62: It is mandatory to support at least one of this options.				

A.5.3 Protocol PDUs

A.5.3.1 C-plane PDUs

A.5.3.1.1 C-plane frame structure

Table A.63: Frame structures (Sending PT to FT)

Item	**Frame Structures**	**Ref.**	**Status**	**Support**
1	Frame structure of format type FA.	6.1	c6301	
2	Broadcast service frame structure	6.2	n/a	
c6301: IF A.9/1 THEN m ELSE n/a.				

Table A.64: Frame structures (Receiving FT to PT)

Item	**Frame Structures**	**Ref.**	**Status**	**Support**
1	Frame structure of format type FA.	6.1	c6401	
2	Broadcast service frame structure	6.2	c6402	
c6401: IF A.9/1 THEN m ELSE n/a. c6402: IF A.10/4 THEN m ELSE n/a.				

Table A.65: Frame format type FA (Sending PT to FT)

Prerequisite: A.63/1				
Item	**Frame elements**	**Ref.**	**Status**	**Support**
1	Address field	6.1	m	
2	Control field	6.1	m	
3	Length indicator field	6.1	m	
4	Information field	6.1	c6501	
5	Fill field	6.1	m	
6	Checksum field	6.1	m	
c6501: IF A.68/1 OR A.70/1 OR A.72/1 THEN m ELSE x.				

Table A.66: Frame format type FA (Receiving FT to PT)

Prerequisite: A.64/1				
Item	**Frame elements**	**Ref.**	**Status**	**Support**
1	Address field	6.1	m	
2	Control field	6.1	m	
3	Length indicator field	6.1	m	
4	Information field	6.1	c6601	
5	Fill field	6.1	m	
6	Checksum field	6.1	m	
c6601: IF A.69/1 OR A.71/1 OR A.73/1 THEN m ELSE x.				

Table A.67: Broadcast service frame structure (Receiving FT to PT)

Prerequisite: A.64/2				
Item	**Frame elements**	**Ref.**	**Status**	**Support**
1	Short frame format (3 octets)	6.2.1	o.67	
2	Long frame format (5 octets)	6.2.1	o.67	
o.67: It is mandatory to support at least one of this options.				

A.5.3.1.2 C-plane messages

A.5.3.1.2.1 Message support

Table A.68: Class A messages support (Sending PT to FT)

Prerequisite: A.10/2				
Item	**Class A messages**	**Ref.**	**Status**	**Support**
1	I-command	7.11, 9.1	m	
2	RR-command/response	7.11, 9.1	m	

Table A.69: Class A messages support (Receiving FT to PT)

Prerequisite: A.10/2				
Item	**Class A messages**	**Ref.**	**Status**	**Support**
1	I-command	7.11, 9.1	m	
2	RR-command/response	7.11, 9.1	m	

Table A.70: Class B messages support (Sending PT to FT)

Prerequisite: A.10/3				
Item	**Class B messages**	**Ref.**	**Status**	**Support**
1	I-command	7.11, 9.1	m	
2	RR-command/response	7.11, 9.1	m	
3	RNR-command/response	7.11, 9.1	m	
4	REJ-command/response	7.11, 9.1	m	
5	SABM-command	7.11, 9.1	m	
6	DM-response	7.11, 9.1	m	
7	DISC-command	7.11, 9.1	m	
8	UA-response	7.11, 9.1	m	

Table A.71: Class B messages support (Receiving FT to PT)

Prerequisite: A.10/3				
Item	**Class B messages**	**Ref.**	**Status**	**Support**
1	I-command	7.11, 9.1	m	
2	RR-command/response	7.11, 9.1	m	
3	RNR-command/response	7.11, 9.1	m	
4	REJ-command/response	7.11, 9.1	m	
5	SABM-command	7.11, 9.1	m	
6	DM-response	7.11, 9.1	m	
7	DISC-command	7.11, 9.1	m	
8	UA-response	7.11, 9.1	m	

Table A.72: Class U messages support (Sending PT to FT)

Prerequisite: A.10/1				
Item	**Class U messages**	**Ref.**	**Status**	**Support**
1	UI-command	7.11, 9.1	m	

Table A.73: Class U messages support (Receiving FT to PT)

Prerequisite: A.10/1				
Item	**Class U messages**	**Ref.**	**Status**	**Support**
1	UI-command	7.11, 9.1	m	

A.5.3.1.2.2 Class A I-command

Table A.74: Class A I-command (Numbered Information) (Sending PT to FT)

Prerequisite: A.68/1				
Item	**I-command - Name of field**	**Ref.**	**Status**	**Supp.**
1	Address field	7.2	m	
2	Control field	7.4	m	
3	Length indicator field	7.6	m	
4	Information field	6.1	m	
5	Fill field	7.8	m	
6	Checksum field	7.9	m	

Table A.75: Class A I-command (Numbered Information) (Receiving FT to PT)

Prerequisite: A.68/1				
Item	**I-command - Name of field**	**Ref.**	**Status**	**Supp.**
1	Address field	7.2	m	
2	Control field	7.4	m	
3	Length indicator field	7.6	m	
4	Information field	6.1	m	
5	Fill field	7.8	m	
6	Checksum field	7.9	m	

Table A.76: Class A I-command Control field (Sending PT to FT)

Prerequisite: A.74/2						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	Spare field	7.4	m		'0'B	
2	N(S)	7.4, 7.5.2.4	m		'000'B to '001'B	
3	P	7.4, 7.5.1, 9.2.1.1	m		'0'B	
4	N(R)	7.4, 7.5.2.6	m		'000'B to '001'B	

Table A.77: Class A I-command Control field (Receiving FT to PT)

Prerequisite: A.75/2						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	Spare field	7.4	m		'0'B	
2	N(S)	7.4, 7.5.2.4	m		'000'B to '001'B	
3	P	7.4, 7.5.1, 9.2.1.1	m		'0'B	
4	N(R)	7.4, 7.5.2.6	m		'000'B to '001'B	

Table A.78: Class A I-command Address field (Sending PT to FT)

Prerequisite: A.74/1						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	RES	7.2, 7.3.1	m		'1'B	
2	C/R	7.2, 7.3.2	m		'0'B	
3	SAPI	7.2, 7.3.3	m		'00'B	
4	LLN	7.2, 7.3.5, 9.2.2.1	m		'001'B	
5	NLF	7.2, 7.3.4	m		'0'B, '1'B	

Table A.79: Class A I-command Address field (Receiving FT to PT)

Prerequisite: A.75/1						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	RES	7.2, 7.3.1	m		'1'B	
2	C/R	7.2, 7.3.2	m		'1'B	
3	SAPI	7.2, 7.3.3	m		'00'B	
4	LLN	7.2, 7.3.5, 9.2.2.1	m		'001'B	
5	NLF	7.2, 7.3.4	m		'0'B, '1'B	

A.5.3.1.2.3 Class A RR command/response

Table A.80: Class A RR-command/response (Receive ready) (Sending PT to FT)

Prerequisite: A.68/2				
Item	**RR-command/response - Name of field**	**Ref.**	**Status**	**Supp.**
1	Address field	7.2	m	
2	Control field	7.4	m	
3	Length indicator field	7.6	m	
4	Fill field	7.8	m	
5	Checksum field	7.9	m	

Table A.81: Class A RR-command/response (Receive ready) (Receiving FT to PT)

Prerequisite: A.69/2				
Item	**RR-command/response - Name of field**	**Ref.**	**Status**	**Supp.**
1	Address field	7.2	m	
2	Control field	7.4	m	
3	Length indicator field	7.6	m	
4	Fill field	7.8	m	
5	Checksum field	7.9	m	

Table A.82: Class A RR Control field (Sending PT to FT)

Prerequisite: A.80/2						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	Spare field	7.4	m		'01'B	
2	S bits	7.4, 7.11	m		'00'B	
3	P/F	7.4, 7.5.1, 9.2.1.1	m		'0'B	
4	N(R)	7.4, 7.5.2.4	m		'000'B to '001'B	

Table A.83: Class A RR Control field (Receiving FT to PT)

Prerequisite: A.81/2						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	Spare field	7.4	m		'01'B	
2	S bits	7.4, 7.11	m		'00'B	
3	P/F	7.4, 7.5.1, 9.2.1.1	m		'0'B	
4	N(R)	7.4, 7.5.2.4	m		'000'B to '001'B	

Table A.84: Class A RR Address field (Sending PT to FT)

Prerequisite: A.80/1						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	RES	7.2, 7.3.1	m		'1'B	
2	C/R	7.2, 7.3.2	m		'1'B	
3	SAPI	7.2, 7.3.3	m		'00'B	
4	LLN	7.2, 7.3.5, 9.2.2.1	m		'001'B	
5	NLF	7.2, 7.3.4	m		'0'B, '1'B	

Table A.85: Class A RR Address field (Receiving FT to PT)

Prerequisite: A.81/1						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	RES	7.2, 7.3.1	m		'1'B	
2	C/R	7.2, 7.3.2	m		'0'B	
3	SAPI	7.2, 7.3.3	m		'00'B	
4	LLN	7.2, 7.3.5, 9.2.2.1	m		'001'B	
5	NLF	7.2, 7.3.4	m		'0'B, '1'B	

A.5.3.1.2.4 Class B I-command

Table A.86: Class B I-command (Numbered Information) (Sending PT to FT)

Prerequisite: A.70/1				
Item	**I-command - Name of field**	**Ref.**	**Status**	**Supp.**
1	Address field	7.2	m	
2	Control field	7.4	m	
3	Length indicator field	7.6	m	
4	Information field	6.1	m	
5	Fill field	7.8	m	
6	Checksum field	7.9	m	

Table A.87: Class B I-command (Numbered Information) (Receiving FT to PT)

Prerequisite: A.71/1				
Item	**I-command - Name of field**	**Ref.**	**Status**	**Supp.**
1	Address field	7.2	m	
2	Control field	7.4	m	
3	Length indicator field	7.6	m	
4	Information field	6.1	m	
5	Fill field	7.8	m	
6	Checksum field	7.9	m	

Table A.88: Class B I-command Control field (Sending PT to FT)

Prerequisite: A.86/2						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	Spare field	7.4	m		'0'B	
2	N(S)	7.4, 7.5.2.4	m		'000'B to '111'B	
3	P	7.4, 7.5.1, 9.2.1.2	m		'0'B, '1'B	
4	N(R)	7.4, 7.5.2.6	m		'000'B to '111'B	

Table A.89: Class B I-command Control field (Receiving FT to PT)

Prerequisite: A.87/2						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	Spare field	7.4	m		'0'B	
2	N(S)	7.4, 7.5.2.4	m		'000'B to '111'B	
3	P	7.4, 7.5.1, 9.2.1.2	m		'0'B, '1'B	
4	N(R)	7.4, 7.5.2.6	m		'000'B to '111'B	

Table A.90: Class B I-command Address field (Sending PT to FT)

Prerequisite: A.86/1						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	RES	7.2, 7.3.1	m		'1'B	
2	C/R	7.2, 7.3.2	m		'0'B	
3	SAPI	7.2, 7.3.3	m		'00'B	
4	LLN	7.2, 7.3.5, 9.2.2.2	m		'010'B to '110'B	
5	NLF	7.2, 7.3.4	m		'0'B, '1'B	

Table A.91: Class B I-command Address field (Receiving FT to PT)

Prerequisite: A.87/1						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	RES	7.2, 7.3.1	m		'1'B	
2	C/R	7.2, 7.3.2	m		'1'B	
3	SAPI	7.2, 7.3.3	m		'00'B	
4	LLN	7.2, 7.3.5, 9.2.2.2	m		'010'B to '111'B	
5	NLF	7.2, 7.3.4	m		'0'B, '1'B	

A.5.3.1.2.5 Class B RR command/response

Table A.92: Class B RR-command/response (Receive ready) (Sending PT to FT)

Prerequisite: A.70/2				
Item	**RR-command/response - Name of field**	**Ref.**	**Status**	**Supp.**
1	Address field	7.2	m	
2	Control field	7.4	m	
3	Length indicator field	7.6	m	
4	Fill field	7.8	m	
5	Checksum field	7.9	m	

Table A.93: Class B RR-command/response (Receive ready) (Receiving FT to PT)

Prerequisite: A.71/2				
Item	**RR-command/response - Name of field**	**Ref.**	**Status**	**Supp.**
1	Address field	7.2	m	
2	Control field	7.4	m	
3	Length indicator field	7.6	m	
4	Fill field	7.8	m	
5	Checksum field	7.9	m	

Table A.94: Class B RR Control field (Sending PT to FT)

Prerequisite: A.92/2						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	Spare field	7.4	m		'01'B	
2	S bits	7.4, 7.11	m		'00'B	
3	P/F	7.4, 7.5.1, 9.2.1.2	m		'0'B, '1'B	
4	N(R)	7.4, 7.5.2.6	m		'000'B to '111'B	

Table A.95: Class B RR Control field (Receiving FT to PT)

Prerequisite: A.93/2						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	Spare field	7.4	m		'01'B	
2	S bits	7.4, 7.11	m		'00'B	
3	P/F	7.4, 7.5.1, 9.2.1.2	m		'0'B, '1'B	
4	N(R)	7.4, 7.5.2.6	m		'000'B to '111'B	

Table A.96: Class B RR Address field (Sending PT to FT)

Prerequisite: A.92/1						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	RES	7.2, 7.3.1	m		'1'B	
2	C/R	7.2, 7.3.2	m		'0'B, '1'B	
3	SAPI	7.2, 7.3.3	m		'00'B	
4	LLN	7.2, 7.3.5, 9.2.2.2	m		'010'B to '111'B	
5	NLF	7.2, 7.3.4	m		'0'B, '1'B	

Table A.97: Class B RR Address field (Receiving FT to PT)

Prerequisite: A.93/1						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	RES	7.2, 7.3.1	m		'1'B	
2	C/R	7.2, 7.3.2	m		'0'B, '1'B	
3	SAPI	7.2, 7.3.3	m		'00'B	
4	LLN	7.2, 7.3.5, 9.2.2.2	m		'010'B to '111'B	
5	NLF	7.2, 7.3.4	m		'0'B, '1'B	

A.5.3.1.2.6 Class B RNR command/response

Table A.98: Class B RNR command/response (Receive Not Ready) (Sending PT to FT)

Prerequisite: A.70/3				
Item	**RNR-command/response - Name of field**	**Ref.**	**Status**	**Supp.**
1	Address field	7.2	m	
2	Control field	7.4	m	
3	Length indicator field	7.6	m	
4	Fill field	7.8	m	
5	Checksum field	7.9	m	

Table A.99: Class B RNR command/response (Receive Not Ready) (Receiving FT to PT)

Prerequisite: A.71/3				
Item	**RNR-command/response - Name of field**	**Ref.**	**Status**	**Supp.**
1	Address field	7.2	m	
2	Control field	7.4	m	
3	Length indicator field	7.6	m	
4	Fill field	7.8	m	
5	Checksum field	7.9	m	

Table A.100: Class B RNR Control field (Sending PT to FT)

Prerequisite: A.98/2						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	Spare field	7.4	m		'01'B	
2	S bits	7.4, 7.11	m		'01'B	
3	P/F	7.4, 7.5.1, 9.2.1.2	m		'0'B, '1'B	
4	N(R)	7.4, 7.5.2.6	m		'000'B to '111'B	

Table A.101: Class B RNR Control field (Receiving FT to PT)

Prerequisite: A.99/2						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	Spare field	7.4	m		'01'B	
2	S bits	7.4, 7.11	m		'01'B	
3	P/F	7.4, 7.5.1, 9.2.1.2	m		'0'B, '1'B	
4	N(R)	7.4, 7.5.2.6	m		'000'B to '111'B	

Table A.102: Class B RNR Address field (Sending PT to FT)

Prerequisite: A.98/1						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	RES	7.2, 7.3.1	m		'1'B	
2	C/R	7.2, 7.3.2	m		'0'B, '1'B	
3	SAPI	7.2, 7.3.3	m		'00'B	
4	LLN	7.2, 7.3.5, 9.2.2.2	m		'010'B to '111'B	
5	NLF	7.2, 7.3.4	m		'0'B, '1'B	

Table A.103: Class B RNR Address field (Receiving FT to PT)

Prerequisite: A.99/1						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	RES	7.2, 7.3.1	m		'1'B	
2	C/R	7.2, 7.3.2	m		'0'B, '1'B	
3	SAPI	7.2, 7.3.3	m		'00'B	
4	LLN	7.2, 7.3.5, 9.2.2.2	m		'010'B to '111'B	
5	NLF	7.2, 7.3.4	m		'0'B, '1'B	

A.5.3.1.2.7 Class B REJ command/response

Table A.104: Class B REJ command/response (Reject) (Sending PT to FT)

Prerequisite: A.70/4				
Item	**REJ-command/response - Name of field**	**Ref.**	**Status**	**Supp.**
1	Address field	7.2	m	
2	Control field	7.4	m	
3	Information field	6.1	m	
4	Fill field	7.8	m	
5	Checksum field	7.9	m	

Table A.105: Class B REJ command/response (Reject) (Receiving FT to PT)

Prerequisite: A.71/4				
Item	**REJ-command/response - Name of field**	**Ref.**	**Status**	**Supp.**
1	Address field	7.2	m	
2	Control field	7.4	m	
3	Information field	6.1	m	
4	Fill field	7.8	m	
5	Checksum field	7.9	m	

Table A.106: Class B REJ Control field (Sending PT to FT)

Prerequisite: A.104/2						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	Spare field	7.4	m		'01'B	
2	S bits	7.4, 7.11	m		'10'B	
3	P/F	7.4, 7.5.1, 9.2.1.2	m		'0'B, '1'B	
4	N(R)	7.4, 7.5.2.6	m		'000'B to '111'B	

Table A.107: Class B REJ Control field (Receiving FT to PT)

Prerequisite: A.105/2						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	Spare field	7.4	m		'01'B	
2	S bits	7.4, 7.11	m		'10'B	
3	P/F	7.4, 7.5.1, 9.2.1.2	m		'0'B, '1'B	
4	N(R)	7.4, 7.5.2.6	m		'000'B to '111'B	

Table A.108: Class B REJ Address field (Sending PT to FT)

Prerequisite: A.104/1						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	RES	7.2, 7.3.1	m		'1'B	
2	C/R	7.2, 7.3.2	m		'0'B, '1'B	
3	SAPI	7.2, 7.3.3	m		'00'B	
4	LLN	7.2, 7.3.5, 9.2.2.2	m		'010'B to '111'B	
5	NLF	7.2, 7.3.4	m		'0'B, '1'B	

Table A.109: Class B REJ Address field (Receiving FT to PT)

Prerequisite: A.105/1						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	RES	7.2, 7.3.1	m		'1'B	
2	C/R	7.2, 7.3.2	m		'0'B, '1'B	
3	SAPI	7.2, 7.3.3	m		'00'B	
4	LLN	7.2, 7.3.5, 9.2.2.2	m		'010'B to '111'B	
5	NLF	7.2, 7.3.4	m		'0'B, '1'B	

A.5.3.1.2.8 Class B SABM command

Table A.110: Class B SABM command (Set Asynchronous Balanced Mode) (Sending PT to FT)

Prerequisite: A.70/5				
Item	**SABM-command - Name of field**	**Ref.**	**Status**	**Supp.**
1	Address field	7.2	m	
2	Control field	7.4	m	
3	Length indicator field	7.6	m	
4	Fill field	7.8	m	
5	Checksum field	7.9	m	

Table A.111: Class B SABM command (Set Asynchronous Balanced Mode) (Receiving FT to PT)

Prerequisite: A.71/5				
Item	**SABM-command - Name of field**	**Ref.**	**Status**	**Supp.**
1	Address field	7.2	m	
2	Control field	7.4	m	
3	Length indicator field	7.6	m	
4	Fill field	7.8	m	
5	Checksum field	7.9	m	

Table A.112: Class B SABM Control field (Sending PT to FT)

Prerequisite: A.110/2						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	Spare field	7.4	m		'11'B	
2	U bits part 1	7.4, 7.11	m		'11'B	
3	P	7.4, 7.5.1, 9.2.1.2	m		'1'B	
4	U bits part 2	7.4, 7.11	m		'001'B	

Table A.113: Class B SABM Control field (Receiving FT to PT)

Prerequisite: A.111/2						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	Spare field	7.4	m		'11'B	
2	U bits part 1	7.4, 7.11	m		'11'B	
3	P	7.4, 7.5.1, 9.2.1.2	m		'1'B	
4	U bits part 2	7.4, 7.11	m		'001'B	

Table A.114: Class B SABM Address field (Sending PT to FT)

Prerequisite: A.110/1						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	RES	7.2, 7.3.1	m		'1'B	
2	C/R	7.2, 7.3.2	m		'0'B	
3	SAPI	7.2, 7.3.3	m		'00'B	
4	LLN	7.2, 7.3.5, 9.2.2.2	m		'010'B to '110'B	
5	NLF	7.2, 7.3.4	m		'0'B, '1'B	

Table A.115: Class B SABM Address field (Receiving FT to PT)

Prerequisite: A.111/1						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	RES	7.2, 7.3.1	m		'1'B	
2	C/R	7.2, 7.3.2	m		'1'B	
3	SAPI	7.2, 7.3.3	m		'00'B	
4	LLN	7.2, 7.3.5, 9.2.2.2	m		'010'B to '110'B	
5	NLF	7.2, 7.3.4	m		'0'B, '1'B	

A.5.3.1.2.9 Class B DM response

Table A.116: Class B DM-response (Disconnect Mode) (Sending PT to FT)

Prerequisite: A.70/6				
Item	**DM-response - Name of field**	**Ref.**	**Status**	**Supp.**
1	Address field	7.2	m	
2	Control field	7.4	m	
3	Length indicator field	7.6	m	
4	Fill field	7.8	m	
5	Checksum field	7.9	m	

Table A.117: Class B DM-response (Disconnect Mode) (Receiving FT to PT)

Prerequisite: A.71/6				
Item	**DM-response - Name of field**	**Ref.**	**Status**	**Supp.**
1	Address field	7.2	m	
2	Control field	7.4	m	
3	Length indicator field	7.6	m	
4	Fill field	7.8	m	
5	Checksum field	7.9	m	

Table A.118: Class B DM Control field (Sending PT to FT)

Prerequisite: A.116/2						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	Spare field	7.4	m		'11'B	
2	U bits part 1	7.4, 7.11	m		'11'B	
3	F	7.4, 7.5.1, 9.2.1.2	m		'0'B, '1'B	
4	U bits part 2	7.4, 7.11	m		'000'B	

Table A.119: Class B DM Control field (Receiving FT to PT)

Prerequisite: A.117/2						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	Spare field	7.4	m		'11'B	
2	U bits part 1	7.4, 7.11	m		'11'B	
3	F	7.4, 7.5.1, 9.2.1.2	m		'0'B, '1'B	
4	U bits part 2	7.4, 7.11	m		'000'B	

Table A.120: Class B DM Address field (Sending PT to FT)

Prerequisite: A.116/1						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	RES	7.2, 7.3.1	m		'1'B	
2	C/R	7.2, 7.3.2	m		'1'B	
3	SAPI	7.2, 7.3.3	m		'00'B	
4	LLN	7.2, 7.3.5, 9.2.2.2	m		'010'B to '111'B	
5	NLF	7.2, 7.3.4	m		'0'B, '1'B	

Table A.121: Class B DM Address field (Receiving FT to PT)

Prerequisite: A.117/1						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	RES	7.2, 7.3.1	m		'1'B	
2	C/R	7.2, 7.3.2	m		'0'B	
3	SAPI	7.2, 7.3.3	m		'00'B	
4	LLN	7.2, 7.3.5, 9.2.2.2	m		'010'B to '111'B	
5	NLF	7.2, 7.3.4	m		'0'B, '1'B	

A.5.3.1.2.10 Class B DISC command

Table A.122: Class B DISC command (Disconnect) (Sending PT to FT)

Prerequisite: A.70/7				
Item	**DISC-command - Name of field**	**Ref.**	**Status**	**Supp.**
1	Address field	7.2	m	
2	Control field	7.4	m	
3	Length indicator field	7.6	m	
4	Fill field	7.8	m	
5	Checksum field	7.9	m	

Table A.123: Class B DISC command (Disconnect) (Receiving FT to PT)

Prerequisite: A.71/7				
Item	**DISC-command - Name of field**	**Ref.**	**Status**	**Supp.**
1	Address field	7.2	m	
2	Control field	7.4	m	
3	Length indicator field	7.6	m	
4	Fill field	7.8	m	
5	Checksum field	7.9	m	

Table A.124: Class B DISC Control field (Sending PT to FT)

Prerequisite: A.122/2						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	Spare field	7.4	m		'11'B	
2	U bits part 1	7.4, 7.11	m		'00'B	
3	P	7.4, 7.5.1, 9.2.1.2	m		'0'B, '1'B	
4	U bits part 2	7.4, 7.11	m		'010'B	

Table A.125: Class B DISC Control field (Receiving FT to PT)

Prerequisite: A.123/2						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	Spare field	7.4	m		'11'B	
2	U bits part 1	7.4, 7.11	m		'00'B	
3	P	7.4, 7.5.1, 9.2.1.2	m		'0'B, '1'B	
4	U bits part 2	7.4, 7.11	m		'010'B	

Table A.126: Class B DISC Address field (Sending PT to FT)

Prerequisite: A.122/1						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	RES	7.2, 7.3.1	m		'1'B	
2	C/R	7.2, 7.3.2	m		'0'B	
3	SAPI	7.2, 7.3.3	m		'00'B	
4	LLN	7.2, 7.3.5, 9.2.2.2	m		'010'B to '111'B	
5	NLF	7.2, 7.3.4	m		'0'B, '1'B	

Table A.127: Class B DISC Address field (Receiving FT to PT)

Prerequisite: A.123/1						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	RES	7.2, 7.3.1	m		'1'B	
2	C/R	7.2, 7.3.2	m		'1'B	
3	SAPI	7.2, 7.3.3	m		'00'B	
4	LLN	7.2, 7.3.5, 9.2.2.2	m		'010'B to '111'B	
5	NLF	7.2, 7.3.4	m		'0'B, '1'B	

A.5.3.1.2.11 Class B UA response

Table A.128: Class B UA-response (Unnumbered ACK) (Sending PT to FT)

Prerequisite: A.70/8				
Item	**UA-response - Name of field**	**Ref.**	**Status**	**Supp.**
1	Address field	7.2	m	
2	Control field	7.4	m	
3	Length indicator field	7.6	m	
4	Fill field	7.8	m	
5	Checksum field	7.9	m	

Table A.129: Class B UA-response (Unnumbered ACK) (Receiving FT to PT)

Prerequisite: A.71/8				
Item	**UA-response - Name of field**	**Ref.**	**Status**	**Supp.**
1	Address field	7.2	m	
2	Control field	7.4	m	
3	Length indicator field	7.6	m	
4	Fill field	7.8	m	
5	Checksum field	7.9	m	

Table A.130: Class B UA Control field (Sending PT to FT)

Prerequisite: A.128/2						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	Spare field	7.4	m		'11'B	
2	U bits part 1	7.4, 7.11	m		'00'B	
3	F	7.4, 7.5.1, 9.2.1.2	m		'0'B, '1'B	
4	U bits part 2	7.4, 7.11	m		'011'B	

Table A.131: Class B UA Control field (Receiving FT to PT)

Prerequisite: A.129/2						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	Spare field	7.4	m		'11'B	
2	U bits part 1	7.4, 7.11	m		'00'B	
3	F	7.4, 7.5.1, 9.2.1.2	m		'0'B, '1'B	
4	U bits part 2	7.4, 7.11	m		'011'B	

Table A.132: Class B UA Address field (Sending PT to FT)

Prerequisite: A.128/1						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	RES	7.2, 7.3.1	m		'1'B	
2	C/R	7.2, 7.3.2	m		'1'B	
3	SAPI	7.2, 7.3.3	m		'00'B	
4	LLN	7.2, 7.3.5, 9.2.2.2	m		'010'B to '111'B	
5	NLF	7.2, 7.3.4	m		'0'B, '1'B	

Table A.133: Class B UA Address field (Receiving FT to PT)

Prerequisite: A.129/1						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	RES	7.2, 7.3.1	m		'1'B	
2	C/R	7.2, 7.3.2	m		'0'B	
3	SAPI	7.2, 7.3.3	m		'00'B	
4	LLN	7.2, 7.3.5, 9.2.2.2	m		'010'B to '111'B	
5	NLF	7.2, 7.3.4	m		'0'B, '1'B	

A.5.3.1.2.12 Class U UI command

Table A.134: Class U UI command (Unnumbered Information) (Sending PT to FT)

Prerequisite: A.72/1				
Item	**UI-command - Name of field**	**Ref.**	**Status**	**Supp.**
1	Address field	7.2	m	
2	Control field	7.4	m	
3	Length indicator field	7.6	m	
4	Information field	6.1	m	
5	Fill field	7.8	m	
6	Checksum field	7.9	m	

Table A.135: Class U UI command (Unnumbered Information) (Receiving FT to PT)

Prerequisite: A.73/1				
Item	**UI-command - Name of field**	**Ref.**	**Status**	**Supp.**
1	Address field	7.2	m	
2	Control field	7.4	m	
3	Length indicator field	7.6	m	
4	Information field	6.1	m	
5	Fill field	7.8	m	
6	Checksum field	7.9	m	

Table A.136: Class U UI Control field (Sending PT to FT)

Prerequisite: A.134/2						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	Spare field	7.4	m		'11'B	
2	U bits part 1	7.4, 7.11	m		'00'B	
3	P	7.4, 7.5.1, 9.3.3.1	m		'0'B	
4	U bits part 2	7.4, 7.11	m		'000'B	

Table A.137: Class U UI Control field (Receiving FT to PT)

Prerequisite: A.135/2						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	Spare field	7.4	m		'11'B	
2	U bits part 1	7.4, 7.11	m		'00'B	
3	P	7.4, 7.5.1, 9.3.3.1	m		'0'B	
4	U bits part 2	7.4, 7.11	m		'000'B	

Table A.138: Class U UI Address field (Sending PT to FT)

Prerequisite: A.134/1						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	RES	7.2, 7.3.1	m		'1'B	
2	C/R	7.2, 7.3.2	m		'0'B	
3	SAPI	7.2, 7.3.3	m		'00'B, '11'B	
4	LLN	7.2, 7.3.5	m		'000'B	
5	NLF	7.2, 7.3.4, 9.3.3.1	m		'0'B	

Table A.139: Class U UI Address field (Receiving FT to PT)

Prerequisite: A.135/1						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	RES	7.2, 7.3.1	m		'1'B	
2	C/R	7.2, 7.3.2	m		'1'B	
3	SAPI	7.2, 7.3.3	m		'00'B, '11'B	
4	LLN	7.2, 7.3.5	m		'000'B	
5	NLF	7.2, 7.3.4, 9.3.3.1	m		'0'B	

A.5.3.2 U-plane PDUs

Table A.140: U-plane frames (Sending PT to FT)

Prerequisite: A.9/2				
Item	**U-plane frames**	**Ref.**	**Status**	**Support**
1	FU1 frame structure	12.2.1	c14001	
2	FU2 frame structure	12.3.1	c14002	
3	FU3 frame structure	12.4.1	c14003	
4	FU4 frame structure	12.5.1	c14004	
5	FU5 frame structure	12.6.1	c14005	
6	FU6 frame structure	12.7.1	c14006	
7	FU7 frame structure	11.9.4.2	c14007	
8	FU8 frame structure	11.10.3	c14008	
9	FU9 frame structure	11.11.1.1.1	c14009	
10	FU10 frame structure	12.11.1	c14010	
c14001: IF A.44/1 OR A.50/1 THEN m else n/a. c14002: The use of this frame is for future application. c14003: The use of this frame is for future application. c14004: IF A.47/1 THEN m else n/a. c14005: IF A.47/2 OR A.50/2 THEN m else n/a. c14006: IF A.47/3 THEN m else n/a. c14007: IF A.53/1 THEN m else n/a. c14008: IF A.55/1 THEN m else n/a. c14009: IF A.57/1 THEN m else n/a. c14010: IF A.60/1 THEN m else n/a.				

Table A.141: U-plane frames (Receiving FT to PT)

Prerequisite: A.9/2				
Item	**U-plane frames**	**Ref.**	**Status**	**Support**
1	FU1 frame structure	12.2.1	c14101	
2	FU2 frame structure	12.3.1	c14102	
3	FU3 frame structure	12.4.1	c14103	
4	FU4 frame structure	12.5.1	c14104	
5	FU5 frame structure	12.6.1	c14105	
6	FU6 frame structure	12.7.1	c14106	
7	FU7 frame structure	11.9.4.2	c14107	
8	FU8 frame structure	11.10.3	c14108	
9	FU9 frame structure	11.11.1.1.1	c14109	
10	FU10 frame structure	12.11.1	c14110	
c14101: IF A.44/1 OR A.50/1 THEN m else n/a. c14102: The use of this frame is for future application. c14103: The use of this frame is for future application. c14104: IF A.47/1 THEN m else n/a. c14105: IF A.47/2 OR A.50/2 THEN m else n/a. c14106: IF A.47/3 THEN m else n/a. c14107: IF A.53/1 THEN m else n/a. c14108: IF A.55/1 THEN m else n/a. c14109: IF A.57/1 THEN m else n/a. c14110: IF A.60/1 THEN m else n/a.				

A.5.3.2.1 FU1 frame structure

Table A.142: FU1 frame structure (Sending PT to FT)

Prerequisite: A.140/1				
Item	**FU1 frame structure - Name of field**	**Ref.**	**Status**	**Supp.**
1	Higher layer information	12.2.1	m	

Table A.143: FU1 frame structure (Receiving FT to PT)

Prerequisite: A.141/1				
Item	**FU1 frame structure - Name of field**	**Ref.**	**Status**	**Supp.**
1	Higher layer information	12.2.1	m	

A.5.3.2.2 FU2 frame structure

Table A.144: FU2 frame structure (Sending PT to FT)

Prerequisite: A.140/2				
Item	**FU2 frame structure - Name of field**	**Ref.**	**Status**	**Supp.**
1	Address field	12.3.1, 13.2.1	m	
2	Length indicator field	12.3.1, 13.3.2	m	
3	Information field	12.3.1	m	
4	Fill field	13.5	m	

Table A.145: FU2 frame structure (Receiving FT to PT)

Prerequisite: A.141/2				
Item	**FU2 frame structure - Name of field**	**Ref.**	**Status**	**Supp.**
1	Address field	12.3.1, 13.2.1	m	
2	Length indicator field	12.3.1, 13.3.2	m	
3	Information field	12.3.1	m	
4	Fill field	13.5	m	

Table A.146: FU2 Address field (Sending PT to FT)

Prerequisite: A.144/1						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	Spare field	13.2	m		'1'B	
2	UCN (U-plane Channel Number)	13.2	m		'000'B to '110'B	
3	ULN (U-plane Link Number)	13.2	m		'000'B to '110'B	
4	G (flaG)	13.2	m		'0'B, '1"B	

Table A.147: FU2 Address field (Receiving FT to PT)

Prerequisite: A.145/1						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	Spare field	13.2	m		'1'B	
2	UCN (U-plane Channel Number)	13.2	m		'000'B to '110'B	
3	ULN (U-plane Link Number)	13.2	m		'000'B to '110'B	
4	G (flaG)	13.2	m		'0'B, '1"B	

Table A.148: FU2 Length indicator field (Sending PT to FT)

Prerequisite: A.144/2						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	M (more data bit)	13.3.2	m		'0'B, '1'B	
2	Length of information field	13.3.2	m		7 bits value	

Table A.149: FU2 Length indicator field (Receiving FT to PT)

Prerequisite: A.145/2						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	M (more data bit)	13.3.2	m		'0'B, '1'B	
2	Length of information field	13.3.2	m		7 bits value	

A.5.3.2.3 FU3a frame structure

Table A.150: FU3a frame structure (Sending PT to FT)

Prerequisite: A.140/3				
Item	**FU3a frame structure - Name of field**	**Ref.**	**Status**	**Supp.**
1	Send sequence number	12.4.1, 13.4.1	m	
2	Receive sequence number	12.4.1, 13.4.3	m	
3	Information field	12.4.1	m	

Table A.151: FU3a frame structure (Receiving FT to PT)

Prerequisite: A.141/3				
Item	**FU3a frame structure - Name of field**	**Ref.**	**Status**	**Supp.**
1	Send sequence number	12.4.1, 13.4.1	m	
2	Receive sequence number	12.4.1, 13.4.3	m	
3	Information field	12.4.1	m	

Table A.152: FU3a Send sequence number (Sending PT to FT)

Prerequisite: A.150/1						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	ESi	13.4.1, 13.4.2, 14.2, 14.3	m		7 bits value	
2	I/R bit	13.4.1, 13.4.2	m		'0'B, '1'B	

Table A.153: FU3a Send sequence number (Receiving FT to PT)

Prerequisite: A.151/1						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	ESi	13.4.1, 13.4.2, 14.2, 14.3	m		7 bits value	
2	I/R bit	13.4.1, 13.4.2	m		'0'B, '1'B	

Table A.154: FU3a Receive sequence number (Sending PT to FT)

Prerequisite: A.150/2						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	Eri	13.4.3, 13.4.4, 14.2, 14.3	m		7 bits value	
2	A/N bit	13.4.3, 13.4.4	m		'0'B, '1'B	

Table A.155: FU3a Receive sequence number (Receiving FT to PT)

Prerequisite: A.151/2						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	ERi	13.4.3, 13.4.4, 14.2, 14.3	m		7 bits value	
2	A/N bit	13.4.3, 13.4.4	m		'0'B, '1'B	

A.5.3.2.4 FU3b frame structure

Table A.156: FU3b frame structure (Sending PT to FT)

Prerequisite: A.140/3				
Item	**FU3b frame structure - Name of field**	**Ref.**	**Status**	**Supp.**
1	#1 Receive sequence number	12.4.1, 13.4.3	m	
2	#2 Receive sequence number	12.4.1, 13.4.3	m	
3	#3 Receive sequence number	12.4.1, 13.4.3	m	
4	#4 Receive sequence number	12.4.1, 13.4.3	m	
5	#5 Receive sequence number	12.4.1, 13.4.3	m	
6	#6 Receive sequence number	12.4.1, 13.4.3	m	
7	#7 Receive sequence number	12.4.1, 13.4.3	m	

Table A.157: FU3b frame structure (Receiving FT to PT)

Prerequisite: A.141/3				
Item	**FU3b frame structure - Name of field**	**Ref.**	**Status**	**Supp.**
1	#1 Receive sequence number	12.4.1, 13.4.3	m	
2	#2 Receive sequence number	12.4.1, 13.4.3	m	
3	#3 Receive sequence number	12.4.1, 13.4.3	m	
4	#4 Receive sequence number	12.4.1, 13.4.3	m	
5	#5 Receive sequence number	12.4.1, 13.4.3	m	
6	#6 Receive sequence number	12.4.1, 13.4.3	m	
7	#7 Receive sequence number	12.4.1, 13.4.3	m	

Table A.158: FU3b Receive sequence number (Sending PT to FT)

Prerequisite: A.156/1 TO A.156/7						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	Eri	13.4.3, 13.4.4, 14.2, 14.3	m		7 bits value	
2	A/N bit	13.4.3, 13.4.4	m		'0'B, '1'B	

Table A.159: FU3b Receive sequence number (Receiving FT to PT)

Prerequisite: A.157/1 TO A.157/7						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	ERi	13.4.3, 13.4.4, 14.2, 14.3	m		7 bits value	
2	A/N bit	13.4.3, 13.4.4	m		'0'B, '1'B	

A.5.3.2.5 FU4a frame structure

Table A.160: FU4a frame structure (Sending PT to FT)

Prerequisite: A.140/4				
Item	**FU4a frame structure - Name of field**	**Ref.**	**Status**	**Supp.**
1	Length indicator field	12.5.1, 13.3.2	m	
2	Send sequence number	12.5.1, 13.4.1	m	
3	Receive sequence number	12.5.1, 13.4.3	m	
4	Information field	12.5.1	m	
5	Fill field	13.5	m	

Table A.161: FU4a frame structure (Receiving FT to PT)

Prerequisite: A.141/4				
Item	**FU4a frame structure - Name of field**	**Ref.**	**Status**	**Supp.**
1	Length indicator field	12.5.1, 13.3.2	m	
2	Send sequence number	12.5.1, 13.4.1	m	
3	Receive sequence number	12.5.1, 13.4.3	m	
4	Information field	12.5.1	m	
5	Fill field	13.5	m	

Table A.162: FU4a Length indicator field (Sending PT to FT)

Prerequisite: A.160/1						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	M (more data bit)	13.3.2	m		'0'B, '1'B	
2	Length of information field	13.3.2	m		7 bits value	

Table A.163: FU4a Length indicator field (Receiving FT to PT)

Prerequisite: A.161/1						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	M (more data bit)	13.3.2	m		'0'B, '1'B	
2	Length of information field	13.3.2	m		7 bits value	

Table A.164: FU4a Send sequence number (Sending PT to FT)

Prerequisite: A.160/2						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	ESi	13.4.1, 13.4.2, 14.2, 14.3	m		7 bits value	
2	I/R bit	13.4.1, 13.4.2	m		'0'B, '1'B	

Table A.165: FU4a Send sequence number (Receiving FT to PT)

Prerequisite: A.161/2						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	ESi	13.4.1, 13.4.2, 14.2, 14.3	m		7 bits value	
2	I/R bit	13.4.1, 13.4.2	m		'0'B, '1'B	

Table A.166: FU4a Receive sequence number (Sending PT to FT)

Prerequisite: A.160/3						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	ERi	13.4.3, 13.4.4, 14.2, 14.3	m		7 bits value	
2	A/N bit	13.4.3, 13.4.4	m		'0'B, '1'B	

Table A.167: FU4a Receive sequence number (Receiving FT to PT)

Prerequisite: A.161/3						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	ERi	13.4.3, 13.4.4, 14.2, 14.3	m		7 bits value	
2	A/N bit	13.4.3, 13.4.4	m		'0'B, '1'B	

A.5.3.2.6 FU4b frame structure

Table A.168: FU4b frame structure (Sending PT to FT)

Prerequisite: A.140/4				
Item	**FU4b frame structure - Name of field**	**Ref.**	**Status**	**Supp.**
1	#1 Receive sequence number	12.5.1, 13.4.3	m	
2	#2 Receive sequence number	12.5.1, 13.4.3	m	
3	#3 Receive sequence number	12.5.1, 13.4.3	m	
4	#4 Receive sequence number	12.5.1, 13.4.3	m	
5	#5 Receive sequence number	12.5.1, 13.4.3	m	
6	#6 Receive sequence number	12.5.1, 13.4.3	m	
7	#7 Receive sequence number	12.5.1, 13.4.3	m	

Table A.169: FU4b frame structure (Receiving FT to PT)

Prerequisite: A.141/4				
Item	**FU4b frame structure - Name of field**	**Ref.**	**Status**	**Supp.**
1	#1 Receive sequence number	12.5.1, 13.4.3	m	
2	#2 Receive sequence number	12.5.1, 13.4.3	m	
3	#3 Receive sequence number	12.5.1, 13.4.3	m	
4	#4 Receive sequence number	12.5.1, 13.4.3	m	
5	#5 Receive sequence number	12.5.1, 13.4.3	m	
6	#6 Receive sequence number	12.5.1, 13.4.3	m	
7	#7 Receive sequence number	12.5.1, 13.4.3	m	

Table A.170: FU4b Receive sequence number (Sending PT to FT)

Prerequisite: A.168/1 TO A.168/7						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	Eri	13.4.3, 13.4.4, 14.2, 14.3	m		7 bits value	
2	A/N bit	13.4.3, 13.4.4	m		'0'B, '1'B	

Table A.171: FU4b Receive sequence number (Receiving FT to PT)

Prerequisite: A.169/1 TO A.169/7						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	Eri	13.4.3, 13.4.4, 14.2, 14.3	m		7 bits value	
2	A/N bit	13.4.3, 13.4.4	m		'0'B, '1'B	

A.5.3.2.7 FU5a frame structure

Table A.172: FU5a frame structure (Sending PT to FT)

Prerequisite: A.140/5				
Item	**FU5a frame structure - Name of field**	**Ref.**	**Status**	**Supp.**
1	Address field	12.6.1, 13.2.1	m	
2	Length indicator field	12.6.1, 13.3.2	m	
3	Send sequence number	12.6.1, 13.4.1	m	
4	Receive sequence number	12.6.1, 13.4.3	m	
5	Information field	12.6.1	m	
6	Fill field	13.5	m	

Table A.173: FU5a frame structure (Receiving FT to PT)

Prerequisite: A.141/5				
Item	**FU5a frame structure - Name of field**	**Ref.**	**Status**	**Supp.**
1	Address field	12.6.1, 13.2.1	m	
2	Length indicator field	12.6.1, 13.3.2	m	
3	Send sequence number	12.6.1, 13.4.1	m	
4	Receive sequence number	12.6.1, 13.4.3	m	
5	Information field	12.6.1	m	
6	Fill field	13.5	m	

Table A.174: FU5a Address field (Sending PT to FT)

Prerequisite: A.172/1						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	Spare field	13.2	m		'1'B	
2	UCN (U-plane Channel Number)	13.2	m		'000'B to '110'B	
3	ULN (U-plane Link Number)	13.2	m		'000'B to '110'B	
4	G (flaG)	13.2	m		'0'B, '1'B	

Table A.175: FU5a Address field (Receiving FT to PT)

Prerequisite: A.173/1						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	Spare field	13.2	m		'1'B	
2	UCN (U-plane Channel Number)	13.2	m		'000'B to '110'B	
3	ULN (U-plane Link Number)	13.2	m		'000'B to '110'B	
4	G (flaG)	13.2	m		'0'B, '1'B	

Table A.176: FU5a Length indicator field (Sending PT to FT)

Prerequisite: A.172/2						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	M (more data bit)	13.3.2	m		'0'B, '1'B	
2	Length of information field	13.3.2	m		7 bits value	

Table A.177: FU5a Length indicator field (Receiving FT to PT)

Prerequisite: A.173/2						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	M (more data bit)	13.3.2	m		'0'B, '1'B	
2	Length of information field	13.3.2	m		7 bits value	

Table A.178: FU5a Send sequence number (Sending PT to FT)

Prerequisite: A.172/3						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	ESi	13.4.1, 13.4.2, 14.2, 14.3	m		7 bits value	
2	I/R bit	13.4.1, 13.4.2	m		'0'B, '1'B	

Table A.179: FU5a Send sequence number (Receiving FT to PT)

Prerequisite: A.173/3						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	ESi	13.4.1, 13.4.2, 14.2, 14.3	m		7 bits value	
2	I/R bit	13.4.1, 13.4.2	m		'0'B, '1'B	

Table A.180: FU5a Receive sequence number (Sending PT to FT)

Prerequisite: A.172/4						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	ERi	13.4.3, 13.4.4, 14.2, 14.3	m		7 bits value	
2	A/N bit	13.4.3, 13.4.4	m		'0'B, '1'B	

Table A.181: FU5a Receive sequence number (Receiving FT to PT)

Prerequisite: A.173/4						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	ERi	13.4.3, 13.4.4, 14.2, 14.3	m		7 bits value	
2	A/N bit	13.4.3, 13.4.4	m		'0'B, '1'B	

A.5.3.2.8 FU5b frame structure

Table A.182: FU5b frame structure (Sending PT to FT)

Prerequisite: A.140/5				
Item	**FU5b frame structure - Name of field**	**Ref.**	**Status**	**Supp.**
1	Address field	12.6.1, 13.2.1	m	
2	#1 Receive sequence number	12.6.1, 13.4.3	m	
3	#2 Receive sequence number	12.6.1, 13.4.3	m	
4	#3 Receive sequence number	12.6.1, 13.4.3	m	
5	#4 Receive sequence number	12.6.1, 13.4.3	m	
6	#5 Receive sequence number	12.6.1, 13.4.3	m	
7	#6 Receive sequence number	12.6.1, 13.4.3	m	

Table A.183: FU5b frame structure (Receiving FT to PT)

Prerequisite: A.141/5				
Item	**FU5b frame structure - Name of field**	**Ref.**	**Status**	**Supp.**
1	Address field	12.6.1, 13.2.1	m	
2	#1 Receive sequence number	12.6.1, 13.4.3	m	
3	#2 Receive sequence number	12.6.1, 13.4.3	m	
4	#3 Receive sequence number	12.6.1, 13.4.3	m	
5	#4 Receive sequence number	12.6.1, 13.4.3	m	
6	#5 Receive sequence number	12.6.1, 13.4.3	m	
7	#6 Receive sequence number	12.6.1, 13.4.3	m	

Table A.184: FU5b Address field (Sending PT to FT)

Prerequisite: A.182/1						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	Spare field	13.2	m		'1'B	
2	UCN (U-plane Channel Number)	13.2	m		'000'B to '110'B	
3	ULN (U-plane Link Number)	13.2	m		'000'B to '110'B	
4	G (flaG)	13.2	m		'0'B, '1"B	

Table A.185: FU5b Address field (Receiving FT to PT)

Prerequisite: A.183/1						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	Spare field	13.2	m		'1'B	
2	UCN (U-plane Channel Number)	13.2	m		'000'B to '110'B	
3	ULN (U-plane Link Number)	13.2	m		'000'B to '110'B	
4	G (flaG)	13.2	m		'0'B, '1"B	

Table A.186: FU5b Receive sequence number (Sending PT to FT)

Prerequisite: A.182/2 TO A.182/7						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	Eri	13.4.3, 13.4.4, 14.2, 14.3	m		7 bits value	
2	A/N bit	13.4.3, 13.4.4	m		'0'B, '1'B	

Table A.187: FU5b Receive sequence number (Receiving FT to PT)

Prerequisite: A.183/2 TO A.183/7						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	Eri	13.4.3, 13.4.4, 14.2, 14.3	m		7 bits value	
2	A/N bit	13.4.3, 13.4.4	m		'0'B, '1'B	

A.5.3.2.9 FU6a frame structure

Table A.188: FU6a frame structure (Sending PT to FT)

Prerequisite: A.140/6				
Item	**FU6a frame structure - Name of field**	**Ref.**	**Status**	**Supp.**
1	Length indicator field	12.7.1, 13.3.2	m	
2	Send sequence number	12.7.1, 13.4.1	m	
3	Information field	12.7.1	m	
4	Fill field	13.5	m	

Table A.189: FU6a frame structure (Receiving FT to PT)

Prerequisite: A.141/6				
Item	**FU6a frame structure - Name of field**	**Ref.**	**Status**	**Supp.**
1	Length indicator field	12.7.1, 13.3.2	m	
2	Send sequence number	12.7.1, 13.4.1	m	
3	Information field	12.7.1	m	
4	Fill field	13.5	m	

Table A.190: FU6a Length indicator field (Sending PT to FT)

Prerequisite: A.188/1						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	M (more data bit)	13.3.2	m		'0'B, '1'B	
2	Length of information field	13.3.2	m		7 bits value	

Table A.191: FU6a Length indicator field (Receiving FT to PT)

Prerequisite: A.189/1						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	M (more data bit)	13.3.2	m		'0'B, '1'B	
2	Length of information field	13.3.2	m		7 bits value	

Table A.192: FU6a Send sequence number (Sending PT to FT)

Prerequisite: A.188/2						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	ESi	13.4.1, 13.4.2, 14.2, 14.3	m		7 bits value	
2	I/R bit	13.4.1, 13.4.2	m		'0'B, '1'B	

Table A.193: FU6a Send sequence number (Receiving FT to PT)

Prerequisite: A.189/2						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	ESi	13.4.1, 13.4.2, 14.2, 14.3	m		7 bits value	
2	I/R bit	13.4.1, 13.4.2	m		'0'B, '1'B	

A.5.3.2.10 FU6b frame structure

Table A.194: FU6b frame structure (Sending PT to FT)

Prerequisite: A.140/6				
Item	**FU6b frame structure - Name of field**	**Ref.**	**Status**	**Supp.**
1	#1 Receive sequence number	12.7.1, 13.4.3	m	
2	#2 Receive sequence number	12.7.1, 13.4.3	m	
3	#3 Receive sequence number	12.7.1, 13.4.3	m	
4	#4 Receive sequence number	12.7.1, 13.4.3	m	
5	#5 Receive sequence number	12.7.1, 13.4.3	m	
6	#6 Receive sequence number	12.7.1, 13.4.3	m	
7	#7 Receive sequence number	12.7.1, 13.4.3	m	

Table A.195: FU6b frame structure (Receiving FT to PT)

Prerequisite: A.141/6				
Item	**FU6b frame structure - Name of field**	**Ref.**	**Status**	**Supp.**
1	#1 Receive sequence number	12.7.1, 13.4.3	m	
2	#2 Receive sequence number	12.7.1, 13.4.3	m	
3	#3 Receive sequence number	12.7.1, 13.4.3	m	
4	#4 Receive sequence number	12.7.1, 13.4.3	m	
5	#5 Receive sequence number	12.7.1, 13.4.3	m	
6	#6 Receive sequence number	12.7.1, 13.4.3	m	
7	#7 Receive sequence number	12.7.1, 13.4.3	m	

Table A.196: FU6b Receive sequence number (Sending PT to FT)

Prerequisite: A.194/1 TO A.194/7						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	ERi	13.4.3, 13.4.4, 14.2, 14.3	m		7 bits value	
2	A/N bit	13.4.3, 13.4.4	m		'0'B, '1'B	

Table A.197: FU6b Receive sequence number (Receiving FT to PT)

Prerequisite: A.195/1 TO A.195/7						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	ERi	13.4.3, 13.4.4, 14.2, 14.3	m		7 bits value	
2	A/N bit	13.4.3, 13.4.4	m		'0'B, '1'B	

A.5.3.2.11 FU7 frame structure

Table A.198: FU7 frame structure (Sending PT to FT)

Prerequisite: A.140/7				
Item	**FU7 frame structure - Name of field**	**Ref.**	**Status**	**Supp.**
1	Control field (2 bytes)	11.9.4.2.1	m	
2	Information field (90 bytes)	11.9.4.2.2	m	
3	ARQ Checksum (2 bytes)	11.9.4.2.3	m	
4	RS parity symbol field (6 bytes)	11.9.4.2	m	

Table A.199: FU7 frame structure (Receiving FT to PT)

Prerequisite: A.141/7				
Item	**FU7 frame structure - Name of field**	**Ref.**	**Status**	**Supp.**
1	Control field (2 bytes)	11.9.4.2.1	m	
2	Information field (90 bytes)	11.9.4.2.2	m	
3	ARQ Checksum (2 bytes)	11.9.4.2.3	m	
4	RS parity symbol field (6 bytes)	11.9.4.2	m	

Table A.200: FU7 64 kbit/s control field (Sending PT to FT)

Prerequisite: A.198/1						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	N(O)	11.9.4.2.1.4	m		6 bits value	
2	Format-1	11.9.4.2.1.1	m		'00'B	
3	N(S)	11.9.4.2.1.7	m		3 bits value	
4	N(R)	11.9.4.2.1.9	m		3 bits value	
5	Format-2	11.9.4.2.1.1	m		'00'B, '01'B	

Table A.201: FU7 64 kbit/s control field (Receiving FT to PT)

Prerequisite: A.199/1						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	N(O)	11.9.4.2.1.4	m		6 bits value	
2	Format-1	11.9.4.2.1.1	m		'00'B	
3	N(S)	11.9.4.2.1.7	m		3 bits value	
4	N(R)	11.9.4.2.1.9	m		3 bits value	
5	Format-2	11.9.4.2.1.1	m		'00'B, '01'B	

Table A.202: FU7 72 kbit/s control field (Sending PT to FT)

Prerequisite: A.198/1						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	N(O)	11.9.4.2.1.4	m		6 bits value	
2	Format-1	11.9.4.2.1.1	m		'01'B	
3	N(S)	11.9.4.2.1.7	m		3 bits value	
4	N(R)	11.9.4.2.1.9	m		3 bits value	
5	Format-2	11.9.4.2.1.1	m		'00'B, '01'B	

Table A.203: FU7 72 kbit/s control field (Receiving FT to PT)

Prerequisite: A.199/1						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	N(O)	11.9.4.2.1.4	m		6 bits value	
2	Format-1	11.9.4.2.1.1	m		'01'B	
3	N(S)	11.9.4.2.1.7	m		3 bits value	
4	N(R)	11.9.4.2.1.9	m		3 bits value	
5	Format-2	11.9.4.2.1.1	m		'00'B, '01'B	

A.5.3.2.12 FU8 frame structure

Table A.204: FU8 frame structure (Sending PT to FT)

Prerequisite: A.140/8				
Item	**FU8 frame structure - Name of field**	**Ref.**	**Status**	**Supp.**
1	Control field (2 bytes)	11.10.3	m	
2	Information field (90 bytes)	11.10.3	m	
3	Spare (2 bytes)	11.10.3	m	
4	RS parity symbol field (6 bytes)	11.10.3	m	

Table A.205: FU8 frame structure (Receiving FT to PT)

Prerequisite: A.141/8				
Item	**FU8 frame structure - Name of field**	**Ref.**	**Status**	**Supp.**
1	Control field (2 bytes)	11.10.3	m	
2	Information field (90 bytes)	11.10.3	m	
3	Spare (2 bytes)	11.10.3	m	
4	RS parity symbol field (6 bytes)	11.10.3	m	

Table A.206: FU8 64 kbit/s control field (Sending PT to FT)

Prerequisite: A.204/1						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	N(O)	11.10.3	m		6 bits value	
2	Format-1	11.10.3	m		'00'B	
3	N(S)	11.10.3	m		3 bits value	
4	N(R)	11.10.3	m		3 bits value	
5	Format-2	11.10.3	m		'00'B, '01'B	

Table A.207: FU8 64 kbit/s control field (Receiving FT to PT)

Prerequisite: A.205/1						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	N(O)	11.10.3	m		6 bits value	
2	Format-1	11.10.3	m		'00'B	
3	N(S)	11.10.3	m		3 bits value	
4	N(R)	11.10.3	m		3 bits value	
5	Format-2	11.10.3	m		'00'B, '01'B	

Table A.208: FU8 72 kbit/s control field (Sending PT to FT)

Prerequisite: A.204/1						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	N(O)	11.10.3	m		6 bits value	
2	Format-1	11.10.3	m		'01'B	
3	N(S)	11.10.3	m		3 bits value	
4	N(R)	11.10.3	m		3 bits value	
5	Format-2	11.10.3	m		'00'B, '01'B	

Table A.209: FU8 72 kbit/s control field (Receiving FT to PT)

Prerequisite: A.205/1						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	N(O)	11.10.3	m		6 bits value	
2	Format-1	11.10.3	m		'01'B	
3	N(S)	11.10.3	m		3 bits value	
4	N(R)	11.10.3	m		3 bits value	
5	Format-2	11.10.3	m		'00'B, '01'B	

A.5.3.2.13 FU9 frame structure

Table A.210: FU9 frame structure (Sending PT to FT)

Prerequisite: A.140/9				
Item	**FU9 frame structure - Name of field**	**Ref.**	**Status**	**Supp.**
1	Alignment field	11.11.1.1.1, 11.11.2.2	m	
2	V.24 signalling field	11.11.1.1.1, 11.11.3.1	m	
3	Rate field	11.11.1.1.1, 11.11.4.1	m	
4	DIC Control field	11.11.1.1.1, 11.11.5.2	m	
5	DIC data field	11.11.1.1.1	m	
6	Information field	11.11.1.1.1	m	

Table A.211: FU9 frame structure (Receiving FT to PT)

Prerequisite: A.141/9				
Item	**FU9 frame structure - Name of field**	**Ref.**	**Status**	**Supp.**
1	Alignment field	11.11.1.1.1, 11.11.2.2	m	
2	V.24 signalling field	11.11.1.1.1, 11.11.3.1	m	
3	Rate field	11.11.1.1.1, 11.11.4.1	m	
4	DIC Control field	11.11.1.1.1, 11.11.5.2	m	
5	DIC data field	11.11.1.1.1	m	
6	Information field	11.11.1.1.1	m	

Table A.212: FU9 Alignment field (Sending PT to FT)

Prerequisite: A.210/1						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	Alignment field	11.11.2.2	m		'00'B, '11'B	

Table A.213: FU9 Alignment field (Receiving FT to PT)

Prerequisite: A.211/1						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	Alignment field	11.11.2.2	m		'00'B, '11'B	

Table A.214: FU9 V.24 signalling field (Sending PT to FT)

Prerequisite: A.210/2						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	CTS bit	11.11.3.1	m		'0'B, '1'B	
2	DCD bit	11.11.3.1	m		'0'B, '1'B	

Table A.215: FU9 V.24 signalling field (Receiving FT to PT)

Prerequisite: A.211/2						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	CTS bit	11.11.3.1	m		'0'B, '1'B	
2	DCD bit	11.11.3.1	m		'0'B, '1'B	

Table A.216: FU9 Rate field (Sending PT to FT)

Prerequisite: A.210/3						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	Spare	11.11.4.1	m		don't care	
2	Rate field	11.11.4.1	m		c21601	
c21601: IF user data resolution is nx2.4 kbit/s THEN ('0000'B to '1100'B) ELSE IF user data resolution is nx4 kbit/s THEN ('0000'B to '0111'B).						

Table A.217: FU9 Rate field (Receiving FT to PT)

Prerequisite: A.211/3						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	Spare	11.11.4.1	m		don't care	
2	Rate field	11.11.4.1	m		c21701	
c21701: IF user data resolution is nx2.4 kbit/s THEN ('0000'B to '1100'B) ELSE IF user data resolution is nx4 kbit/s THEN ('0000'B to '0111'B).						

Table A.218: FU9 DIC control field (Sending PT to FT)

Prerequisite: A.210/4						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	DIC control field	11.11.5.2	m		'000'B, '010'B, '011'B, '100'B, '111'B	

Table A.219: FU9 DIC control field (Receiving FT to PT)

Prerequisite: A.211/4						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	DIC control field	11.11.5.2	m		'000'B, '010'B, '011'B, '100'B, '111'B	

A.5.3.2.14 FU10a frame structure

Table A.220: FU10a frame structure (Sending PT to FT)

Prerequisite: A.140/10				
Item	**FU10a frame structure - Name of field**	**Ref.**	**Status**	**Supp.**
1	Send sequence number	12.11.1, 13.4.1	m	
2	Length indicator field(s)	12.11.1, 13.3.2	m	
3	Information field(s)	12.11.1	m	
4	Fill field	13.5	m	

Table A.221: FU10a frame structure (Receiving FT to PT)

Prerequisite: A.141/10				
Item	**FU10a frame structure - Name of field**	**Ref.**	**Status**	**Supp.**
1	Send sequence number	12.11.1, 13.4.1	m	
2	Length indicator field(s)	12.11.1, 13.3.2	m	
3	Information field(s)	12.11.1	m	
4	Fill field	13.5	m	

Table A.222: FU10a Send sequence number (Sending PT to FT)

Prerequisite: A.220/1						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	ESi	13.4.1, 13.4.2, 14.2, 14.3	m		7 bits value	
2	I/R bit	13.4.1, 13.4.2	m		'0'B, '1'B	

Table A.223: FU10a Send sequence number (Receiving FT to PT)

Prerequisite: A.221/1						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	ESi	13.4.1, 13.4.2, 14.2, 14.3	m		7 bits value	
2	I/R bit	13.4.1, 13.4.2	m		'0'B, '1'B	

Table A.224: FU10a Length indicator field (Sending PT to FT)

Prerequisite: A.220/2						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	M (more data bit)	13.3.2	m		'0'B, '1'B	
2	Length of information field	13.3.2	m		7 bits value	

Table A.225: FU10a Length indicator field (Receiving FT to PT)

Prerequisite: A.221/2						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	M (more data bit)	13.3.2	m		'0'B, '1'B	
2	Length of information field	13.3.2	m		7 bits value	

A.5.3.2.15 FU10b frame structure

Table A.226: FU10b frame structure (Sending PT to FT)

Prerequisite: A.140/10				
Item	**FU10b frame structure - Name of field**	**Ref.**	**Status**	**Supp.**
1	Send sequence number	12.11.1, 13.4.1	m	
2	Receive sequence number	12.11.1, 13.4.3	m	
3	Length indicator field(s)	12.11.1, 13.3.2	m	
4	Information field(s)	12.11.1	m	
5	Fill field	13.5	m	

Table A.227: FU10b frame structure (Receiving FT to PT)

Prerequisite: A.141/10				
Item	**FU10b frame structure - Name of field**	**Ref.**	**Status**	**Supp.**
1	Send sequence number	12.11.1, 13.4.1	m	
2	Receive sequence number	12.11.1, 13.4.3	m	
3	Length indicator field(s)	12.11.1, 13.3.2	m	
4	Information field(s)	12.11.1	m	
5	Fill field	13.5	m	

Table A.228: FU10b Send sequence number (Sending PT to FT)

Prerequisite: A.226/1						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	ESi	13.4.1, 13.4.2, 14.2, 14.3	m		7 bits value	
2	I/R bit	13.4.1, 13.4.2	m		'0'B, '1'B	

Table A.229: FU10b Send sequence number (Receiving FT to PT)

Prerequisite: A.227/1						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	ESi	13.4.1, 13.4.2, 14.2, 14.3	m		7 bits value	
2	I/R bit	13.4.1, 13.4.2	m		'0'B, '1'B	

Table A.230: FU10b Receive sequence number (Sending PT to FT)

Prerequisite: A.226/2						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	Eri	13.4.3, 13.4.4, 14.2, 14.3	m		7 bits value	
2	A/N bit	13.4.3, 13.4.4	m		'0'B, '1'B	

Table A.231: FU510 Receive sequence number (Receiving FT to PT)

Prerequisite: A.227/2						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	Eri	13.4.3, 13.4.4, 14.2, 14.3	m		7 bits value	
2	A/N bit	13.4.3, 13.4.4	m		'0'B, '1'B	

Table A.232: FU10b Length indicator field (Sending PT to FT)

Prerequisite: A.226/3						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	M (more data bit)	13.3.2	m		'0'B, '1'B	
2	Length of information field	13.3.2	m		7 bits value	

Table A.233: FU10b Length indicator field (Receiving FT to PT)

Prerequisite: A.227/3						
Item	**Name of sub-field**	**Ref.**	**Status**	**Supp.**	**Value Allowed**	**Value Supported**
1	M (more data bit)	13.3.2	m		'0'B, '1'B	
2	Length of information field	13.3.2	m		7 bits value	

A.5.4 Protocol error handling

A.5.4.1 General error handling

Table A.234: General error handling

Prerequisite: A.10/1 OR A.10/2 OR A.10/3				
Item	**General error handling**	**Ref.**	**Status**	**Support**
1	Unknown frames are discarded	9.2.9.1, 7.11	m	
2	Invalid frames are discarded	9.2.9.1, 6.1.5	m	

A.5.4.2 Class A error handling and recovery

Table A.235: Class A error handling and recovery

Prerequisite: A.10/2				
Item	**Class A error handling and recoveries**	**Ref.**	**Status**	**Support**
1	Waiting for acknowledgement, timer DL.04 expiry	9.2.3.6	m	

A.5.4.3 Class B error handling and recovery

Table A.236: Class B error handling and recovery

Prerequisite: A.10/3				
Item	**Class B error handling and recovery**	**Ref.**	**Status**	**Support**
1	N(S) sequence error	9.2.9.2.1	m	
2	N(R) sequence error	9.2.9.2.2	m	
3	Timer recovery condition	9.2.9.2.3	m	
4	Collision of identical transmitted and received commands	9.2.9.2.4	m	

Bibliography

The following material, though not specifically referenced in the body of the present document (or not publicly available), gives supporting information.

- ETSI EN 300 175-2: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Part 2: Physical Layer (PHL)".
- ETSI EN 300 175-3: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Part 3: Medium Access Control (MAC) layer".
- ETSI EN 300 175-5: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Part 5: Network (NWK) layer".
- ETSI EN 300 175-6: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Part 6: Identities and addressing".
- ETSI EN 300 175-7: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Part 7: Security features".
- ETSI EN 300 175-8: "Digital Enhanced Cordless Telecommunications (DECT); Common Interface (CI); Part 8: Speech coding and transmission".
- ETSI ETS 300 406 (1995): "Methods for Testing and Specification (MTS); Protocol and profile conformance testing specifications; Standardization methodology".

History

Document history			
Edition 1	August 1996	Publication as ETS 300 476-2	
V1.1.3	February 2000	Public Enquiry	PE 200024: 2000-02-16 to 2000-06-16
V1.2.0	September 2000	Vote	V 20001124: 2000-09-25 to 2000-11-24
V1.2.1	November 2000	Publication	