


Practical Rules for the Management of a Locomotive Engine

Charles Hutton Gregory

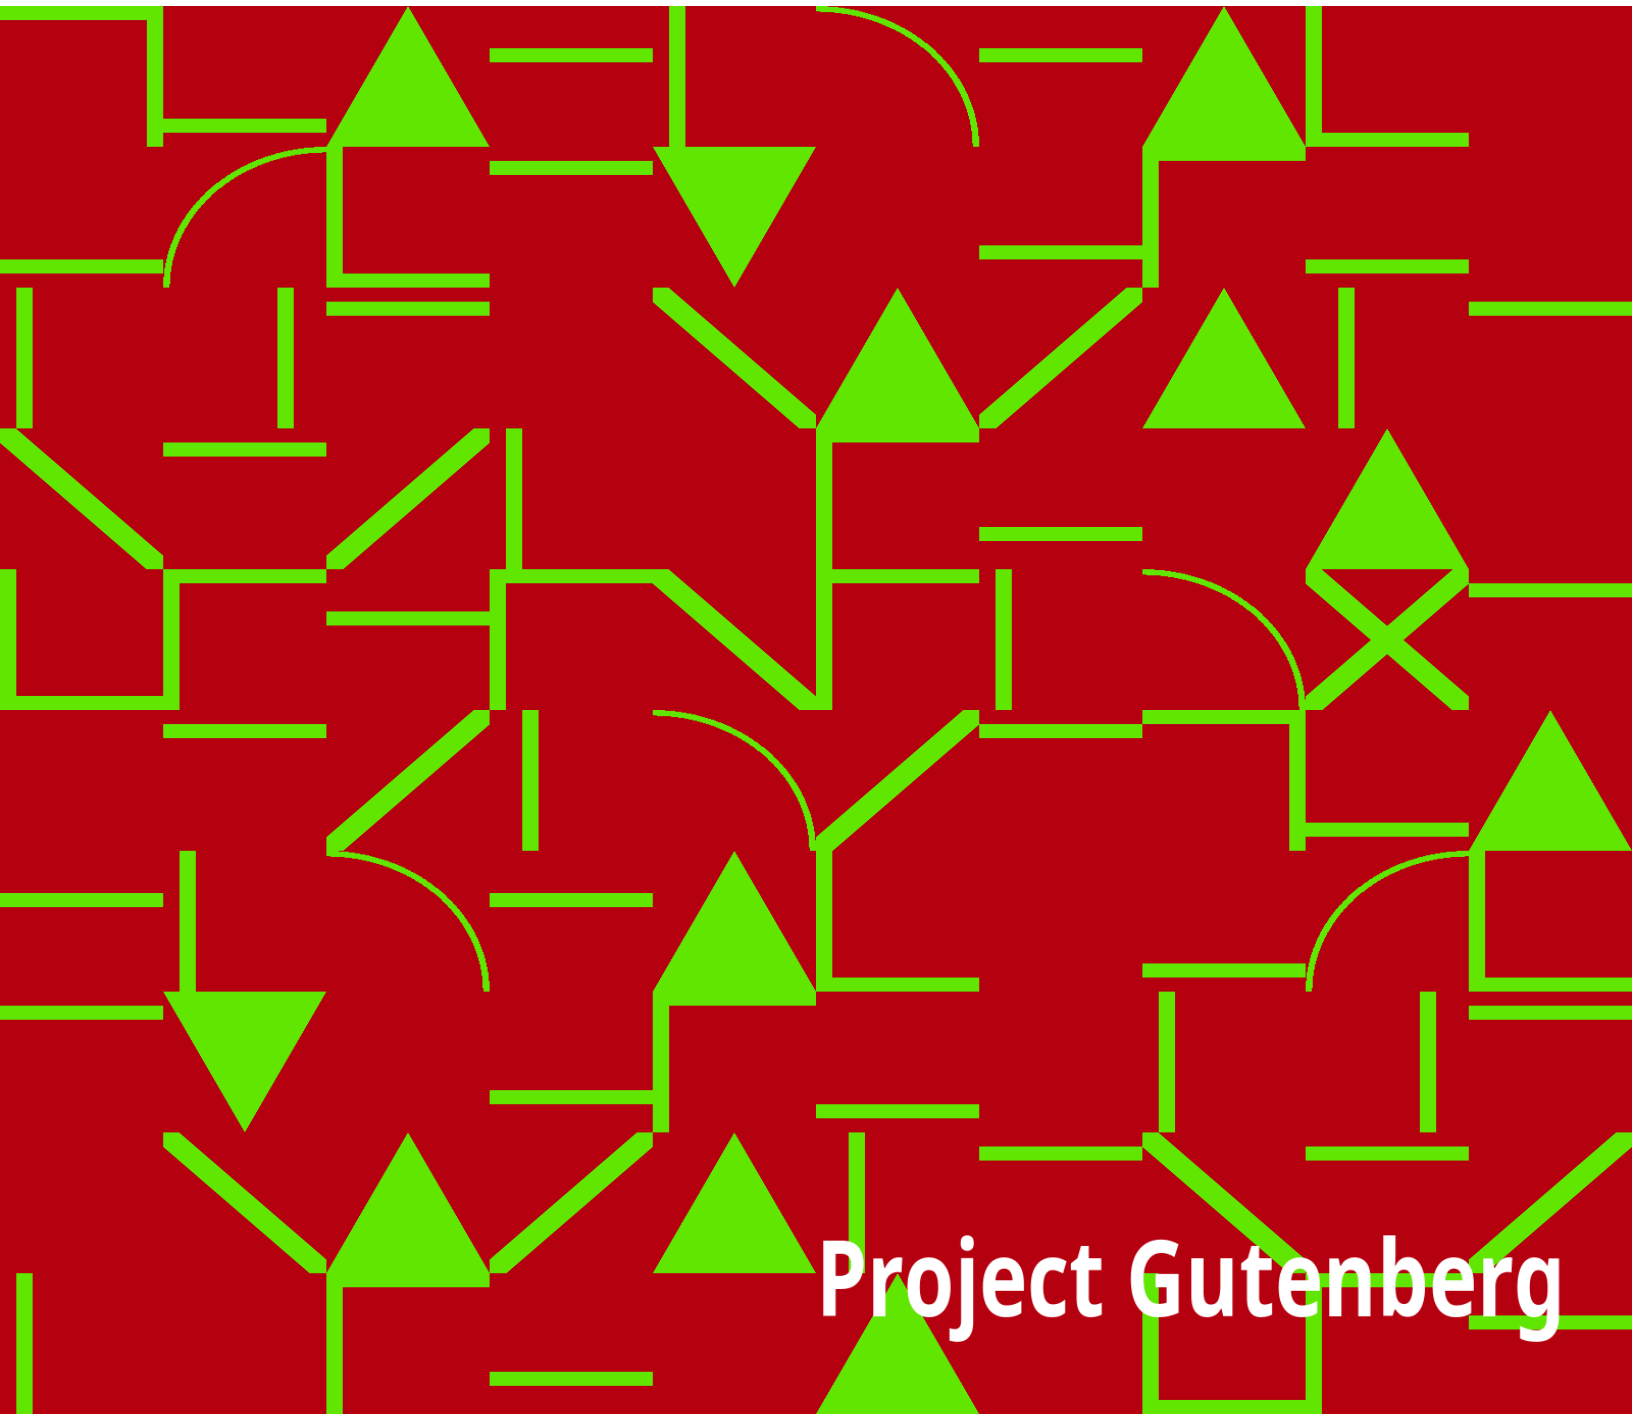

Project Gutenberg

Practical Rules for the Management of a Locomotive Engine

Charles Hutton Gregory



Project Gutenberg

The Project Gutenberg eBook of Practical Rules for the Management of a Locomotive Engine

This eBook is for the use of anyone anywhere in the United States and most other parts of the world at no cost and with almost no restrictions whatsoever. You may copy it, give it away or re-use it under the terms of the Project Gutenberg License included with this eBook or online at www.gutenberg.org. If you are not located in the United States, you will have to check the laws of the country where you are located before using this eBook.

Title: Practical Rules for the Management of a Locomotive Engine

Author: Charles Hutton Gregory

Release date: August 28, 2006 [eBook #19133]

Language: English

Other information and formats: www.gutenberg.org/ebooks/19133

Credits: Transcribed from the 1841 edition by David Price

*** START OF THE PROJECT GUTENBERG EBOOK PRACTICAL
RULES FOR THE MANAGEMENT OF A LOCOMOTIVE ENGINE ***

Transcribed from the 1841 edition by David Price, ccx074@pglaf.org

**PRACTICAL RULES FOR THE
MANAGEMENT OF A
LOCOMOTIVE ENGINE:
IN THE STATION, ON THE
ROAD, AND IN CASES OF
ACCIDENT.**

BY
CHARLES HUTTON GREGORY,
CIVIL ENGINEER.

PREFACE.

The substance of the following pages was written several months since, and subsequently sent to the Institution of Civil Engineers, where it was read in abstract on the 16th of February in the present session.

While our Engineering Literature contains several valuable Treatises on the Theory and Construction of the Locomotive Engine, it has, as yet, produced no work illustrating its Use. This circumstance, added to the recommendation of several competent authorities, has induced the writer to apply to the Council of the Institution of Civil Engineers for permission to lay before the public these Practical Rules for the Management of a Locomotive Engine, drawn up from individual experience, in the hope that they may be acceptable, at a period when any subject connected with the efficiency and safety of Railway travelling is deservedly engaging attention.

At the end of the Paper will be found some Regulations for the first appointment of Engine-men, adopted by the Directors of the London and Croydon Railway, and framed by the writer in his official capacity as their Resident Engineer. Also, a Table of Railway Velocities, indicated by the time occupied in passing over given distances, which he has frequently found to save him the trouble of calculation, and which he hopes may be similarly useful to others.

CHARLES HUTTON GREGORY.

London, March, 1841.

PRACTICAL RULES, &c.

THE MANAGEMENT OF A LOCOMOTIVE ENGINE IN THE STATION.

The careful examination of a Locomotive Engine when in the Station, and its judicious management while running, are essential to the full performance of its duty, and to ensure the safety of the passengers by the train.

While an Engine is stopping at the Station before a trip, the fire should be properly kept up,—the tubes clear at both ends,—and the fire-bars picked free from clinkers: the regulator should be closed and locked,—the tender-break screwed down tight,—the reversing-lever fixed in the middle position, so that the slides may be out of gear,—the cocks of the oil-vessels and feed-pipes turned off,—and the steam blowing off from the safety-valve at a pressure of 35 lbs. per square inch; if blowing off in any excess, the waste steam may be turned into the Tender-cistern to heat the water, and the door of the smoke-box may be opened to check the fire, but it should be fastened up again 10 or 15 minutes before the time of starting.

Before an Engine starts with a train, the attention of the Engine-man should first be directed to its being in complete working order; with this view he should go beneath the Engine, and carefully examine the working gear in detail.

The connecting-rod is a very important part, and more liable perhaps than any other to fail for want of proper examination. The cotters must be secure, and in case the brasses have too much play they must be tightened up; observing, however, that brasses should never be set so hard as to cause friction. If there are set-screws at the side of the cotters, they should be tight, and all cotters should have a split-pin at the bottom for greater

security. The cotters which fasten the piston-rods to the cross-heads should be firm in their place, as well as the set-screws, keys, or other connections, by which the feed-pump pistons are secured to the piston-rod.

The brasses of the inner framing which carry the inside bearings of the cranked axle must be examined, and any considerable play prevented by screwing them up if necessary. The wheels ought to be accurately square and firm on their axles, and the keys driven up tight. All the pins, bolts, &c., by which the slide-valve gear is connected, the lifting-links, and the slings of the slide-spindles, must be secure in their proper places; the spanners ought to be fast on the lifting and weigh-bars, and the studs on the spanners of the weigh-bars should be particularly noticed, as, if loose, they may be shaken off on the road and cause the stoppage of the Engine. A similar examination must be extended to the hand-gear, if there be any; and the bolts which fasten the plummer-blocks of the weigh-bars, &c., must be screwed up if they are loose.

The straps of the eccentrics should work with sufficient freedom, and the eccentrics must be firm in their right position on the axle, or the Engine will beat unevenly: if any escape of steam has been observed in the stuffing-boxes of the piston-rod and slide-valve spindle, or of water from the joints of the feed-pumps and suction-pipes, they must be screwed up; and any dirt that may have collected near any of the bearings or connections must be carefully wiped off with cotton waste.

The inspection beneath the Engine being complete, the Engine-man should examine the ends of the tubes of the boiler, and if there should be leakage to any serious extent, it would be prudent to drive in a plug at each end of the defective tube. A small quantity of Russian tallow should occasionally be introduced into the steam-chests and cylinders, to grease the slides and pistons. This is done, either by cocks on the outside of the smoke-box or in the cylinder covers, or through holes secured by plugs, in the steam-chest covers. The ashes should be emptied out of the smoke-box, and the small ash-door carefully secured.

Occasionally the gauge should be applied to the wheels, and the Engine should never be allowed to run when they are found to be at all incorrect or out of the square.

If there are oil-vessels at the side of the Engine with pipes to the pistons, bearings, &c., the Engine-man must see that they are filled, and the cotton wicks in the top of the pipes, and hanging over into the oil; that the grease-boxes of the axle-bearings are filled; and the pins, links, &c., of the springs right and sound. The draw-bar connecting the Engine and Tender must be secure, and the safety-chains attached.

The Tender must be replenished with coke and water. An Engine-man should never run with an Engine without knowing what stock of both the Tender will carry. It is impossible to lay down any general rule for the quantity of water evaporated and the coke consumed per mile with the same Engine, as the amount depends entirely on the extent of duty performed. The stock of coke is usually nearly twice as much as that of water,—the water which most Tenders contain is ordinarily sufficient for running 30 miles with certainty; but when the gradients are steep, the load heavy, and stoppages frequent, additional water may be oftener required; and on the other hand, with light duty, an Engine may sometimes run further without any stoppage. The inconvenience attached to the necessity of frequent stoppages, and the expense of maintaining a large number of coke and water stations, have lately induced the manufacture of a larger class of Tender on six wheels, which, from superior capacity, will admit of a much longer run.

After a little practice, the examination described above occupies a very short time: it ought to be completed, and the Engine in its position at the head of the train, at least five minutes before the hour of starting, when oil must be copiously supplied by the small oiling-can, to the oil-cups of the guides, connecting-rods, &c., and to all rubbing parts not fed by the oiling-pipes; the cocks of the large oil-vessels must be opened, and the safety-valve screwed down to the working pressure, say 45 lbs. per square inch.

It would ensure a careful inspection, if, before any train starts, the Engine-man were required to deliver to the Superintendent of the Station a certificate that he has examined his Engine, and finds it in good working order.

Several articles should be constantly carried on the Tender, as either being frequently required in the working of the Engine, or occasionally in cases of

derangement or accident. The following may be taken as a list:

One large can of oil, and one or two small oiling-cans and an oiling-tube, a box of Russian tallow, a quantity of cotton waste, hemp, and gasken, a hand-brush, keys fitted to all the principal bolts, one large and one small monkey-wrench, rods for clearing the tubes and fire, an arrow-headed poker, a shovel, and a rake.

A number of iron or wooden plugs, an iron plug-holder, and a 7 lb. maul, two cold chisels, a hammer and a file, spare washers, and duplicates of the principal bolts, nuts, pins, cotters, &c., a quantity of thick and thin cord, and some tarred line, a fire-bucket, two long crow-bars, a spare coupling-chain, with shackle and hook complete, several wooden wedges, about 2 feet long, 4 or 5 inches wide and 3 inches thick, and, if running long journeys, two spare ball-clacks, and a screw-jack.

THE MANAGEMENT OF A LOCOMOTIVE ENGINE ON THE ROAD.

In the management of a Locomotive Engine, many unforeseen circumstances may occur, requiring the use of that discretion which experience alone can confer, and which it would be almost impossible to comprise in the particular instructions contained in the following pages, which, however, the writer believes to contain all the leading principles of Engine-driving.

On receiving the signal to start, the Engine-man should only slightly open the regulator, and let the train run for several yards, before he opens it, by slow degrees, to the full extent. The object of thus giving a slight aperture to the regulator in starting, is to avoid any jerk to the carriages, by which passengers might be annoyed, or even the coupling-irons broken; to prevent the slipping of the driving-wheels, from their adhesion being unequal to the inertia of the train, when the full power of the Engine is suddenly used; and because fully opening the regulator at starting generally causes the Engine to *prime* considerably, from the quantity of water condensed in the cylinders and steam-passages while the Engine was standing. When *priming* occurs at starting, the discharge-cocks of the cylinders should be opened to remove the water. On leaving the station, and frequently on the

road, the Engine-man should watch the train behind him, to see that it is all right and its motion regular.

The Engine-man should now be standing on the foot-board of the Engine, which he ought never to leave, unless the machinery is out of order, when he may leave the Stoker in his place; he should as much as possible be in such a position as to command, without moving from his place, the reversing-lever, the whistle, and the regulator, these being the parts which he is most frequently obliged to use at the shortest notice; his hand should be upon the regulator, which, when he has arrived at a good speed, he will gradually ease off, so as to economise steam without retarding the train: his eye should be constantly directed to the rails in front of him, that he may be immediately aware of any obstruction, and at the same time his full attention must be given to the maintaining a sufficiency of steam at an equable pressure; this is to be done by using the requisite care in the manner and time of supplying *water* and *fuel*.

Water is supplied by opening the cocks in the feed-pipes, which allow the pumps to act; and the height of water in the boiler is commonly shown by a glass gauge-tube, and by three gauge-cocks at the side, which should be opened from time to time, (especially when stopping,) as they afford a more correct indication of the quantity of water and steam than the gauge-tube.

One pump, if constantly at work, would, in most Engines, supply as much, or rather more water than is required by the Engine as equivalent to the steam consumed; so that by turning on or off either or both pumps, the Engine-man has the power of regulating the height of the water in the boiler at discretion.

It may be laid down as an invariable rule, that water alone should always blow off from the bottom cock (which is from 1 inch to 1½ inch above the top of the fire-box), in order that there may be enough water over the fire-box and tubes to prevent their burning; and few Engines will carry their water much above the top cock without *priming*, so that the height of the water may be made to range between these two points, according as more or less steam is required.

The water is higher when the Engine is running than when stopping: a good working height for it in most Engines is when *water* blows off from the

middle cock while running, and *water and steam* when stopping: an Engine-man is sometimes obliged to run the water rather lower, if he has heavy work; but it is always better to keep the level of the water as high as possible.

It is observed that when any variation takes place in the pressure of the steam, a corresponding change occurs in the level of the water,—that when the pressure of the steam rises or falls, the height of the water rises or falls simultaneously. Partly for this reason, and partly to allow the more rapid generation of steam, the feed-pumps are not generally allowed to act when the Engine starts: a knowledge of this fact also shows the necessity of the water being above the ordinary level, before a decrease is allowed in the pressure of the steam.

When the Engine is highest on an inclined plane, rather a greater height of water must be kept over the fire-box than on a level, in order that the chimney ends of the tubes may be well covered.

The most favourable time for allowing the feed-pumps to act, is when the steam is blowing off with force from the safety-valve, and the fire strong; and the least favourable time is when the steam and fire are low: indeed the Engine-man should manage that it may never be necessary in the latter case, as the addition of water rapidly lowers the steam.

In order to know the force of the steam, one hand may occasionally lift or depress for a moment the lever of the safety-valve, according as the steam is under or over the working pressure; and a little practice will soon enable a person to judge the extent of excess or deficiency.

Both feed-pumps should not commence working at the same time.

The water should never be allowed to run low before arriving at any part of the road where considerable power is required, as steam is produced more rapidly when both pumps are turned off,—a measure which is imprudent unless the water is high.

When “the feed” is turned on, the Engine-man should try the pet-cock to see whether the pump is acting freely: the water thrown from it should be in forcible intermittent jets; warm water with a little steam will frequently escape from it at first; if this should continue, it may be concluded that the

upper clack does not act; and if the water is in a continuous stream without pulsations, the lower clack is out of order. In either case it will not be prudent to trust too much to the faulty pump, but the evil may frequently be remedied by working the pump a short time with the pet-cock open, or alternately turned on and off.

Coke is put on the fire by the Stoker, at the order of the Engine-man, who should hold the chain of the fire-door in his hand, and open it for as short a time as possible, while the Stoker throws on each shovelful of coke: the shovel should be well filled, and the coke distributed equally over the fire.

In most Engines, the fuel need not be higher than the bottom of the fire-door; and if allowed to fall more than 6 or 8 inches below it, it must not be expected that the pressure of the steam will be maintained, if the Engine has a load.

The supply of fuel should be regular, and so arranged that the fire may have burned up well by the time the steam is most required. As the addition of fuel causes a temporary reduction of the force of the fire, coke should not be laid on immediately before arriving at an inclined plane or any part of the road where much power is required; but when ascending an incline, coke should be gradually added when the Engine begins to *beat heavily*,—the draught is then powerful, and a regular supply of fuel required to keep up the fire.

In other circumstances, provided the fire is low enough to require fuel, the best time to put on coke is when the water is sufficiently high to turn off the feed-pumps, the steam slightly blowing off, and the Engine travelling at a good speed.

No definite instructions can be given for the frequency with which coke must be laid on the fire, as it varies according to the duty to be done, and the water consequently to be evaporated: in cases of heavy duty and bad gradients, it may at times be necessary even at as short an interval as 2 miles; under contrary circumstances an Engine may sometimes run as much as 15 miles without adding fresh coke.

The fire should be allowed to run rather low before arriving at the top of an inclined plane down which the steam will not be used: on beginning to

descend the plane, fuel should be put on the fire, which will burn up by the time the train reaches the bottom of the plane.

If it is wished to keep up the steam, it is better not to supply water and fuel at the same time.

While running, the Stoker should occasionally pick the ashes from the tubes to clear the draught.

By observing the above rules for the supply of water and coke, an efficient pressure and quantity of steam will be produced, which it must be the study of the Engine-man to economise. With this view the regulator should never be kept too far open;—as soon as the train has acquired the velocity wished, the aperture may be considerably reduced without diminishing the speed. As any diminution in the amount of steam used causes a corresponding diminution in the quantity of coke consumed, the skill of the Engine-man should be unceasingly directed to the reduction of so heavy an item of Railway expenditure.

If there should be, at any time, an unnecessary quantity and force of steam, it is readily reduced by opening the fire-door, and by turning on the feed-pumps; if there should be too little, the Engine-man must be content to run slowly for a short time, keep the regulator only partially open, and put on a gradual supply of coke.

When the water in the boiler is high, many Engines begin to prime, especially after running for several days. When this occurs, the aperture of the regulator should be diminished, and the fire-door and the discharge cocks of the cylinders opened: if the height of the water will allow it, the blow-off cock of the boiler may be opened for a short time to carry off the sediment, which will be found advantageous.

The Engine-man should frequently look to the working gear, to see that it is in proper order, and to rectify any deficiency at the next Station.

On nearing a Station where it is intended to stop, the regulator should be gradually eased off at about five-eighths of a mile from the Station, so that the train may be more under control, and when from a quarter to half a mile distant, according to the velocity and weight of the train, the steam should be completely shut off, and the train brought to rest by the breaks. In

approaching terminal Stations the steam should be shut off at a greater distance than at the intermediate Stations, to prevent the possibility of overrunning the mark from the failure of breaks. It must be borne in mind that the breaks act much less efficiently in wet or frosty weather, when it becomes necessary to shut off the steam further from the Stations. The use of the reversing-lever ought, as much as possible, to be avoided: it may sometimes be placed in the middle position (in which the valves do not act), but it should never be completely reversed unless absolutely necessary for the stoppage of the train.

At the intermediate Stations, the Stoker should frequently oil all the bearings not supplied by the large oil-vessels, and fill the oil-cups of the connecting-rods, slides, &c., and if any of the bearings, brasses, &c., are hot, they should be more copiously oiled, and eased if necessary. He should also examine all the working gear cursorily to see if it is in a complete state; particular attention should be given to the axle-bearings, and especially those of the cranked axle, which sometimes become so hot by running as to require cooling by throwing on water.

In case of the driving wheels slipping much in starting from a Station, the opening of the regulator should be reduced, and only gradually opened as the wheel bites; the Stoker is sometimes obliged to scatter ashes, sand, &c., before the wheels: some Engines are now furnished with hoppers in front, opened by a handle from the foot-board, by means of which sand may be dropped on the rails in front of the driving wheels.

If slipping is observed to an unusual extent, it may be inferred that there is not sufficient weight on the driving wheels, and the springs ought to be tightened by screwing up the nuts of the bearing bolts: or where the framing is hung to the springs by plain links, the spring pins must be lengthened the next time the Engine is in the repairing shops. A deficiency of weight on the front or hind wheels is indicated by the pitching of the Engine, and should be remedied in a similar manner.

The regulator should be gradually and completely closed, when the Engine or train pitches or rocks violently,—in passing a series of points and crossings,—in very sharp curves, especially if double,—in rough parts of the permanent way,—and in descending planes whose inclination is

sufficient to carry the train down, without steam, at a velocity of 30 miles per hour. In descending such an inclined plane, if it should be found that the velocity is greater than 30 miles per hour, it should be reduced by gently applying the break.

On every Railway there is a prescribed limit to the pressure of the steam, and no circumstance should induce the Engine-man to use steam at a higher pressure, or in any case to weight the lever, or hold it down for more than a moment. When there are two safety-valves, that which is out of reach may be set at the limit of pressure, and the valve next the foot-board some pounds lower. It is an advantage to have a stop placed below the lever of the safety-valve on the screw of the spring balance, to prevent its being inadvertently screwed down to more than the working pressure.

The steam whistle is obviously intended to give notice of danger: on this account its use is forbidden on some Railways, excepting on occasions of extreme emergency; but the variety of modulation of which it is susceptible has in others induced its adoption as a frequent warning. When the latter is the case, it has been found a safe measure to sound the whistle directly the steam has been shut off previously to stopping at a Station, and to give two short whistles the moment before starting, to warn parties of the approach and departure of the train. When this system is practised, the Engine-man should not turn on the full power of the whistle, but reserve it exclusively for cases of danger.

When near the end of the trip very little fire is wanted, and both feed-pumps should be turned on for a short distance before arriving at the Station, unless the Engine is to start again immediately. If it is intended to remain at the Station about an hour, the water should be considerably above the middle cock (when the Engine is standing), which will be effected by keeping on both feed-pumps from a half to three-quarters of a mile. The safety-valve should, at the same time, be eased off to 35 lbs.

If the train is brought into the Station by a tow-rope, great care must be taken to stretch the rope gradually by a gentle advance of the Engine, which must be stopped at a signal from the tow-rope man.

It would be prudent to conduct the examination described at the commencement, directly the Engine arrives at the Station, in order to leave

time for any repair which may be required.

When an Engine is running the last trip for the day, no fuel need be put on for the last 10, 15, or 20 miles, according as the duty is heavy or light; indeed, the fire may be nearly run out by the time the Engine stops, if the gradients, &c., are favourable. For a considerable distance before stopping both pumps should be at work, so that the water in the boiler may be at or above the top cock when the Engine stops, and the safety-valve should be eased off to 25 lbs. per square inch.

On stopping over the pit, the fire is drawn by opening the fire-door, introducing the arrow-headed poker through the fire-bars, and pulling up two or three of them from the bottom of the furnace, by which room will be allowed for the rest to be separated, and the fire fall through into the ash-pan, from which it is raked out by the Stoker. The practice of blowing off all the water from a boiler by the pressure of the steam should never be allowed, without an express order from the Superintendent of Locomotives, when the boiler is unusually full of mud; as, if frequently practised, it will seriously injure the fire-box and tubes.

THE MANAGEMENT OF A LOCOMOTIVE ENGINE IN CASES OF ACCIDENT.

An Engine is liable to several accidents while running, and it is important that the Engine-man should know how to act promptly under the circumstances. In the following list several cases are enumerated, with the particular steps to be taken in each.

1. *The bursting of a tube.*—The Engine-man should stop the Engine, and drive a plug into each end of the tube. It frequently happens that the water and steam blow out with so much force, that it is impossible even to discover the defective tube: by running the Engine for a short distance with both pumps acting, the pressure of the steam will perhaps be sufficiently reduced to enable the Engine-man to work with safety; but if the escape of water and steam is still too great to do so, he must run his Engine and train, if possible, off the main line into a siding, and draw the fire, to prevent its injuring the fire-box and tubes: when the water has run out down to the level of the defective tube, it may be easily plugged, and a fresh fire laid

and lighted. A tube will frequently leak to a considerable extent without absolutely requiring the stoppage of the train; but in this case great care is necessary not to use much steam, or urge the fire too far.

The bursting of a tube or other causes will sometimes lead to the lagging or casing of the boiler catching fire, which should be extinguished by throwing on water from the Tender-cistern in a fire-bucket, or from the water crane at a Station.

2. *The failing of one of the feed pumps.*—In this case the adequate supply of water may, with care, be maintained by one pump only. The supply of coke must be regular, and not in large quantities; and the steam must be economised, or the water may run low. The pump should be repaired as soon as possible; this may frequently be done in the interval between two trips.

3. *The breaking of a spring.*—This is an accident which does not necessarily involve the stoppage of the train; but as working the Engine in such a state causes an unequal strain, it should run very gently over rough parts of the road; and if the derangement is considerable, and cannot be repaired at the Stations, the Engine should cease running as soon as possible.

4. *The breaking of a connecting-rod, or its disconnection* by the loss of cotters, fracture of the straps, &c. This accident, or any disconnection which allows the piston to be driven from end to end of the cylinder without restraint, causes expensive damage to the cylinders and covers; and the connecting-rod, if loose, will seriously injure the smaller gear, or may even throw the Engine off the road. The Engine should therefore be instantly stopped, and if possible the connection restored; if that cannot be done, the connecting-rod must be taken off, and if on a level or a descending gradient, the train may sometimes be drawn by a single cylinder: to do so, the slide-valve spindle of the defective cylinder must be detached from the valve gear, by unscrewing the nuts, and setting the slide at the middle of its stroke so as to cover both ports.

If it should be found impracticable to move the train, the Engine might run on alone for assistance; but in any case where the Engine is obliged to

remain stationary, the fire must be drawn directly the water is down to the bottom cock.

5. *The fracture or disconnection of the eccentrics, or any of the slide-valve gear.*—In Engines without hand-gear, if the connection cannot be restored, the attempt may be made, as in the previous instance, to work with one cylinder. When the slide-valve gear is disabled, Engines with hand-gear possess an advantage which others want, in being able to be worked by hand, when a single cylinder would be unequal to the duty, from not being able to move the crank over the centres at starting.

6. *The fracture of the strap which holds the slide-valve*, renders unavailable the cylinder on that side where it occurs, without affecting the other side. The slide should be detached and placed in the middle of its stroke, and the attempt made to work with one cylinder.

7. *The disconnection of a piston*, by the fracture of either cotter, is sometimes caused by shutting off the steam too suddenly when the Engine is travelling fast with a heavy load. In this case also the slide should be detached and set in the middle position, and the piston-rod uncoupled from the connecting-rod, which should be removed to prevent its damaging the small gear.

8. *The breaking of an axle*, in a four-wheeled Engine is an accident which is almost of necessity attended with the overturn of the Engine. In a six-wheeled Engine it requires the stoppage of the train until assistance arrives.

9. *The Engine running off the rails.* With an Engine-man who drives carefully, watching well the position of the switches, and the signals given him, and stopping when he sees any danger attending his further course, this is an accident of very rare occurrence. If the Engine should run off on hard ground and near the rails, it may sometimes be lifted on again at once, by screw-jacks, crow-bars, and long sways; but if on soft ground or far from the rails, the fire must be drawn, and instant attention given to prevent its sinking deep into the ground.

The Engine should first be separated from the Tender, which, being a lighter weight, may be pushed out of the way, and leave more room for operating on the Engine; this, if it has fallen over on its side, should be lifted as

quickly as may be into a vertical position; to do so, a purchase should be obtained under the framing on the lowest side, in two places if possible; two long and tough sways should be brought to bear on these points, and several men placed to weigh upon each; and as the Engine is gradually lifted by the sways, every movement should be followed up and supported by screw-jacks bedded on timber blocking. When the Engine has been lifted upright, it should be firmly supported by timbers placed as stanchions under the framing; the earth may then be cautiously removed from under the wheels, and a length of rail introduced, taking care to bed it as securely as possible on the blockings previously laid down, without disturbing them: the same process should be repeated on the other side, and cross sleepers driven in under both rails to secure the foundation. As soon as the Engine is in a vertical position and rails inserted under the wheels, a temporary railway may be laid down in continuation, and the Engine again drawn on the main line. It will much facilitate the raising of the Engine if the water is drawn away out of the boiler as soon as it is sufficiently cool.

* * * * *

In all cases of accident involving stoppage on the main line, it is of the highest importance that some person should immediately be sent back about three-quarters of a mile along the road, to give the proper signal of obstruction, and prevent any following train from running in unexpectedly.

* * * * *

The most essential personal qualifications of an Engine-man are, sobriety and steadiness, activity, presence of mind, and unceasing watchfulness; and wherever these are combined with an accurate knowledge of the construction of a Locomotive Engine and the principles of its management, they tend in no small degree towards rendering Railways, what they properly are, the safest as well as the most agreeable mode of travelling.

REGULATIONS FOR THE FIRST APPOINTMENT OF AN ENGINE-MAN, ADOPTED BY THE DIRECTORS OF THE LONDON AND CROYDON RAILWAY.

1840.

1. The candidate must not be under twenty-one years of age, and must produce a certificate of a sound constitution and steady habits.
2. He must be able to read and write, and, if possible, understand the rudimental principles of mechanics.
3. It will be a great recommendation if he has served his time to any mechanical art, especially as a Fitter of Locomotive Engines; and, if possible, he should produce testimonials stating his qualifications as such.
4. If the candidate has been a Fitter or a stationary Engine-man, he must, for several months at least, have been a Stoker on a Locomotive Engine, under the direction of a steady and competent Engine-man; and before his appointment, he should produce a testimonial from the Superintendent of Locomotives, or at least from the Engine-man under whom he has served, stating full confidence in his acquaintance with the construction of an Engine and the principles of its management.
5. If the candidate has not been a Fitter or a stationary Engine-man, he must have served as a Stoker for at least two years, and produce the testimonials named in the preceding rules.
6. If required by the Board of Directors, for greater security, the candidate must undergo an examination from their Engineer, Superintendent of Locomotives, or other competent person, as to his knowledge of an Engine and its management, and the general result of this examination must be committed to paper, signed by the examiner, and presented to the Board.
7. The Engineer or Superintendent of Locomotives of the Railway to which the candidate is desirous of being appointed, shall sign a certificate stating that he has conversed with him, has seen him drive, and has confidence in his steadiness and ability.
8. Before being allowed to take the entire charge of an Engine and train, the candidate must drive for several days under the direction of an experienced Engine-man, who must be on his Engine, and certify to his ability.
9. All certificates and testimonials must be deposited with the Secretary of the Company, who will restore them to the owner on his leaving their

service.

A TABLE OF VELOCITIES.

Time occupied in Travelling one eighth of a mile	Time occupied in Travelling $\frac{1}{4}$ of a mile	Velocity
7.5	15	60.0
8	16	56.2
8.5	17	52.9
9	18	50.0
9.5	19	47.4
10	20	45.0
10.5	21	42.9
11	22	40.9
11.5	23	39.1
12	24	37.5
12.5	25	36.0

13	26	34.6
13.5	27	33.3
14	28	32.1
14.5	29	31.0
15	30	30.0
15.5	31	29.0
16	32	28.1
16.5	33	27.3
17	34	26.5
17.5	35	25.7
18	36	25.0
18.5	37	24.3
19	38	23.7
19.5	39	23.1
20	40	22.5

20.5	41	21.9
21	42	21.4
21.5	43	20.9
22	44	20.4
22.5	45	20.0
23	46	19.6
23.5	47	19.1
24	48	18.7
24.5	49	18.4
25	50	18.0
25.5	51	17.7
26	52	17.3
26.5	53	17.0
27	54	16.7
28	56	16.0

29	58	15.5
30	60	15.0
31	62	14.5
32	64	14.1
33	66	13.6
34	68	13.2
35	70	12.8
36	72	12.5
37	74	12.2
38	76	11.8
39	78	11.5
40	80	11.25
41	82	11.0
42	84	10.7
43	86	10.5

44

88

10.2

45

90

10.0

*** END OF THE PROJECT GUTENBERG EBOOK PRACTICAL
RULES FOR THE MANAGEMENT OF A LOCOMOTIVE ENGINE ***

Updated editions will replace the previous one—the old editions will be renamed.

Creating the works from print editions not protected by U.S. copyright law means that no one owns a United States copyright in these works, so the Foundation (and you!) can copy and distribute it in the United States without permission and without paying copyright royalties. Special rules, set forth in the General Terms of Use part of this license, apply to copying and distributing Project Gutenberg™ electronic works to protect the PROJECT GUTENBERG™ concept and trademark. Project Gutenberg is a registered trademark, and may not be used if you charge for an eBook, except by following the terms of the trademark license, including paying royalties for use of the Project Gutenberg trademark. If you do not charge anything for copies of this eBook, complying with the trademark license is very easy. You may use this eBook for nearly any purpose such as creation of derivative works, reports, performances and research. Project Gutenberg eBooks may be modified and printed and given away—you may do practically ANYTHING in the United States with eBooks not protected by U.S. copyright law. Redistribution is subject to the trademark license, especially commercial redistribution.

START: FULL LICENSE

THE FULL PROJECT GUTENBERG™ LICENSE

PLEASE READ THIS BEFORE YOU DISTRIBUTE OR USE THIS WORK

To protect the Project Gutenberg™ mission of promoting the free distribution of electronic works, by using or distributing this work (or any other work associated in any way with the phrase “Project Gutenberg”), you agree to comply with all the terms of the Full Project Gutenberg License available with this file or online at www.gutenberg.org/license.

Section 1. General Terms of Use and Redistributing Project Gutenberg electronic works

1.A. By reading or using any part of this Project Gutenberg electronic work, you indicate that you have read, understand, agree to and accept all the terms of this license and intellectual property (trademark/copyright) agreement. If you do not agree to abide by all the terms of this agreement, you must cease using and return or destroy all copies of Project Gutenberg electronic works in your possession. If you paid a fee for obtaining a copy of or access to a Project Gutenberg electronic work and you do not agree to be bound by the terms of this agreement, you may obtain a refund from the person or entity to whom you paid the fee as set forth in paragraph 1.E.8.

1.B. “Project Gutenberg” is a registered trademark. It may only be used on or associated in any way with an electronic work by people who agree to be bound by the terms of this agreement. There are a few things that you can do with most Project Gutenberg electronic works even without complying with the full terms of this agreement. See paragraph 1.C below. There are a lot of things you can do with Project Gutenberg electronic works if you follow the terms of this agreement and help preserve free future access to Project Gutenberg electronic works. See paragraph 1.E below.

1.C. The Project Gutenberg Literary Archive Foundation (“the Foundation” or PGLAF), owns a compilation copyright in the collection of Project Gutenberg electronic works. Nearly all the individual works in the collection are in the public domain in the United States. If an individual work is unprotected by copyright law in the United States and you are

located in the United States, we do not claim a right to prevent you from copying, distributing, performing, displaying or creating derivative works based on the work as long as all references to Project Gutenberg are removed. Of course, we hope that you will support the Project Gutenberg mission of promoting free access to electronic works by freely sharing Project Gutenberg works in compliance with the terms of this agreement for keeping the Project Gutenberg name associated with the work. You can easily comply with the terms of this agreement by keeping this work in the same format with its attached full Project Gutenberg License when you share it without charge with others.

1.D. The copyright laws of the place where you are located also govern what you can do with this work. Copyright laws in most countries are in a constant state of change. If you are outside the United States, check the laws of your country in addition to the terms of this agreement before downloading, copying, displaying, performing, distributing or creating derivative works based on this work or any other Project Gutenberg work. The Foundation makes no representations concerning the copyright status of any work in any country other than the United States.

1.E. Unless you have removed all references to Project Gutenberg:

1.E.1. The following sentence, with active links to, or other immediate access to, the full Project Gutenberg License must appear prominently whenever any copy of a Project Gutenberg work (any work on which the phrase “Project Gutenberg” appears, or with which the phrase “Project Gutenberg” is associated) is accessed, displayed, performed, viewed, copied or distributed:

This eBook is for the use of anyone anywhere in the United States and most other parts of the world at no cost and with almost no restrictions whatsoever. You may copy it, give it away or re-use it under the terms of the Project Gutenberg™ License included with this eBook or online at www.gutenberg.org. If you are not located in the United States, you will have to check the laws of the country where you are located before using this eBook.

1.E.2. If an individual Project Gutenberg electronic work is derived from texts not protected by U.S. copyright law (does not contain a notice indicating that it is posted with permission of the copyright holder), the work can be copied and distributed to anyone in the United States without paying any fees or charges. If you are redistributing or providing access to a work with the phrase “Project Gutenberg” associated with or appearing on the work, you must comply either with the requirements of paragraphs 1.E.1 through 1.E.7 or obtain permission for the use of the work and the Project Gutenberg trademark as set forth in paragraphs 1.E.8 or 1.E.9.

1.E.3. If an individual Project Gutenberg electronic work is posted with the permission of the copyright holder, your use and distribution must comply with both paragraphs 1.E.1 through 1.E.7 and any additional terms imposed by the copyright holder. Additional terms will be linked to the Project Gutenberg License for all works posted with the permission of the copyright holder found at the beginning of this work.

1.E.4. Do not unlink or detach or remove the full Project Gutenberg License terms from this work, or any files containing a part of this work or any other work associated with Project Gutenberg.

1.E.5. Do not copy, display, perform, distribute or redistribute this electronic work, or any part of this electronic work, without prominently displaying the sentence set forth in paragraph 1.E.1 with active links or immediate access to the full terms of the Project Gutenberg License.

1.E.6. You may convert to and distribute this work in any binary, compressed, marked up, nonproprietary or proprietary form, including any word processing or hypertext form. However, if you provide access to or distribute copies of a Project Gutenberg work in a format other than “Plain Vanilla ASCII” or other format used in the official version posted on the official Project Gutenberg website (www.gutenberg.org), you must, at no additional cost, fee or expense to the user, provide a copy, a means of exporting a copy, or a means of obtaining a copy upon request, of the work in its original “Plain Vanilla ASCII” or other form. Any alternate format must include the full Project Gutenberg License as specified in paragraph 1.E.1.

1.E.7. Do not charge a fee for access to, viewing, displaying, performing, copying or distributing any Project Gutenberg works unless you comply with paragraph 1.E.8 or 1.E.9.

1.E.8. You may charge a reasonable fee for copies of or providing access to or distributing Project Gutenberg electronic works provided that:

- You pay a royalty fee of 20% of the gross profits you derive from the use of Project Gutenberg works calculated using the method you already use to calculate your applicable taxes. The fee is owed to the owner of the Project Gutenberg trademark, but he has agreed to donate royalties under this paragraph to the Project Gutenberg Literary Archive Foundation. Royalty payments must be paid within 60 days following each date on which you prepare (or are legally required to prepare) your periodic tax returns. Royalty payments should be clearly marked as such and sent to the Project Gutenberg Literary Archive Foundation at the address specified in Section 4, "Information about donations to the Project Gutenberg Literary Archive Foundation."
- You provide a full refund of any money paid by a user who notifies you in writing (or by e-mail) within 30 days of receipt that s/he does not agree to the terms of the full Project Gutenberg™ License. You must require such a user to return or destroy all copies of the works possessed in a physical medium and discontinue all use of and all access to other copies of Project Gutenberg™ works.
- You provide, in accordance with paragraph 1.F.3, a full refund of any money paid for a work or a replacement copy, if a defect in the electronic work is discovered and reported to you within 90 days of receipt of the work.
- You comply with all other terms of this agreement for free distribution of Project Gutenberg™ works.

1.E.9. If you wish to charge a fee or distribute a Project Gutenberg™ electronic work or group of works on different terms than are set forth in this agreement, you must obtain permission in writing from the Project Gutenberg Literary Archive Foundation, the manager of the Project

Gutenberg™ trademark. Contact the Foundation as set forth in Section 3 below.

1.F.

1.F.1. Project Gutenberg volunteers and employees expend considerable effort to identify, do copyright research on, transcribe and proofread works not protected by U.S. copyright law in creating the Project Gutenberg™ collection. Despite these efforts, Project Gutenberg™ electronic works, and the medium on which they may be stored, may contain “Defects,” such as, but not limited to, incomplete, inaccurate or corrupt data, transcription errors, a copyright or other intellectual property infringement, a defective or damaged disk or other medium, a computer virus, or computer codes that damage or cannot be read by your equipment.

1.F.2. LIMITED WARRANTY, DISCLAIMER OF DAMAGES - Except for the “Right of Replacement or Refund” described in paragraph 1.F.3, the Project Gutenberg Literary Archive Foundation, the owner of the Project Gutenberg™ trademark, and any other party distributing a Project Gutenberg™ electronic work under this agreement, disclaim all liability to you for damages, costs and expenses, including legal fees. YOU AGREE THAT YOU HAVE NO REMEDIES FOR NEGLIGENCE, STRICT LIABILITY, BREACH OF WARRANTY OR BREACH OF CONTRACT EXCEPT THOSE PROVIDED IN PARAGRAPH 1.F.3. YOU AGREE THAT THE FOUNDATION, THE TRADEMARK OWNER, AND ANY DISTRIBUTOR UNDER THIS AGREEMENT WILL NOT BE LIABLE TO YOU FOR ACTUAL, DIRECT, INDIRECT, CONSEQUENTIAL, PUNITIVE OR INCIDENTAL DAMAGES EVEN IF YOU GIVE NOTICE OF THE POSSIBILITY OF SUCH DAMAGE.

1.F.3. LIMITED RIGHT OF REPLACEMENT OR REFUND - If you discover a defect in this electronic work within 90 days of receiving it, you can receive a refund of the money (if any) you paid for it by sending a written explanation to the person you received the work from. If you received the work on a physical medium, you must return the medium with your written explanation. The person or entity that provided you with the defective work may elect to provide a replacement copy in lieu of a refund. If you received the work electronically, the person or entity providing it to

you may choose to give you a second opportunity to receive the work electronically in lieu of a refund. If the second copy is also defective, you may demand a refund in writing without further opportunities to fix the problem.

1.F.4. Except for the limited right of replacement or refund set forth in paragraph 1.F.3, this work is provided to you 'AS-IS', WITH NO OTHER WARRANTIES OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO WARRANTIES OF MERCHANTABILITY OR FITNESS FOR ANY PURPOSE.

1.F.5. Some states do not allow disclaimers of certain implied warranties or the exclusion or limitation of certain types of damages. If any disclaimer or limitation set forth in this agreement violates the law of the state applicable to this agreement, the agreement shall be interpreted to make the maximum disclaimer or limitation permitted by the applicable state law. The invalidity or unenforceability of any provision of this agreement shall not void the remaining provisions.

1.F.6. INDEMNITY - You agree to indemnify and hold the Foundation, the trademark owner, any agent or employee of the Foundation, anyone providing copies of Project Gutenberg™ electronic works in accordance with this agreement, and any volunteers associated with the production, promotion and distribution of Project Gutenberg™ electronic works, harmless from all liability, costs and expenses, including legal fees, that arise directly or indirectly from any of the following which you do or cause to occur: (a) distribution of this or any Project Gutenberg work, (b) alteration, modification, or additions or deletions to any Project Gutenberg work, and (c) any Defect you cause.

Section 2. Information about the Mission of Project Gutenberg

Project Gutenberg is synonymous with the free distribution of electronic works in formats readable by the widest variety of computers including obsolete, old, middle-aged and new computers. It exists because of the

efforts of hundreds of volunteers and donations from people in all walks of life.

Volunteers and financial support to provide volunteers with the assistance they need are critical to reaching Project Gutenberg's goals and ensuring that the Project Gutenberg collection will remain freely available for generations to come. In 2001, the Project Gutenberg Literary Archive Foundation was created to provide a secure and permanent future for Project Gutenberg and future generations. To learn more about the Project Gutenberg Literary Archive Foundation and how your efforts and donations can help, see Sections 3 and 4 and the Foundation information page at www.gutenberg.org.

Section 3. Information about the Project Gutenberg Literary Archive Foundation

The Project Gutenberg Literary Archive Foundation is a non-profit 501(c)(3) educational corporation organized under the laws of the state of Mississippi and granted tax exempt status by the Internal Revenue Service. The Foundation's EIN or federal tax identification number is 64-6221541. Contributions to the Project Gutenberg Literary Archive Foundation are tax deductible to the full extent permitted by U.S. federal laws and your state's laws.

The Foundation's business office is located at 41 Watchung Plaza #516, Montclair NJ 07042, USA, +1 (862) 621-9288. Email contact links and up to date contact information can be found at the Foundation's website and official page at www.gutenberg.org/contact

Section 4. Information about Donations to the Project Gutenberg Literary Archive Foundation

Project Gutenberg™ depends upon and cannot survive without widespread public support and donations to carry out its mission of increasing the number of public domain and licensed works that can be freely distributed in machine-readable form accessible by the widest array of equipment

including outdated equipment. Many small donations (\$1 to \$5,000) are particularly important to maintaining tax exempt status with the IRS.

The Foundation is committed to complying with the laws regulating charities and charitable donations in all 50 states of the United States. Compliance requirements are not uniform and it takes a considerable effort, much paperwork and many fees to meet and keep up with these requirements. We do not solicit donations in locations where we have not received written confirmation of compliance. To SEND DONATIONS or determine the status of compliance for any particular state visit www.gutenberg.org/donate.

While we cannot and do not solicit contributions from states where we have not met the solicitation requirements, we know of no prohibition against accepting unsolicited donations from donors in such states who approach us with offers to donate.

International donations are gratefully accepted, but we cannot make any statements concerning tax treatment of donations received from outside the United States. U.S. laws alone swamp our small staff.

Please check the Project Gutenberg web pages for current donation methods and addresses. Donations are accepted in a number of other ways including checks, online payments and credit card donations. To donate, please visit: www.gutenberg.org/donate.

Section 5. General Information About Project Gutenberg electronic works

Professor Michael S. Hart was the originator of the Project Gutenberg concept of a library of electronic works that could be freely shared with anyone. For forty years, he produced and distributed Project Gutenberg eBooks with only a loose network of volunteer support.

Project Gutenberg eBooks are often created from several printed editions, all of which are confirmed as not protected by copyright in the U.S. unless a

copyright notice is included. Thus, we do not necessarily keep eBooks in compliance with any particular paper edition.

Most people start at our website which has the main PG search facility:
www.gutenberg.org.

This website includes information about Project Gutenberg, including how to make donations to the Project Gutenberg Literary Archive Foundation, how to help produce our new eBooks, and how to subscribe to our email newsletter to hear about new eBooks.