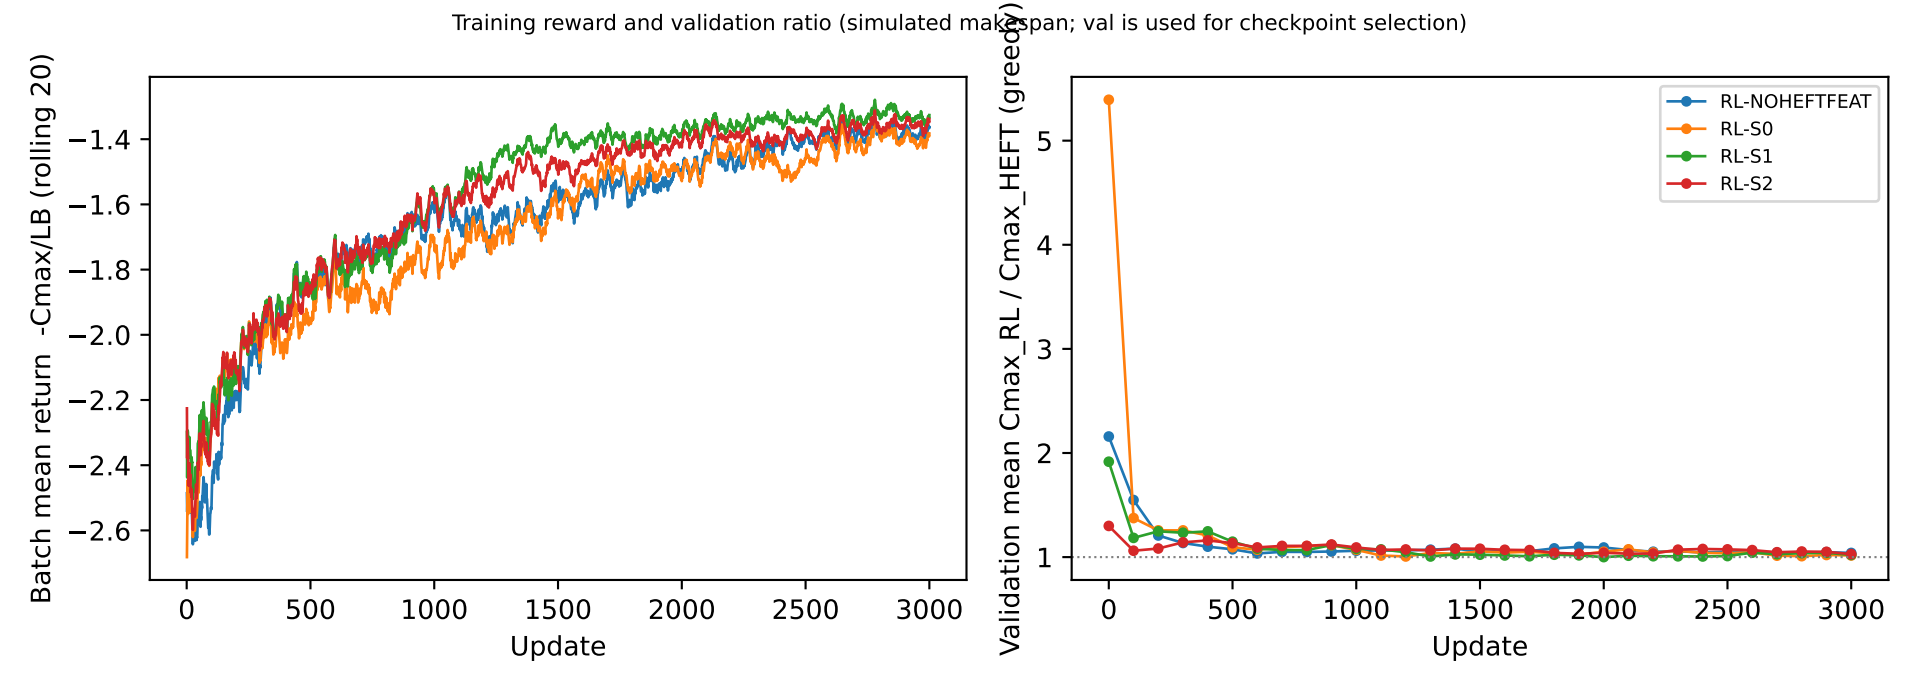

Training reward and validation ratio (simulated makespan; val is used for checkpoint selection)
Batch mean return -Cmax/LB (rolling 20)
−1.4
−1.6
−1.8
−2.0
−2.2
−2.4
−2.6
0
500
1000
1500
2000
2500
3000
Update
Validation mean Cmax_RL / Cmax_HEFT (greedy)
5
4
3
2
1
RL-NOHEFTFEAT
RL-S0
RL-S1
RL-S2
0
500
1000
1500
2000
2500
3000
Update