Institutional info

Scopus

Save search

Set search alert

Advanced query

Search within
Article title, Abstract, Keywords

Search documents *
therm* outdoor sound*

Add search field

Reset Search

Documents | Preprints (Beta) | Secondary documents

209 documents found

Analyze results


Refine search

Search within results

Filters

Year

Range Individual

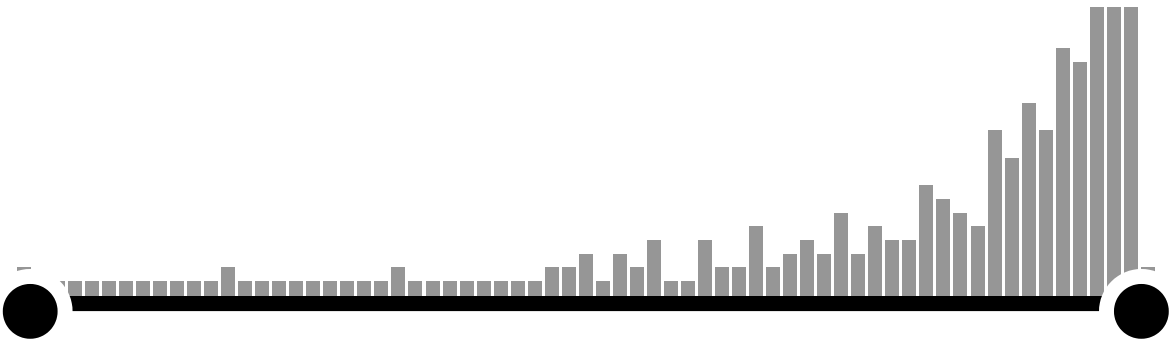

from – to

Subject area

- Engineering 108
- Physics and Astronomy 51
- Environmental Science 43
- Energy 24
- Social Sciences 24

Show all

Document type

- [ ] Article 136
- [ ] Conference paper 58
- [ ] Review 8
- [ ] Book chapter 4
- [ ] Conference review 3

Language

- [ ] English 199
- [ ] Chinese 5
- [ ] German 3
- [ ] French 1
- [ ] Japanese 1

Keyword

- [ ] Acoustic Noise 38
- [ ] Thermal Comfort 35
- [ ] Acoustic Wave Propagation 23
- [ ] Ventilation 23
- [ ] Air Quality 21

Show all

Country/territory

Source type

Source title

Author name

Publication stage

Affiliation

Funding sponsor

Open access

Export filter counts

Beta

All Export Download PDF Citation overview ••• More Hide all abstracts Sort by Date (ne

	Document title	Authors	Source	Year	Citations
Article					
201	**Long-term testing of a low-loss 800 kVPPLP-insulated SCFF cable**	Couderc D.	IEEE Power Engineering Review, 16(1)	1996	0

Hide abstract Find It @ UCL View at Publisher

In 1986, the government of Québec asked Hydro-Québec to study the feasibility of under-river passages for the St. Lawrence river crossings of future EHV lines. To meet this requirement, the utility launched a program to identify and validate the most promising technologies for the 800-kV ac cable class. The development of an 800-kV PPLP-insulated fluid-filled cable and its accessories started in 1990 in collaboration with Sumitomo Electric Industries, Ltd.. Under this development program, the cable and its accessories were subjected to a series of tests at IREQ's high voltage laboratory and cable test facility. A type test of approximately two months was completed successfully at the end of 1991, following which a long-term test was initiated and completed one year later. This pa per describes the main developments of the long-term test program and reports the results obtained. A 9-segment Milliken type conductor having a cross section of 2000 mm was selected for the required rated current. The PPLP insulation (30 mm thick) is graded with a 1-mm layer of thin high-density kraft paper on the conductor screen to mitigate the maximum electrical stress. The test line for the long-term test is approximately 130 m long and includes two *outdoor* sealing ends, two SF6 switchgear sealing ends, and one straight joint with an insulated flange. The hairpin configuration of the cable run was chosen for its compactness, and especially for its suitability to simulate, in the straight section, the operating conditions of a two-cable phase m a typical under-river tunnel crossing. The temperatures measured by 20 *thermocouples* installed at precise locations in the conductor oil channel were relayed by an infrared transmitter to the control room. The test temperatures and voltages chosen to simulate approximately 30 years of service with a 40-week long test were based on a well known approach. The necessity to take into account the accessory lifetime and the complex effects of *thermal* cycling on the insulation of both the cable and the accessories suggested a conservative approach in favor of a value of 12 for the voltage exponent. The conductor temperature of the cable and the joint is kept at 90°C and 100°C as the test voltage is raised in three steps from 1.0 Um to 1.3 Urn. Each cycle of the cycling periods lasts 7 days. The temperature is raised to the maximum conductor temperature (90°C or 100°C) in approximately 8 h and kept at this value for 5.5 days. Follows approximately one day of forced cooling to bring the conductor temperature down by 40°C to 50°C. The loss tangent of the test line was measured monthly and the values obtained were within design specifications (percent). The gas content in the oil sampled at the five accessories indicates that the insulation aging was essentially *thermal* in origin andthat no abnormal behavior such as partial discharge activity was present. The test line was submitted to lightning impulse and switching surge tests following the long-term test. The conductor temperature of the cable and the joint was kept at 100°C during these tests. The cable and the accessories wisthstood successfully impulse voltages of ±2160 kV (BIL+20 percent) and switching surge voltages of-2170 kV. Since no failure occurred in the test line, dissections of the accessories and 19 sections of the cable were done with great care in order to inspect the insulation for any signs of defect or incipient problems. The results obtained revealed the insulation in both the cable and the accessories was *sound*. No signs of core movement at the joint could be observed, and the registration of tapes in bends and various mechanically stressed areas were within factory tolerances. In conclusion, the test program, including the type tests, showed very good performance of the PPLP-insulated cable and accessories designed to satisfy service conditions and insulation levels required for future 765-kV St. Lawrence under-river crossings. The results yielded by the long-term test confirm the conclusion reached after the type tests, namely that no further requirements or design modifications would be necessary.

Article					
202	**Application of sound-absorbent plastic to acoustic paneling**	Ootsuta Katsuhisa, Tani Shuichi	Mitsubishi Electric Advance, 74	1996	5

Hide abstract Find It @ UCL View at Publisher

A durable high-performance acoustic panel was developed using a special *sound*-absorbent plastic acoustic-insulation material formed by subjecting *thermoplastic* resin beads to heat and pressure. The plastic is incorporated into a module that enhances its *sound*-deadening properties. Rugged, weather-resistant design and excellent longevity make the paneling suited to both indoor and *outdoor* use.

Article

	Document title	Authors	Source	Year	Citations
203	**Effect of thermal turbulence on sound propagation in the atmosphere in the presence of a shadow zone | Influence d'une turbulence thermique sur la propagation du son dans l'atmosphere en presence d'une zone d'ombre**	Chevret P., Blanc-Benon Ph.	Journal De Physique, 4(5 pt 2)	1994	0

Hide abstract Find It @ UCL View at Publisher

A numerical technique for simulating the acoustic wave propagation through a turbulent atmosphere is introduced. We first generate a random homogeneous and isotropic medium by creating N independent realizations in terms of discrete Fourier modes. Then, for each realization, we solve a parabolic equation using a Split step Pade algorithm. Finally, we calculate the mean intensity of the acoustic field and its phase and amplitude fluctuations. Our numerical results are compared with *outdoor* measurements.

Discover early research ideas

View preprints published by authors to have an early idea of upcoming research documents.

View 16 preprints

	Article				
204	**Research and education in physical acoustics at the University of Mississippi, USA**	Bass H.E.	Applied Acoustics, 41(3)	1994	3

Hide abstract Find It @ UCL View at Publisher Related documents

The University of Mississippi provides graduate education for a significant fraction of US students pursuing careers in physical acoustics. The education program emphasizes traditional physics coursework with research opportunities in acoustics. Research is conducted in a new, dedicated state-of-the-art research facility with access to modern data acquisition and analysis systems. Research projects include agroacoustics, *outdoor sound* propagation, *thermoacoustics*, acoustically active surfaces, active noise control, nondestructive testing and machine perception and non-linear acoustics. © 1994.

	Conference Paper				
205	**Thermal and acoustical performance of `buffer rooms'**	Mahdavi A.	ASHRAE Transactions , 99(pt 1)	1993	4

Hide abstract Find It @ UCL View at Publisher

The term `buffer room' refers in this context to spaces built between *thermally*, visually, and acoustically `controlled' indoor rooms and the `noncontrollable' *outdoor* environment. Examples of buffer rooms are sunrooms, atria, (enclosed) staircases, and air locks. In a long-term research effort carried out in Austria, buffer rooms were studied with regard to their hygrothermal and acoustical performance within a human-ecological framework. Special attention was paid to the problems of temperature fluctuations and risk of overheating, ventilation rates, and humidity control as well as *sound* transmission. The research agenda included studies under controlled conditions in SHA, a facility dedicated to building physics research in Vienna, Austria, as well as field investigations. This paper gives a summarized overview of the content and results of some of these studies, focusing on the issues of *thermal* performance as well as the acoustical insulation effect of sunrooms and its relationship to natural ventilation.

	Conference Paper				
206	**Variation of 222Rn concentration in outdoor air due to variation of the atmospheric boundary layer**	Kataoka T.,Tsukamoto O., Yunoki E.,... Sahashi K., Fujii S.	Radiation Protection Dosimetry , 45(1-4 SUPPL.)	1992	11

Hide abstract Find It @ UCL View at Publisher

Variation of ^{222}Rn concentration in *outdoor* air, returns of a monostatic acoustic *sounder* and sensible heat flux are simultaneously observed at Okayama-shi in Japan. The sensible heat flux is measured with an eddy correlation method using a sonic anemometer and a copper-constantan *thermocouple thermometer*. Using height of a surface-

	Document title	Authors	Source	Year	Citations

based inversion layer obtained by the acoustic *sounder* returns and two ^{222}Rn concentrations during the presence of the surface-based inversion layer, the exhalation rate of ^{222}Rn at this site is estimated to be about 0.01 $Bq.m^{-2}.s^{-1}$, which agrees well with the exhalation rate of ^{222}Rn estimated at Nagoya-shi in Japan. Using the estimated exhalation rates of ^{222}Rn and the variation of the ^{222}Rn concentration in the daytime, heights of mixing layers are estimated. These heights of the mixing layers are larger than the height of the mixing layer estimated using the sensible heat flux and the representative vertical profile of the autumnal night time air temperature in this area.

Conference Paper

207 **PUBLISHED RESULTS OF THE ARI CERTIFIED SOUND RATING PROGRAM.** Potter Allen Proceedings National Conference on Noise Control Engineering 1983 0

Hide abstract Find It @ UCL View at Publisher

The Air-Conditioning and Refrigeration Institute (ARI) has completed over a dozen years of publishing certified *sound* ratings for *outdoor* unitary equipment. This program covers the air-cooled *outdoor* portions of factory-made mechanical air-conditioning equipment or heat pumps rated in cooling capacity at less than 135,000 British *thermal* units per hour (Btuh). Beginning in 1983, ARI *sound* ratings for this equipment are in terms of a different descriptor than that previously used consistently from 1971 through 1982. The empirical relation between the two ratings, and also the inevitable correlation between *sound* output and *thermal* capacity is examined. It is shown that the *sound* of the *outdoor* portion of air-conditioning equipment varies substantially due to factors other than *thermal* rating. (For the same *thermal* capacity, *sound* ratings are distributed with a standard deviation on the order of 3 decibels.) Within such variation due to other factors, exists a strong positive correlation between *sound* output and *thermal* capacity. A relationship of the form L equals A plus B log(Q) is applicable.

Article

208 **PROJECT T-I-D-E, TEMPERATURE INVERSION DETECTION EQUIPMENT.** de Graffenried Albert L. IEEE Intercon Tech Pap 973 1973 0

Hide abstract Find It @ UCL View at Publisher

To detect the birth, growth rate, and break-up of ground-based atmospheric temperature-inversion layers (so important in ground-level airpollution) a 4-foot parabolic reflector with a 4 multiplied by 4 rectangular array of microphones at its image plane was used as the receiver on a 0. 6-mile *outdoor* sonic range. *Sound*-source image motion, as well as amplitude and phase modulation of 3. 4 khz signals were detected and interpreted. The mathematics and physics of the growth of the ground-based atmospheric temperature inversion layer are examined, and system errors are presented. Some reasons for initiating this project are listed.

Article

209 **Generation of Intense Audio Sound Fields Utilizing Arrays of Multiple-Driver Horns** Levy S.E.,Carlisle R.W. Journal of the Acoustical Society of America , 33(7) 1961 0

Hide abstract Find It @ UCL View at Publisher

There are several major applications for intense audio *sound* fields: The *outdoor* propagation of speech and of warning signals, and the sonic fatigue testing of missile and aircraft components. In these applications, several factors combine to make it necessary to limit the portion of the frequency spectrum covered by any one loudspeaker unit. In order to provide adequate power capacity, selection is required between the alternatives of (a) using a large number of identical drivers, (b) using a plurality of drivers each especially designed for a selected portion of the frequency range, and (c) using combinations of these arrangements. In an array currently being used for sonic-fatigue testing, a plurality of large open-cone loudspeakers is used for low frequencies, and a plurality of horns is used for middle and high frequencies. Each horn is driven by several drivers. The driver voice coil and diaphragm proportions have been optimized to withstand fatigue stresses under the *thermal* conditions encountered. The driver is rated at 50-w input for program material. Horn assemblies are available having throat arrays for mounting 6, 12, or 24 drivers. Various applications will be illustrated. © 1961, Acoustical Society of America. All rights reserved.

Previous 1 2 Next

Display 200 results

Back to top

About Scopus

What is Scopus

Content coverage

Scopus blog

Scopus API

Privacy matters

Language

日本語版を表示する

查看简体中文版本

查看繁體中文版本

Просмотр версии на русском языке

Customer Service

Help

Tutorials

Contact us

ELSEVIER

Terms and conditions Privacy policy Cookies settings

All content on this site: Copyright © 2026 Elsevier B.V., its licensors, and contributors. All rights are reserved, including those for text and data mining, AI training, and similar technologies. For all open access content, the relevant licensing terms apply.

RELX™