

TECHNICAL DATA SHEET


Fast-acting epoxy resin adhesive ESK-50

Art. no. 0893 480 1

P. Qty.: 3

Solvent-free two-component adhesive

Chemical basis	Epoxy resin
Colour	Clear, light yellow
Density	1.13 g/cm ³
Density conditions	at 23 °C, 50% relative humidity
Smell/fragrance	Characteristic
Min. processing time	4 min
Min. open time	3 min
Conditions for open time	at 23 °C
Min. final strength	48 h
Processing temperature	30 °C
Min./max. temperature resistance	-60 to +100 °C
Shelf life from production/conditions	36 Month/ at max. 50 °C, no exposure to sunlight, 10 °C to 30 °C
Weight of content	56 g
Product weight (per item)	45.667 g
Contents	50 ml
Container	Double cartridge
Viscosity	11000 mPas
Min. combined tension and shear resistance	20 N/mm ²
Conditions for combined tension and shear resistance	at 23 °C
Solvent-free	Yes

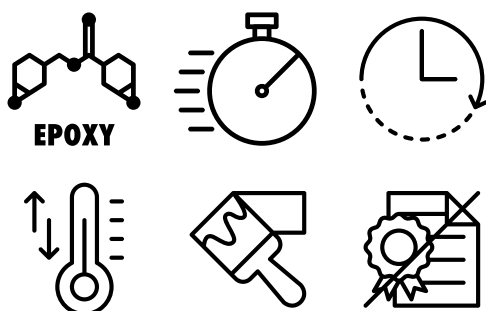

TECHNICAL DATA SHEET

Application area

Suitable for bonding together various materials with high tensile and impact strength and excellent resistance to flaking and shocks. Because the fast-acting adhesive is transparent it is suitable for visually sophisticated adhesives and therefore is an ideal composite for a wide range of applications such as sticking stainless steel sheets together, repairing plastic and metal components that have broken off, manufacturing printed circuit boards, etc.

Suitable surfaces include steel, galvanised steel, aluminium, copper, brass, coated or galvanised metals, sanded glass fibre-reinforced plastic, ABS, hard PVC, SMC, glass, ceramic, concrete, fibre-reinforced plastic/SMC, wood, polyurethane, etc.

Tensile lap-shear strength according to DIN EN 1465:	
Sand blasted, hardening: 16 hours at 40 °C, test temperature 23 °C	
Material	Tensile lap-shear strength
Steel	> 20 N/mm ²
Stainless steel	> 17 N/mm ²
Aluminium	> 13 N/mm ²
Copper	> 15 N/mm ²
Brass	> 15 N/mm ²
GFRP, epoxy	~ 14 N/mm ²
Polyamide 6	~ 4 N/mm ²
ABS	~ 4 N/mm ²
PMMA	~ 3 N/mm ²
PVC	~ 4 N/mm ²
Polycarbonate	~ 4 N/mm ²

Notice

Discolouration due to UV influence is possible.

The usage instructions are recommendations based on the tests we have conducted and are based on our experience; carry out your own tests before each application. Due to the large number of applications and storage and processing conditions, we do not assume any liability for a specific application result. Insofar as our free customer service provides technical information or acts as an advisory service, no responsibility is assumed by this service except where the advice or information given falls within the scope of our specified, contractually agreed service or the advisor was acting deliberately. We guarantee consistent quality of our products. We reserve the right to make technical changes and further develop products.