

TECHNICAL DATA SHEET

Powerbond bodywork adhesive

Art. no. 0893 450 100

P. Qty.: 1 / 6

High-strength 2-component epoxy resin system for bodywork repairs


- Glass particle technology ensures an adhesive layer thickness of 0.25 mm
- Corrosion protection
- Can be through-welded (in its unhardened state)
- Can be sanded and painted over



Container	Double cartridge
Chemical basis	Epoxy resin
Colour	Black
Density	1.1 g/cm ³
Smell/fragrance	Characteristic
Min. tensile strength	30 N/mm ²
Min. combined tension and shear resistance	28 N/mm ²
Conditions for combined tension and shear resistance	after four hours, 23 °C, EN 1465
Conditions for tensile strength	at 23 °C, in accordance with ASTM D-638
Shore D hardness	80
Conditions for Shore hardness	in accordance with DIN 53505
Working life	60 min
Conditions for working life	at 23 °C
Curing time	4 h
Min./max. temperature resistance	-30 to +120 °C
Min./max. processing temperature	15 to 25 °C
Max. short-term temperature resistance	190 °C
Max. final strength	24 h
Conditions for final strength	at 23 °C
Resistance against	Petrol, Diesel, Cooling liquid, Engine and gear oils
VOC-free	Yes
Silicone-free	Yes
Shelf life from production	24 Month

TECHNICAL DATA SHEET

Additional articles	Acetone cleaner, art. 0893460; Quattro rust stop, art. 08932141; pneumatic axial grinder, art. 07032310; Flexi-Disc, art. 0578705 ...; nylon fleece disc, art. 067322 50/75; mini fleece disc, art.
Contents	225 ml

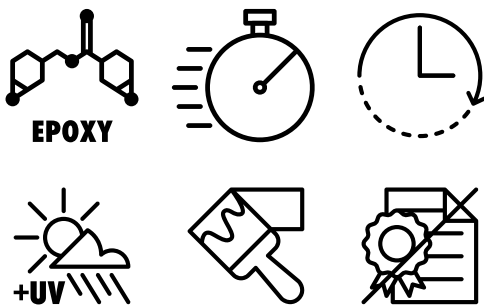

Application area

Structural adhesive for steel, aluminium, stainless steel and glass fibre-reinforced plastics (GFRP, CFRP). For bonding bodywork parts such as mudguards, side walls, wheel arches, roof panels and door panels.

Application information

The substrate must be capable of bearing loads and must be clean, dry and free from grease and rust. Old adhesive residues must also be removed. The cathodic dip coating on new bodywork parts must be roughened. Clean the bonding surfaces thoroughly with acetone or IPA cleaner, roughen them and clean them again. Use Metalyt to protect areas where no adhesive is being applied against corrosion. The first 3 to 5 cm of adhesive should not be used. After this point, the adhesive can be evenly applied to all parts to be bonded and distributed using a spreader (on bare areas), this ensures that these parts are protected against corrosion. Apply a second adhesive bead to the new bodywork part, approx. 5 mm from the edge, to create a force fit. Points at which welding will be carried out at a later point should be excluded.

Press on the new bodywork part with moderate pressure. The new part should not be removed after this point. At the corner points of the bonding and in areas where strain may occur, the parts that have been pressed together are fixed in place approx. every 20 cm using locking pliers. To seal the adhesive seam, any adhesive that escapes during pressing can be redistributed using a plastic trowel. The welding points can be set in line with the manufacturer's specifications. The adhesive must be through-welded when in its unhardened state (within the processing time).

TECHNICAL DATA SHEET

Notice

Not suitable for load-bearing bodywork parts (e.g. A-pillars, longitudinal chassis beams etc.). When replacing parts, do not glue on visible surfaces, as „shadow lines“ may appear. The product must be stored in a frost-free location. For cordless or pneumatic guns, the lowest setting/feed should be used to prevent the cartridge from deforming.

The usage instructions are recommendations based on the tests we have conducted and on our experience; carry out your own tests before each application. Due to the large number of applications and storage and processing conditions, we do not assume any liability for a specific application result. Insofar as our free customer service provides technical information or acts as an advisory service, no responsibility is assumed by this service except where the advice or information given falls within the scope of our specified, contractually agreed service or the advisor was acting deliberately. We ensure the consistent quality of our products. We reserve the right to make technical changes and further develop products.