Top Surface Boundary Condition:

$$-k\nabla T\cdot\vec{n}=q_{\text{arc}}-q_{\text{conv}}-q_{\text{rad}}$$

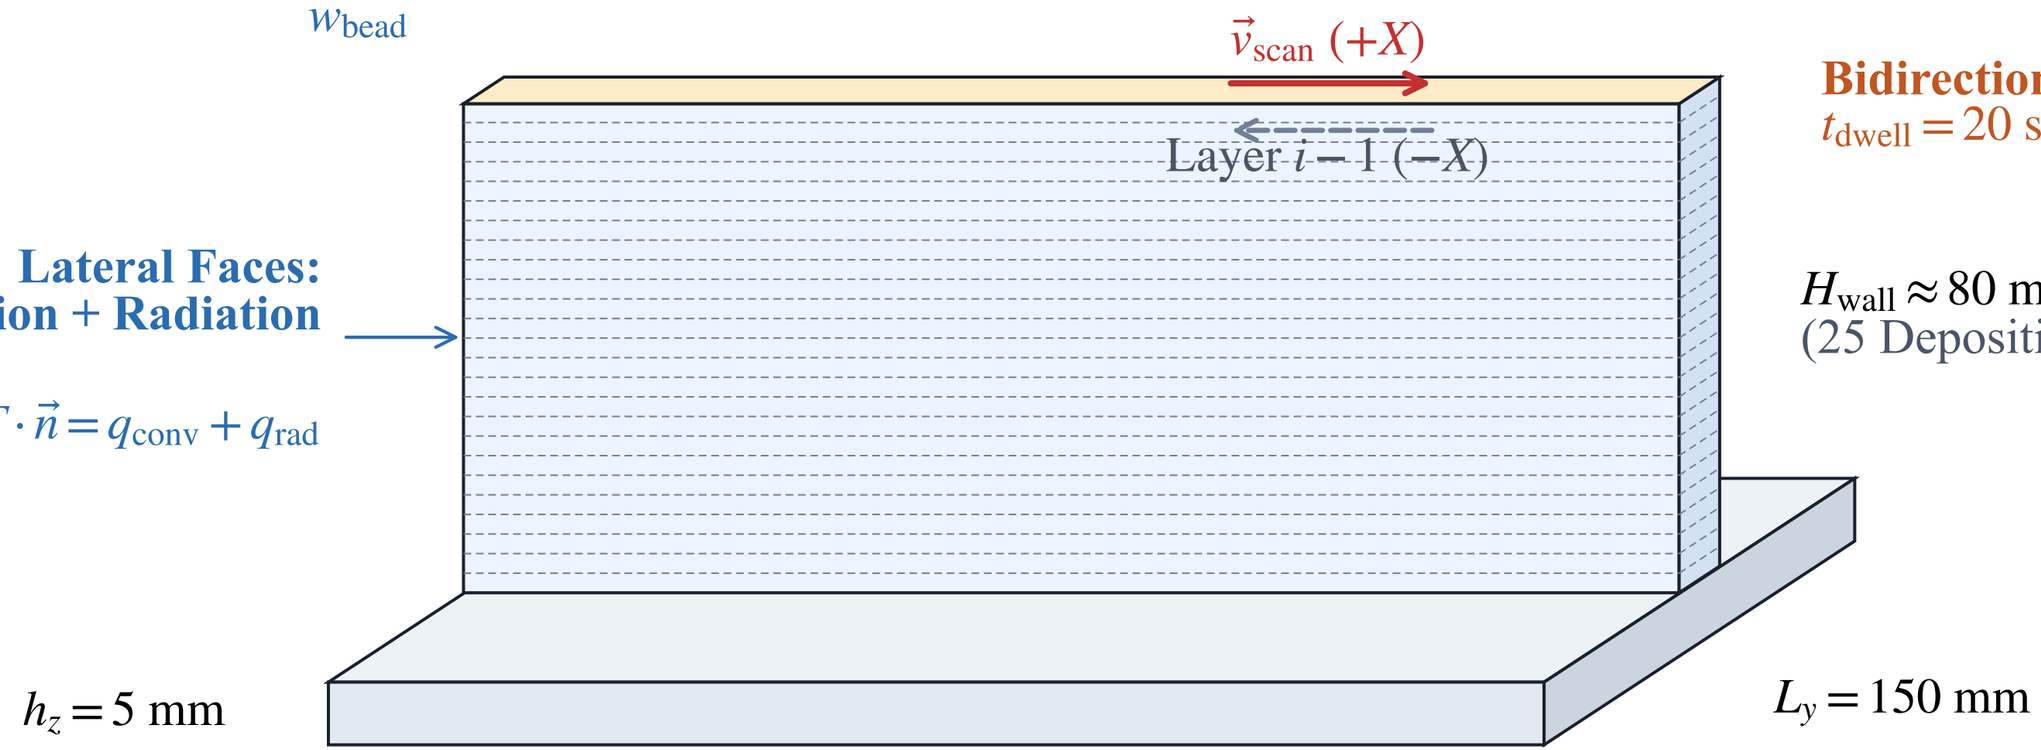

Bidirectional Turnaround

$t_{\text{dwell}} = 20$ s

Lateral Faces:
Convection + Radiation

$$-k\nabla T\cdot\vec{n}=q_{\text{conv}}+q_{\text{rad}}$$

$H_{\text{wall}} \approx 80$ mm
(25 Deposition Layers)

(Wall Length = Heat Sink Length)

Substrate Bottom Heat Extraction:

$$-k\nabla T\cdot\vec{n}=h_{\text{contact}}(T-T_{\text{table}})$$