

Network Topology & Security Audit Report

Generated: May 28, 2026 at 04:21 | Network: 10.0.2.0/24 | Powered by Gemini AI

Executive Summary


A scan of the network segment identified an unexpected exposure of high-risk services on a critical network gateway, increasing the potential for unauthorized access and lateral movement. Immediate investigation and hardening of exposed services on the gateway device is crucial to mitigate significant security vulnerabilities.

Metric	Value
Total Devices	3
Critical Findings	0
Overall Risk	Medium
AI Confidence	High
Incidents Found	0
Scan Time	2026-05-28 04:21
Network	10.0.2.0/24

Immediate Actions Required

- Access control audit recommended for device 10.0.2.2 due to presence of HIGH risk ports.
- Review and restrict access to ports 135 and 445 on device 10.0.2.2.

Network Topology Map

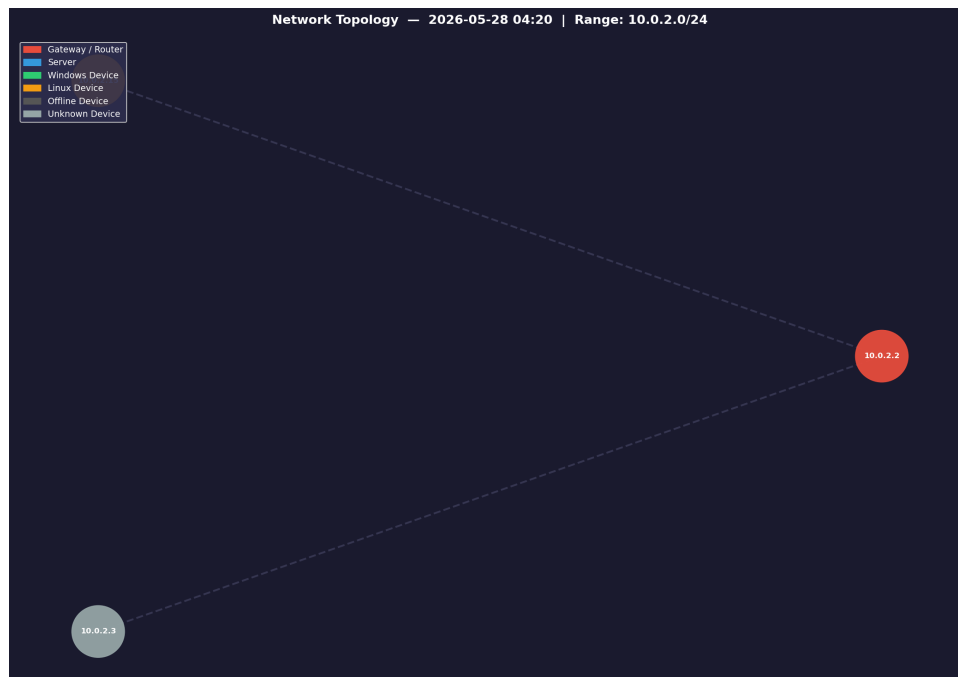

Device-by-Device Analysis

10.0.2.15 — Web Server

OS	Linux 5.0 - 6.2	Risk Score	0/100
Risk Level	Low	Critical Ports	None
Open Ports	{'port': 5000, 'protocol': 'tcp', 'service': 'http', 'version': 'Apache/2.4.18 (Ubuntu)'}	Escalation	NO

No CRITICAL, HIGH, or MEDIUM risk ports detected.

→ Ensure port 5000 is intentionally open and properly secured for its intended application.

10.0.2.2 — Gateway / Router

OS	AT&T BGW210 voice gateway	Risk Score	40/100
Risk Level	Medium	Critical Ports	None
Open Ports	{'port': 135, 'protocol': 'tcp', 'service': 'msrpc', 'version': '1.0.0'}	Escalation	NO

Port 135 (HIGH: +20 points), Port 445 (HIGH: +20 points). Total: 40 points.

- Device with only HIGH risk ports - unusual profile for a gateway.
- Exposure of SMB (445) and RPC (135) on a gateway is a significant security risk.

→ Immediately review and restrict access to ports 135 (RPC) and 445 (SMB). These services should not be publicly exposed, especially on a gateway device.

→ Investigate why these ports are open on this device, as it may indicate misconfiguration or compromise.

→ Implement strong access controls and firewall rules to limit exposure of these services.

10.0.2.3 — Gateway / Router

OS	AT&T BGW210 voice gateway	Risk Score	0/100
Risk Level	Low	Critical Ports	None
Open Ports	{'port': 53, 'protocol': 'tcp', 'service': 'domain', 'version': '1.0.0'}	Escalation	NO

No CRITICAL, HIGH, or MEDIUM risk ports detected.

→ Ensure DNS service on port 53 is configured securely to prevent DNS amplification attacks or unauthorized zone transfers.

Overall Network Recommendations

1. Conduct a comprehensive review of all gateway devices to ensure services like SMB and RPC are not inadvertently exposed.
2. Implement network segmentation to isolate critical infrastructure and devices from less secure segments.
3. Regularly audit network device configurations to identify and remediate misconfigurations promptly.
4. Improve host naming conventions for better device identification and asset management.