


How to Configure Static Route and Default Route to the Routers

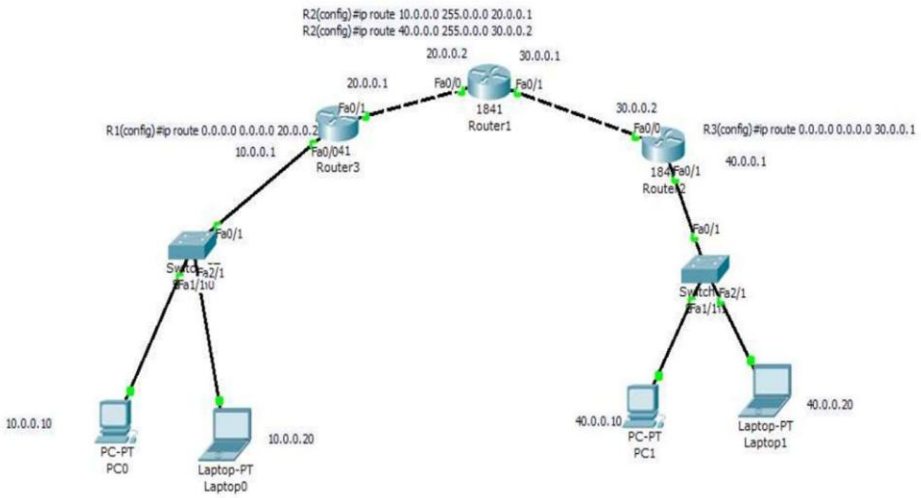

Output:

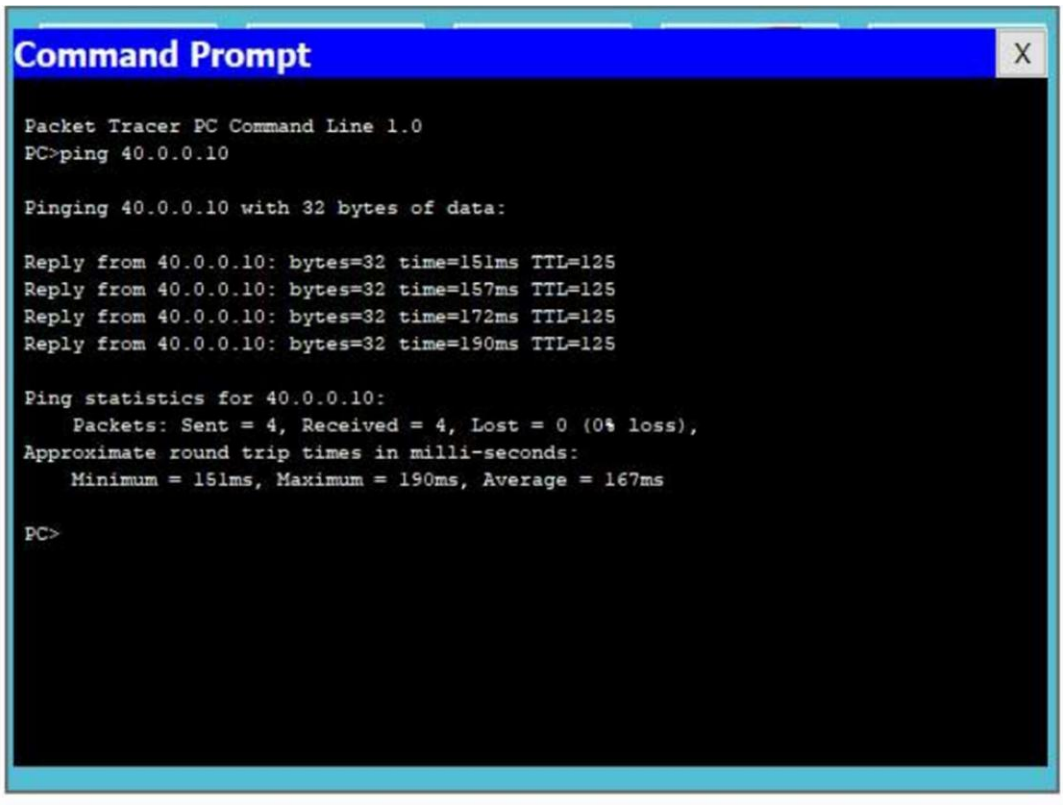

④ How to Configure static route & default route to the routers solution

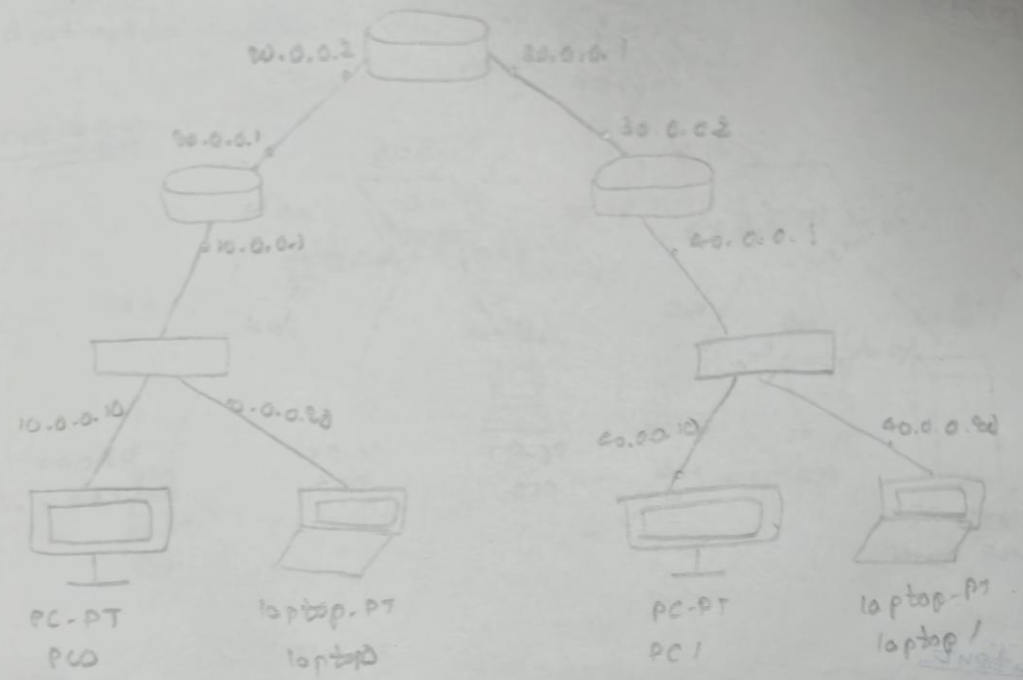

output :-

ping 40.0.0.10

Pinging 40.0.0.10 with 32 bytes of data

Reply from 40.0.0.10 bytes=32 time=151 ms TTL=

Reply from 40.0.0.10 bytes=32 time=157 ms

Reply from 40.0.0.10 bytes=32 time=173 ms

Reply from 40.0.0.10 bytes=32 time=190 ms

ping statics for 40.0.0.10

packets sent=4, received=4, lost=0

approx round trip time

minimum= 151 ms, maximus = 190 ms average = 167 ms