

1. Description


1.1. Project

Project Name	03_Creating_Service
Board Name	NUCLEO-F446RE
Generated with:	STM32CubeMX 5.6.0
Date	11/19/2020

1.2. MCU

MCU Series	STM32F4
MCU Line	STM32F446
MCU name	STM32F446RETx
MCU Package	LQFP64
MCU Pin number	64

2. Pinout Configuration

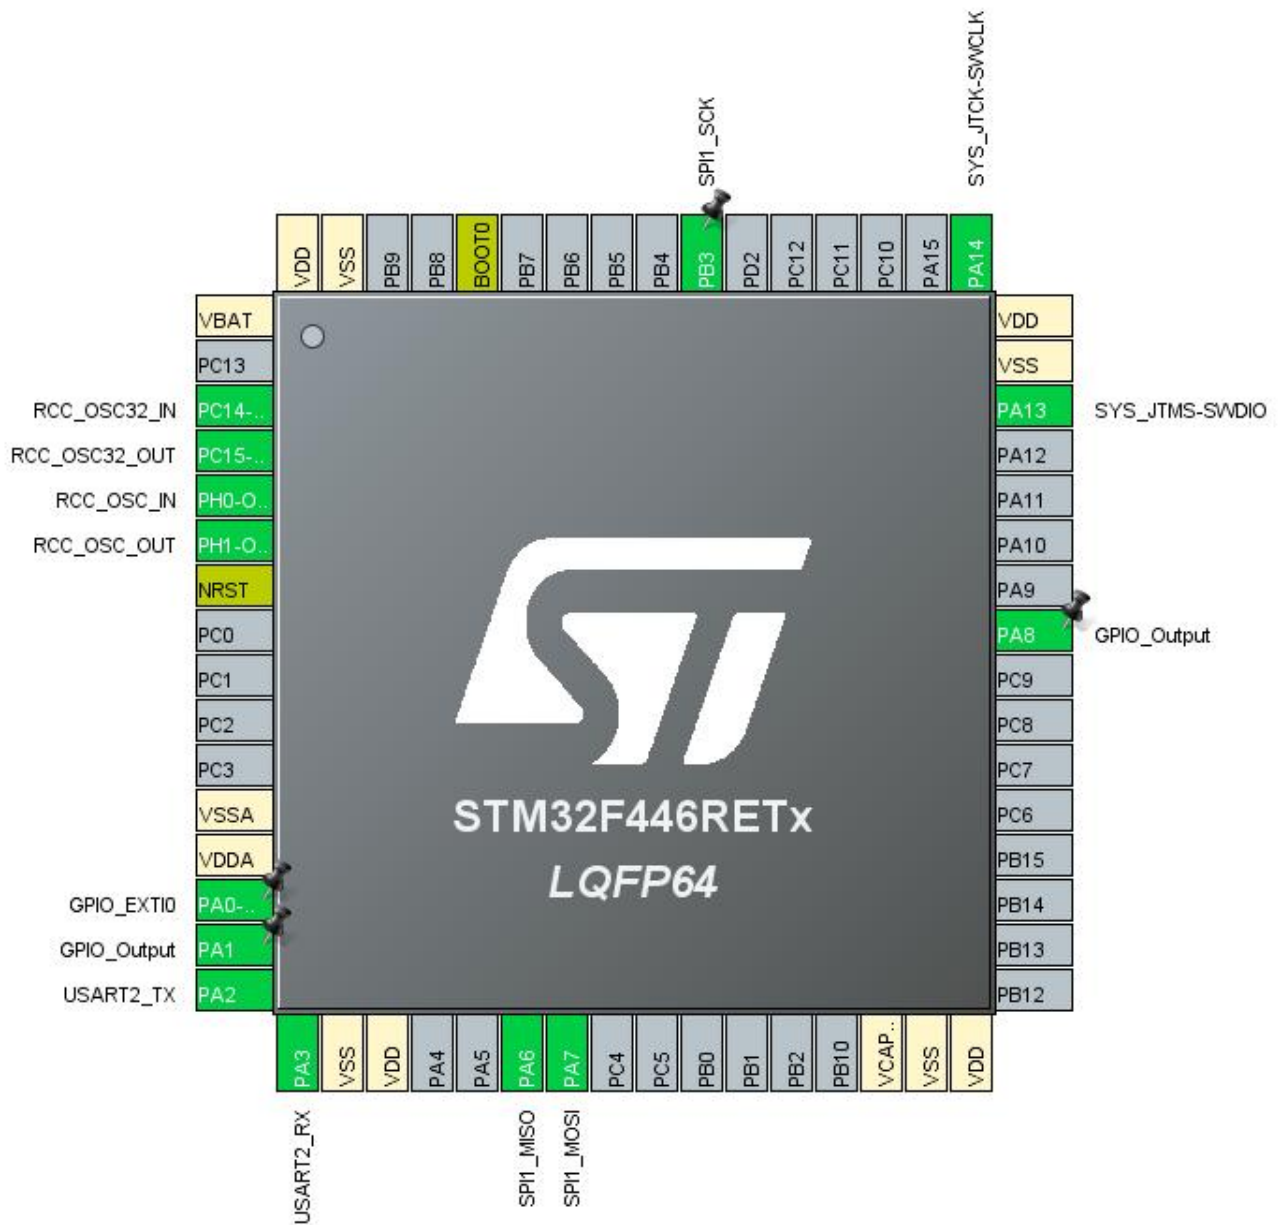


3. Pins Configuration

Pin Number LQFP64	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VBAT	Power		
3	PC14-OSC32_IN	I/O	RCC_OSC32_IN	
4	PC15-OSC32_OUT	I/O	RCC_OSC32_OUT	
5	PH0-OSC_IN	I/O	RCC_OSC_IN	
6	PH1-OSC_OUT	I/O	RCC_OSC_OUT	
7	NRST	Reset		
12	VSSA	Power		
13	VDDA	Power		
14	PA0-WKUP	I/O	GPIO_EXTI0	
15	PA1 *	I/O	GPIO_Output	
16	PA2	I/O	USART2_TX	
17	PA3	I/O	USART2_RX	
18	VSS	Power		
19	VDD	Power		
22	PA6	I/O	SPI1_MISO	
23	PA7	I/O	SPI1_MOSI	
30	VCAP_1	Power		
31	VSS	Power		
32	VDD	Power		
41	PA8 *	I/O	GPIO_Output	
46	PA13	I/O	SYS_JTMS-SWDIO	
47	VSS	Power		
48	VDD	Power		
49	PA14	I/O	SYS_JTCK-SWCLK	
55	PB3	I/O	SPI1_SCK	
60	BOOT0	Boot		
63	VSS	Power		
64	VDD	Power		

* The pin is affected with an I/O function

4. Clock Tree Configuration

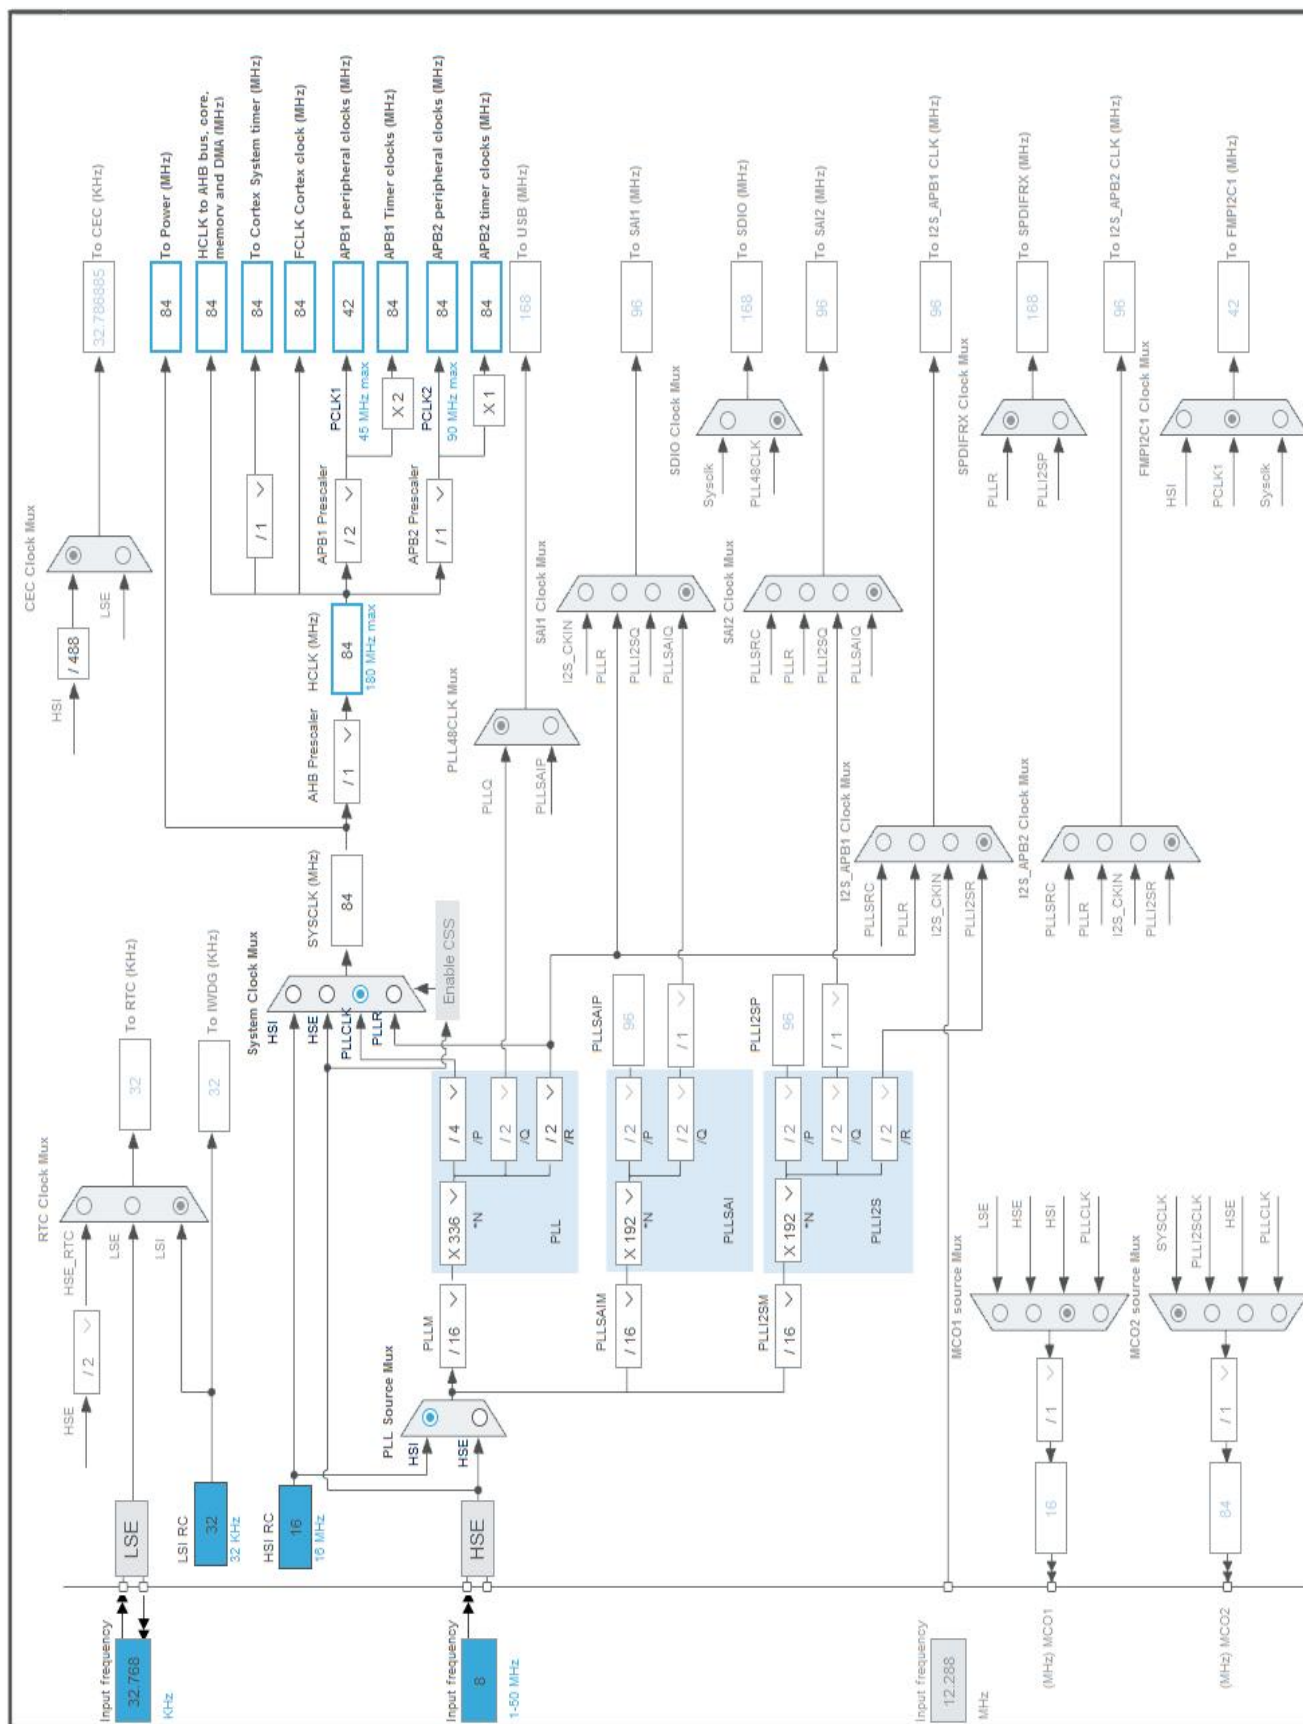

5. Software Project

5.1. Project Settings

Name	Value
Project Name	03_Creating_Service
Project Folder	L:\BLE\Bluetooth_Low_Energy\03_Creating_Service
Toolchain / IDE	EWARM V8.32
Firmware Package Name and Version	STM32Cube FW_F4 V1.25.2

5.2. Code Generation Settings

Name	Value
STM32Cube MCU packages and embedded software	Copy all used libraries into the project folder
Generate peripheral initialization as a pair of '.c/.h' files	No
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No

6. Power Consumption Calculator report

6.1. Microcontroller Selection

Series	STM32F4
Line	STM32F446
MCU	STM32F446RETx
Datasheet	027107_Rev6

6.2. Parameter Selection

Temperature	25
Vdd	3.3

6.3. Battery Selection

Battery	Li-SOCL2(A3400)
Capacity	3400.0 mAh
Self Discharge	0.08 %/month
Nominal Voltage	3.6 V
Max Cont Current	100.0 mA
Max Pulse Current	200.0 mA
Cells in series	1
Cells in parallel	1


6.4. Sequence

Step	Step1	Step2
Mode	RUN	STOP UDM (Under Drive)
Vdd	3.3	3.3
Voltage Source	Battery	Battery
Range	Scale1-High	No Scale
Fetch Type	RAM/FLASH/REGON/ART/P REFETCH	n/a
CPU Frequency	180 MHz	0 Hz
Clock Configuration	HSE PLL	Regulator LP Flash-PwrDwn
Clock Source Frequency	4 MHz	0 Hz
Peripherals		
Additional Cons.	0 mA	0 mA
Average Current	46 mA	55 μ A
Duration	0.1 ms	0.9 ms
DMIPS	225.0	0.0
Ta Max	98.02	104.99
Category	In DS Table	In DS Table

6.5. RESULTS

Sequence Time	1 ms	Average Current	4.65 mA
Battery Life	1 month	Average DMIPS	225.0 DMIPS

6.6. Chart

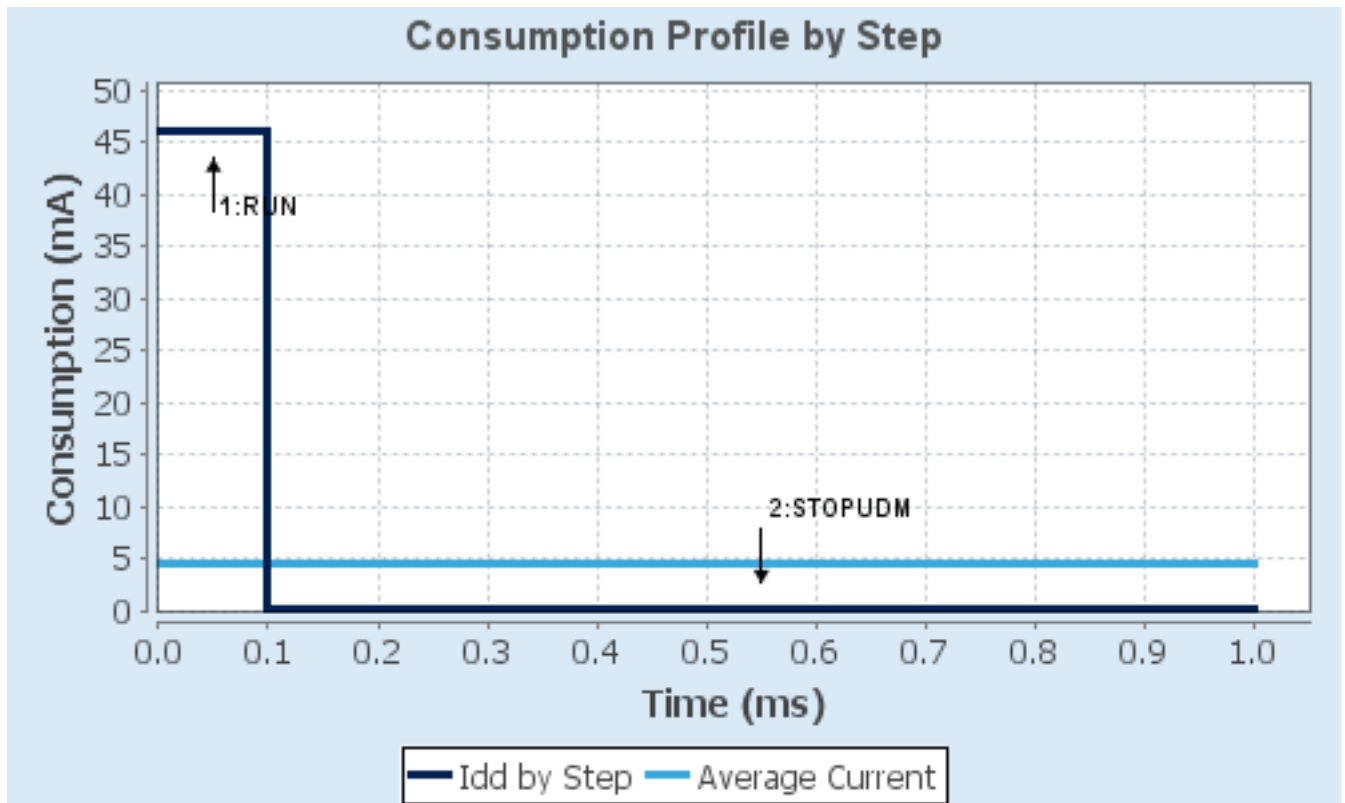

7. IPs and Middleware Configuration

7.1. GPIO

7.2. RCC

High Speed Clock (HSE): BYPASS Clock Source

Low Speed Clock (LSE) : Crystal/Ceramic Resonator

7.2.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Instruction Cache	Enabled
Prefetch Buffer	Enabled
Data Cache	Enabled
Flash Latency(WS)	2 WS (3 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
TIM Prescaler Selection	Disabled
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000

Power Parameters:

Power Regulator Voltage Scale	Power Regulator Voltage Scale 3
Power Over Drive	Disabled

7.3. SPI1

Mode: Full-Duplex Master

7.3.1. Parameter Settings:

Basic Parameters:

Frame Format	Motorola
Data Size	8 Bits
First Bit	MSB First

Clock Parameters:

Prescaler (for Baud Rate)	16 *
Baud Rate	5.25 MBits/s *
Clock Polarity (CPOL)	Low
Clock Phase (CPHA)	1 Edge

Advanced Parameters:

CRC Calculation	Disabled
NSS Signal Type	Software

7.4. SYS

Debug: Serial Wire

Timebase Source: SysTick

7.5. USART2

Mode: Asynchronous

7.5.1. Parameter Settings:

Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples

7.6. STMicroelectronics.X-CUBE-BLE1.5.0.0

mode: WirelessJjBlueNRGAaMS

7.6.1. Parameter Settings:

Log & Debug:

BLE1_DEBUG	No debug message (0)
PRINT_CSV_FORMAT	CSV format message print disabled (0)

HCI Basic Parameters:

HCI_READ_PACKET_SIZE	128 Bytes reserved for HCI Read Packet
HCI_MAX_PAYLOAD_SIZE	128 Bytes reserved for HCI Max Payload

Connection Parameters (for expert users):

Scan Interval (SCAN_P)	16384
Scan Window (SCAN_L)	16384
Supervision Timeout (SUPERV_TIMEOUT)	60
Min Connection Period (CONN_P1)	40

Max Connection Period (CONN_P2)	40
Min Connection Length (CONN_L1)	2000
Max Connection Length (CONN_L2)	2000
Advertising Type (ADV_DATA_TYPE)	Connectable Undirected Advertising (ADV_IND)
Min Advertising Interval (ADV_INTERV_MIN)	2048
Max Advertising Interval (ADV_INTERV_MAX)	4096
Min Connection Event Interval (L2CAP_INTERV_MIN)	9
Max Connection Event Interval (L2CAP_INTERV_MAX)	20
Timeout Multiplier (L2CAP_TIMEOUT_MULTIPLIER)	600

*** User modified value**

8. System Configuration

8.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
RCC	PC14-OSC32_IN	RCC_OSC32_IN	n/a	n/a	n/a	
	PC15-OSC32_OUT	RCC_OSC32_OUT	n/a	n/a	n/a	
	PH0-OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	PH1-OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
SPI1	PA6	SPI1_MISO	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
	PA7	SPI1_MOSI	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
	PB3	SPI1_SCK	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
SYS	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	
USART2	PA2	USART2_TX	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
	PA3	USART2_RX	Alternate Function Push Pull	No pull-up and no pull-down	Very High *	
GPIO	PA0-WKUP	GPIO_EXTI0	External Interrupt Mode with Rising edge trigger detection	No pull-up and no pull-down	n/a	
	PA1	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	
	PA8	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	

8.2. DMA configuration

nothing configured in DMA service

8.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Pre-fetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
EXTI line 0 interrupt	unused		
SPI1 global interrupt	unused		
USART2 global interrupt	unused		
FPU global interrupt	unused		

* User modified value

9. Predefined Views - Category view : Current

Middleware

Additional Software

X-CUBE-BLE1 

System Core

Analog

Timers

Connectivity

Multimedia

Computing

DMA

SPI1 

GPIO 

USART2 

IVIC 

RCC 

SYS 

10. Software Pack Report

10.1. Software Pack selected

Vendor	Name	Version	Component
STMicroelectronics	X-CUBE-BLE1	5.0.0	Class : Wireless Group : Controller Version : 4.4.0 Class : Wireless Group : HCI_TL Variant : Basic Version : 4.4.0 Class : Wireless Group : HCI_TL_INTERFACE Variant : UserBoard Version : 4.4.0 Class : Wireless Group : Utils Version : 4.4.0