


To construct a VLAN and make the PC's communicate among a VLAN

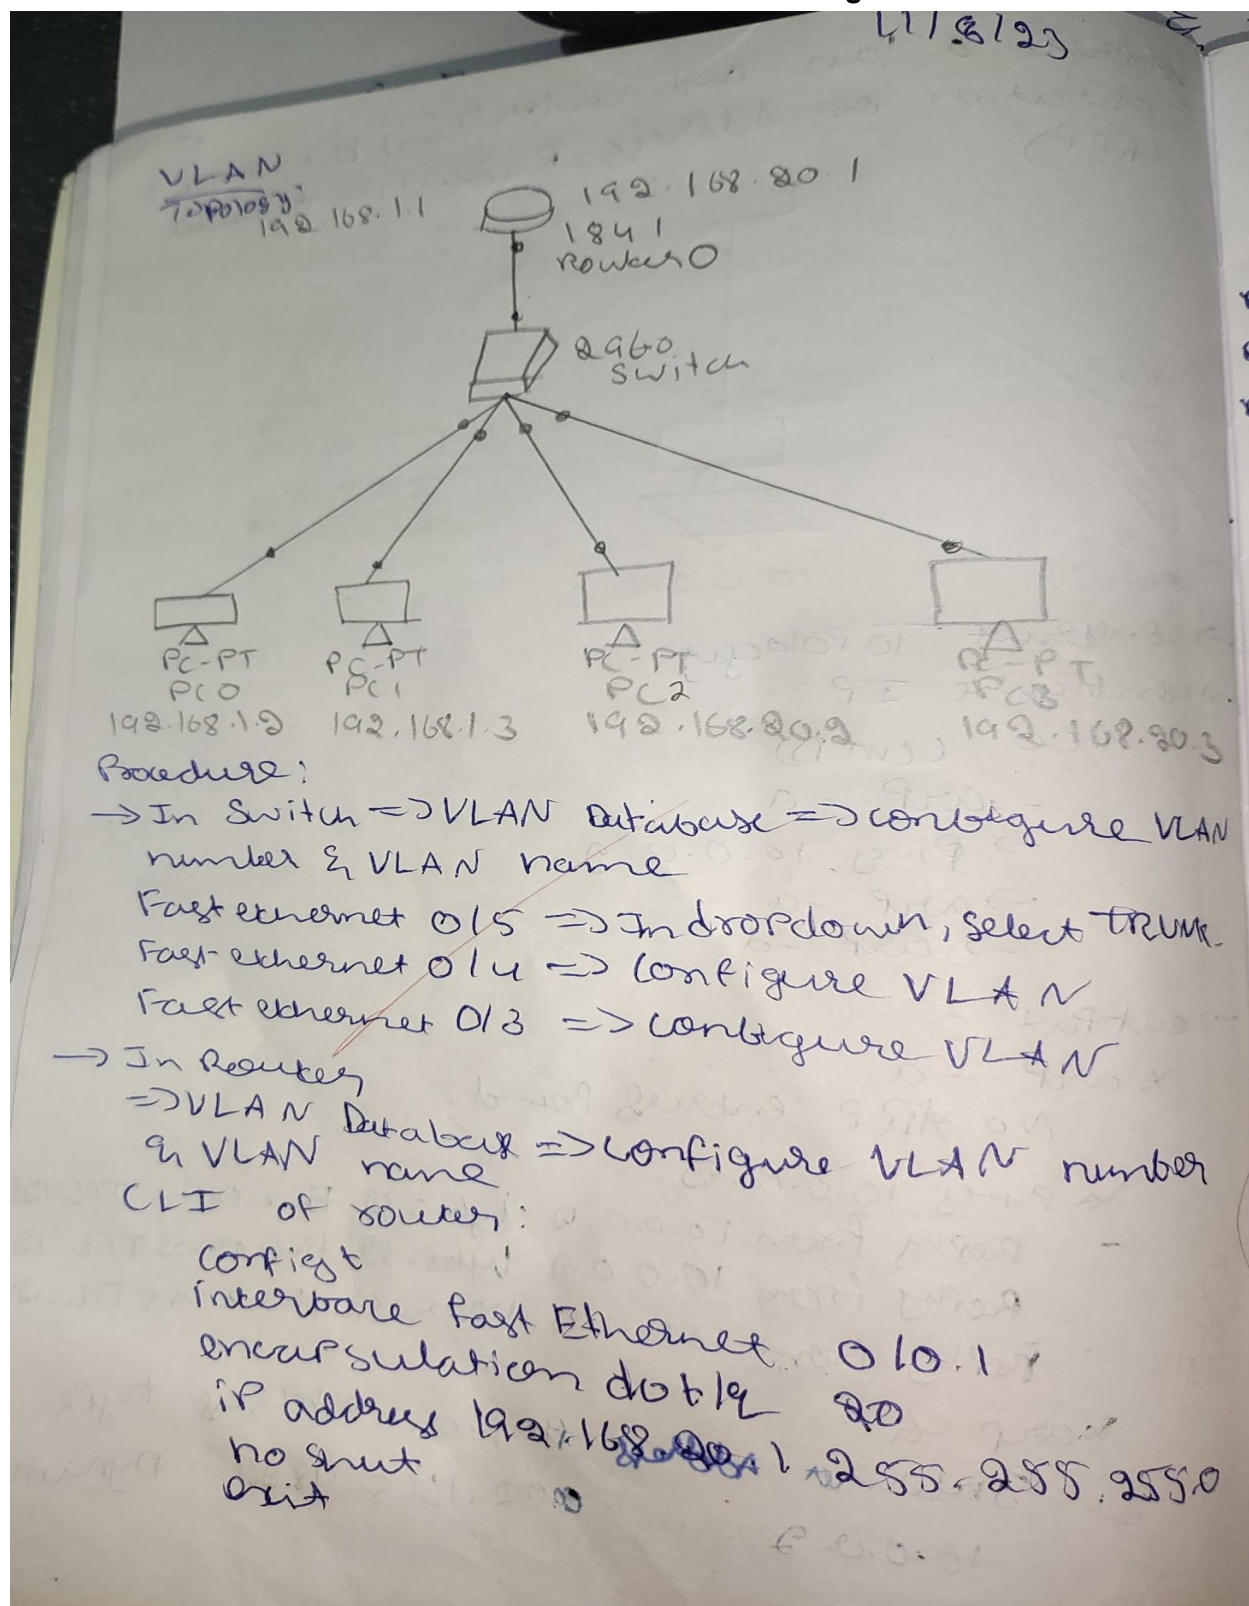

Output

Ping 192.168.20.3


Pinging 192.168.20.3 with 32 bytes of data:

Reply from 192.168.20.3: bytes=32 time=0ms TTL=127  
Reply from 192.168.20.3: bytes=32 time=0ms TTL=127  
Reply from 192.168.20.3: bytes=32 time=0ms TTL=127  
Reply from 192.168.20.3: bytes=32 time=0ms TTL=127

Ping statistics for 192.168.20.3:

Packets: Sent = 4, Received = 4, Lost = 0 (0% loss)

## Topology:

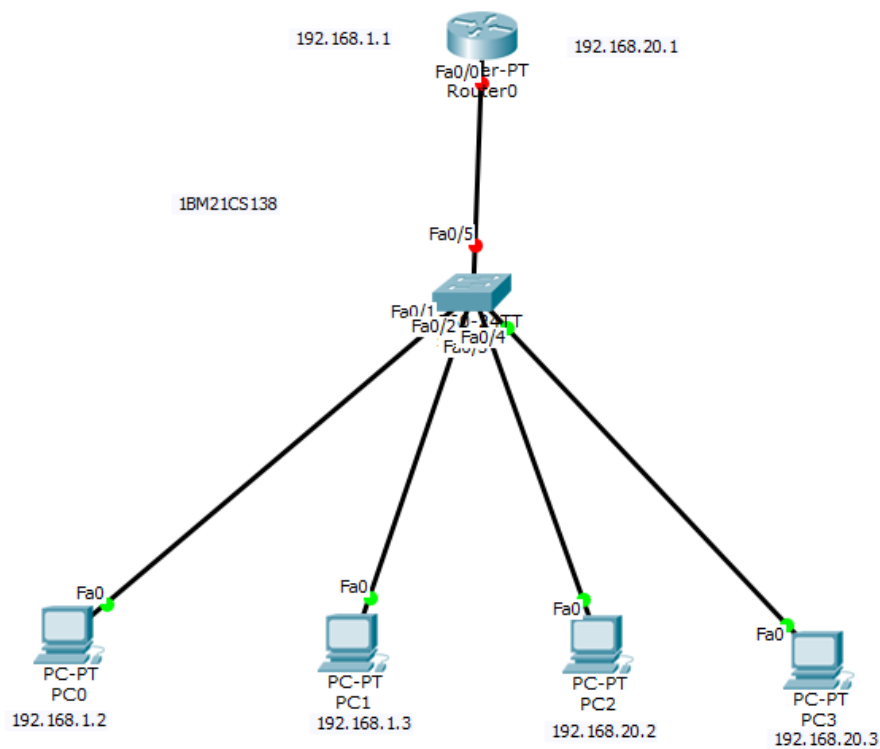

## Output:

```
C:\>ping 192.168.2.2

Pinging 192.168.2.2 with 32 bytes of data:

Request timed out.
Reply from 192.168.2.2: bytes=32 time<1ms TTL=127
Reply from 192.168.2.2: bytes=32 time<1ms TTL=127
Reply from 192.168.2.2: bytes=32 time<1ms TTL=127

Ping statistics for 192.168.2.2:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```