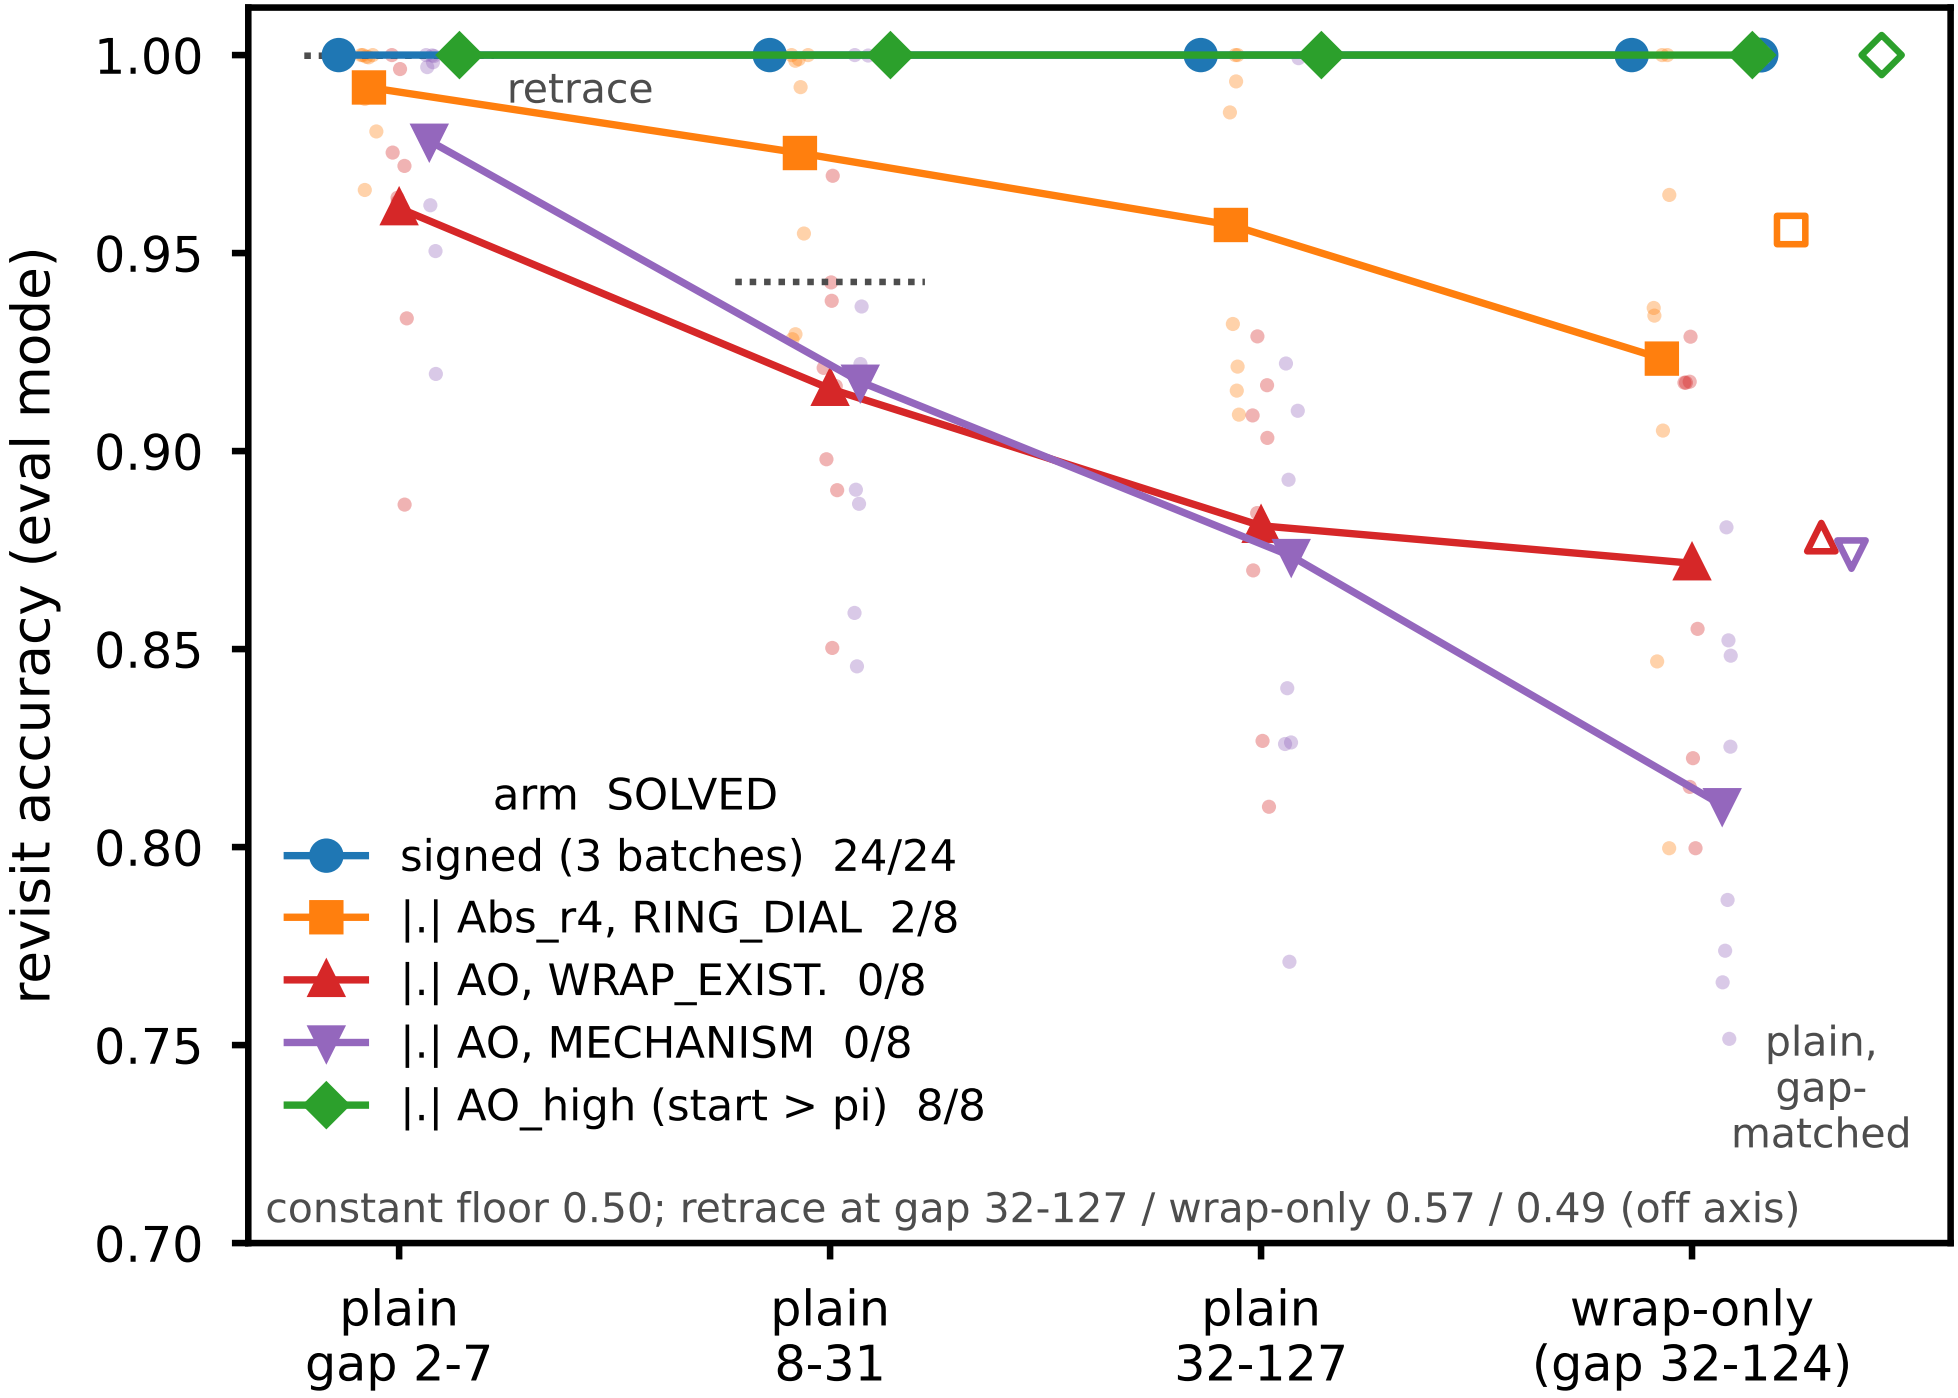
1.00
0.95
0.90
0.85
0.80
0.75
0.70
revisit accuracy (eval mode)
retrace
arm SOLVED
signed (3 batches) 24/24
|.| Abs_r4, RING_DIAL 2/8
|.| AO, WRAP_EXIST. 0/8
|.| AO, MECHANISM 0/8
|.| AO_high (start > pi) 8/8
plain, gap-matched
constant floor 0.50; retrace at gap 32-127 / wrap-only 0.57 / 0.49 (off axis)
plain gap 2-7
plain 8-31
plain 32-127
wrap-only (gap 32-124)