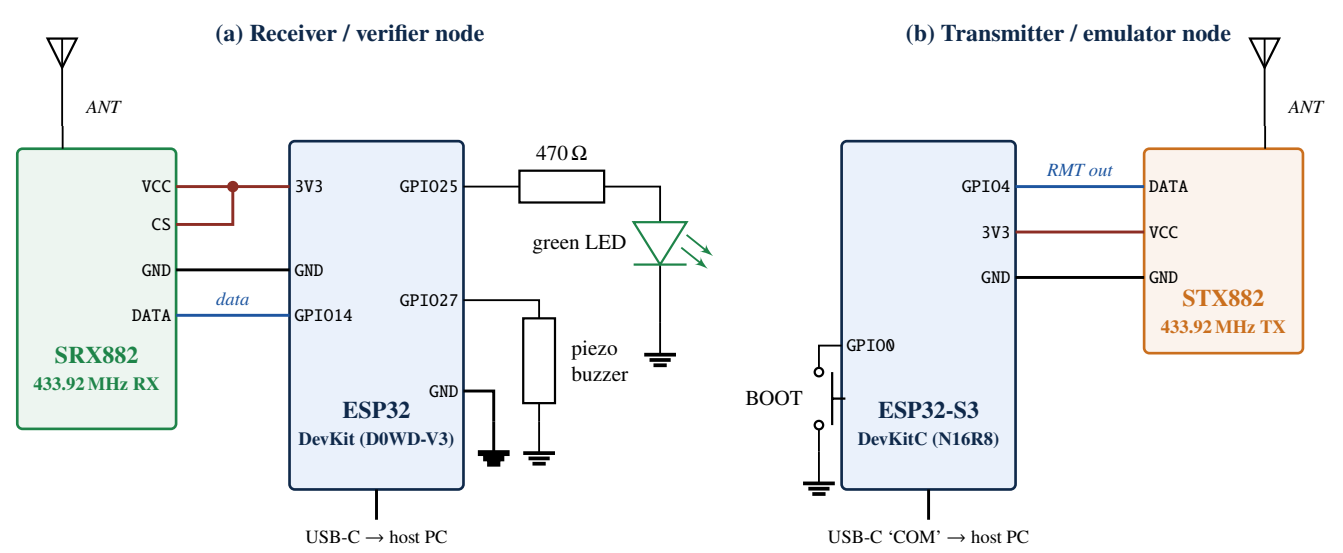

(a) Receiver / verifier node
ANT
VCC
CS
GND
DATA
SRX882
433.92 MHz RX
data
3V3
GND
GPIO14
GPIO25
GPIO27
GND
ESP32
DevKit (D0WD-V3)
470 Ω
green LED
piezo
buzzer
USB-C → host PC
(b) Transmitter / emulator node
ANT
GPIO4
3V3
GND
GPIO0
BOOT
ESP32-S3
DevKitC (N16R8)
RMT out
DATA
VCC
GND
STX882
433.92 MHz TX
USB-C 'COM' → host PC