

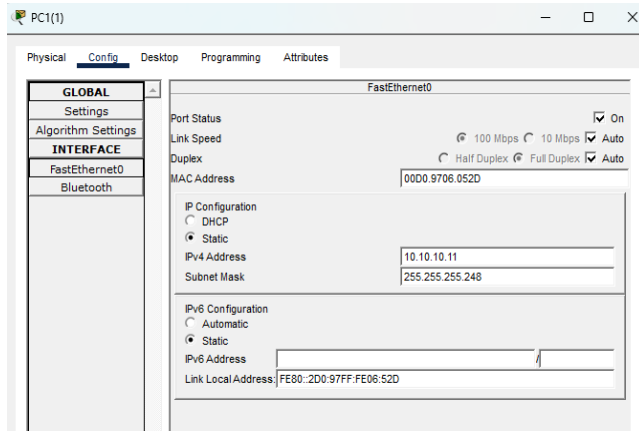
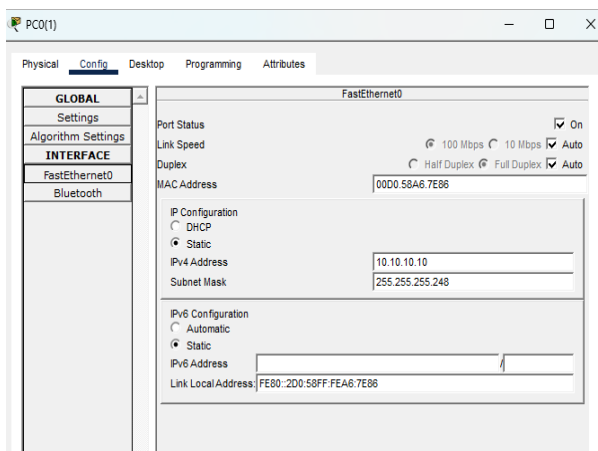
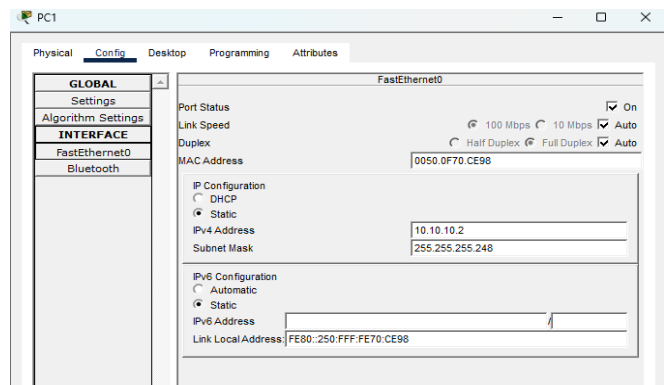
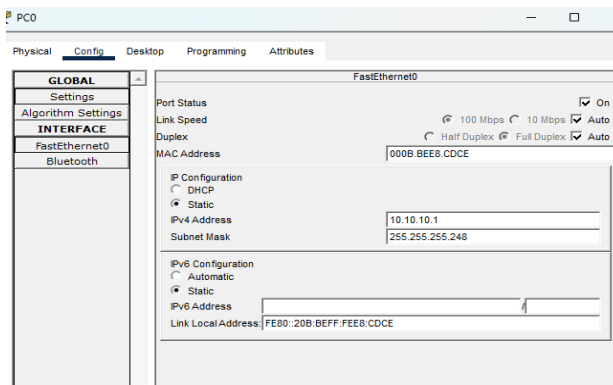


LAB 1

1. Create 2 LAN networks using a single switch (Each network has 5 computers each) with the following IP address. 10.10.10.0/29

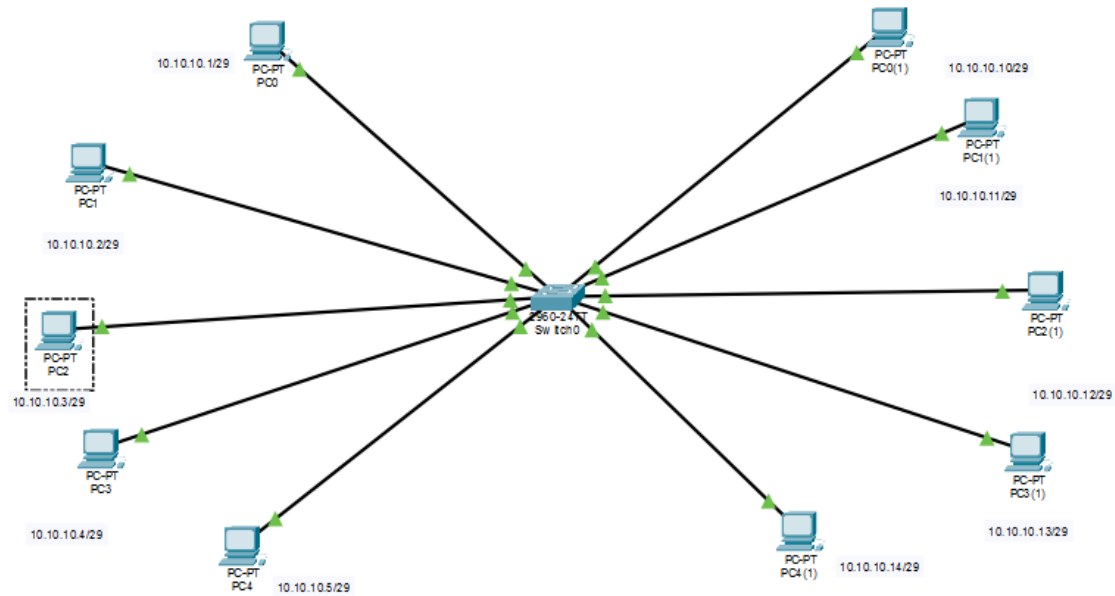

LAN 1 – LAN 1

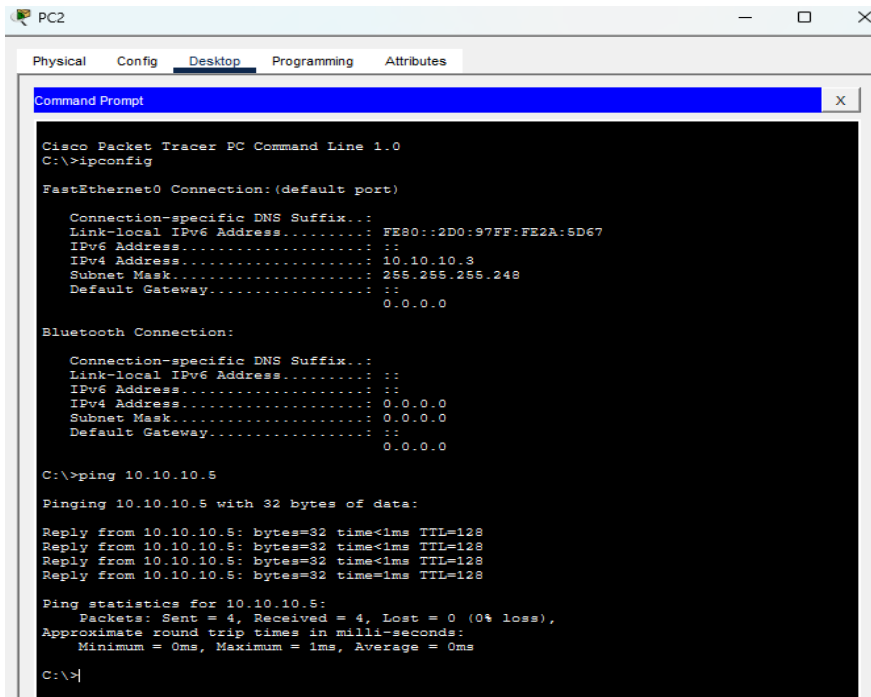

```
PC2

Physical  Config  Desktop  Programming  Attributes

Command Prompt

Cisco Packet Tracer PC Command Line 1.0
C:\>ipconfig

FastEthernet0 Connection: (default port)

    Connection-specific DNS Suffix...:
    Link-local IPv6 Address . . . . .: FE80::2D0:97FF:FE2A:5D67
    IPv6 Address . . . . .: ::
    IPv4 Address . . . . .: 10.10.10.3
    Subnet Mask . . . . .: 255.255.255.248
    Default Gateway . . . . .: ::
                                0.0.0.0

Bluetooth Connection:

    Connection-specific DNS Suffix...:
    Link-local IPv6 Address . . . . .: ::
    IPv6 Address . . . . .: ::
    IPv4 Address . . . . .: 0.0.0.0
    Subnet Mask . . . . .: 0.0.0.0
    Default Gateway . . . . .: ::
                                0.0.0.0

C:\>ping 10.10.10.5


Pinging 10.10.10.5 with 32 bytes of data:

Reply from 10.10.10.5: bytes=32 time<1ms TTL=128
Reply from 10.10.10.5: bytes=32 time<1ms TTL=128
Reply from 10.10.10.5: bytes=32 time<1ms TTL=128
Reply from 10.10.10.5: bytes=32 time<1ms TTL=128

Ping statistics for 10.10.10.5:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>|
```

LAN 2 – LAN 2

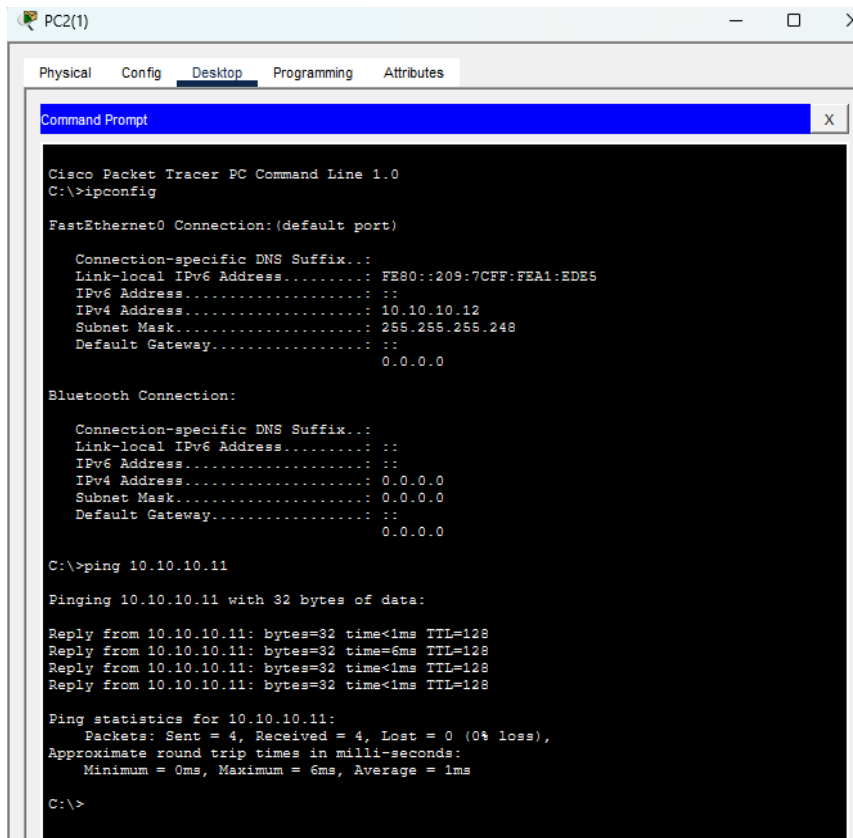

```
PC2(1)

Physical  Config  Desktop  Programming  Attributes

Command Prompt

Cisco Packet Tracer PC Command Line 1.0
C:\>ipconfig

FastEthernet0 Connection: (default port)

    Connection-specific DNS Suffix...:
    Link-local IPv6 Address . . . . .: FE80::209:7CFF:FEA1:EDE5
    IPv6 Address . . . . .: ::
    IPv4 Address . . . . .: 10.10.10.12
    Subnet Mask . . . . .: 255.255.255.248
    Default Gateway . . . . .: ::
                                0.0.0.0

Bluetooth Connection:

    Connection-specific DNS Suffix...:
    Link-local IPv6 Address . . . . .: ::
    IPv6 Address . . . . .: ::
    IPv4 Address . . . . .: 0.0.0.0
    Subnet Mask . . . . .: 0.0.0.0
    Default Gateway . . . . .: ::
                                0.0.0.0

C:\>ping 10.10.10.11


Pinging 10.10.10.11 with 32 bytes of data:

Reply from 10.10.10.11: bytes=32 time<1ms TTL=128
Reply from 10.10.10.11: bytes=32 time=6ms TTL=128
Reply from 10.10.10.11: bytes=32 time<1ms TTL=128
Reply from 10.10.10.11: bytes=32 time<1ms TTL=128

Ping statistics for 10.10.10.11:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 6ms, Average = 1ms

C:\>
```

LAN 2 – LAN 1

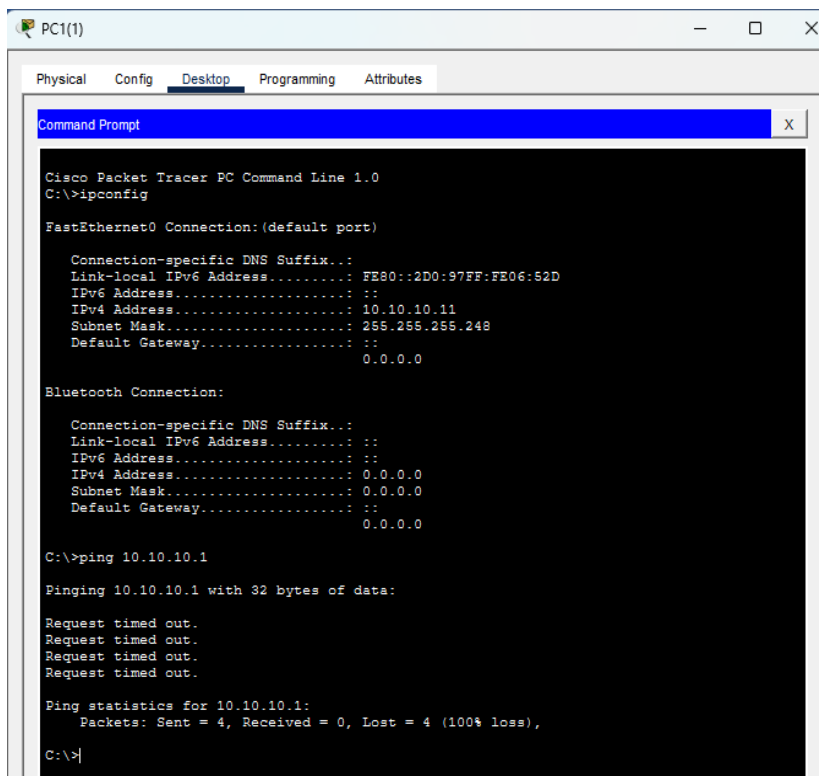

PC1(1)

Physical Config Desktop Programming Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ipconfig

FastEthernet0 Connection: (default port)

    Connection-specific DNS Suffix...:
    Link-local IPv6 Address . . . . .: FE80::2D0:97FF:FE06:52D
    IPv6 Address . . . . .: ::
    IPv4 Address . . . . .: 10.10.10.11
    Subnet Mask . . . . .: 255.255.255.248
    Default Gateway . . . . .: ::
                                0.0.0.0

Bluetooth Connection:

    Connection-specific DNS Suffix...:
    Link-local IPv6 Address . . . . .: ::
    IPv6 Address . . . . .: ::
    IPv4 Address . . . . .: 0.0.0.0
    Subnet Mask . . . . .: 0.0.0.0
    Default Gateway . . . . .: ::
                                0.0.0.0

C:\>ping 10.10.10.1


Pinging 10.10.10.1 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 10.10.10.1:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>|
```

LAN 1 – LAN 2

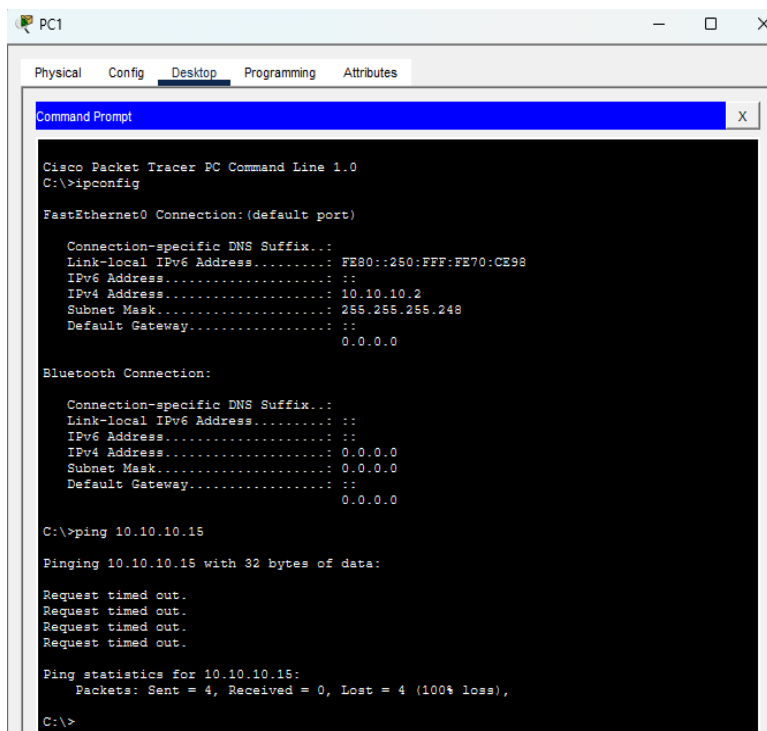

PC1

Physical Config Desktop Programming Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ipconfig

FastEthernet0 Connection: (default port)

    Connection-specific DNS Suffix...:
    Link-local IPv6 Address . . . . .: FE80::250:FFF:FE70:CE98
    IPv6 Address . . . . .: ::
    IPv4 Address . . . . .: 10.10.10.2
    Subnet Mask . . . . .: 255.255.255.248
    Default Gateway . . . . .: ::
                                0.0.0.0

Bluetooth Connection:

    Connection-specific DNS Suffix...:
    Link-local IPv6 Address . . . . .: ::
    IPv6 Address . . . . .: ::
    IPv4 Address . . . . .: 0.0.0.0
    Subnet Mask . . . . .: 0.0.0.0
    Default Gateway . . . . .: ::
                                0.0.0.0

C:\>ping 10.10.10.15

Pinging 10.10.10.15 with 32 bytes of data:

Request timed out.
Request timed out.
Request timed out.
Request timed out.

Ping statistics for 10.10.10.15:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\>
```