

Notes:

- of Fe500 is to be used for beams and slab.
- 2. Clear cover to Reinforcement is 30 mm unless noted otherwise.
- 3. Spacer bars between two layers are to be placed
- 4. Do not scale this drawing.

- 1. Concrete Grade of M30 and Reinforcement grade
- at 500 mm c/c.


STRUCTURAL CONSULTANT

Down Town City Centre, Office No 5B,5th Floor, S. No 8 + 23/1/2, Near Mhatre Bridge, Erandwane, Pune - 411 004, INDIA


INFRASTRUCTURE CONSULTANT

Down Town City Centre, Office No 58,5th Floor, S. No 8 + 23/1/2, Near Mhalre Bridge, Erandwane, Pune - 411 004, INDIA

KEY PLAN





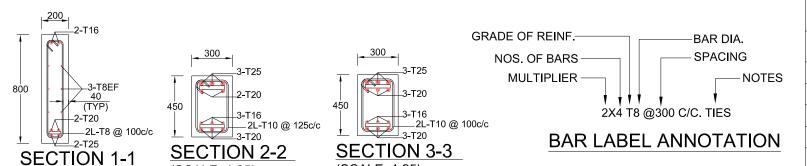

(SCALE: 1:25)

(SCALE: 1:50)

LAP LENGTH	
DIA(mm)	LENGTH
10	450
12	540
16	720
20	900
25	1125
32	1440

ABBREVIATIONS	
Т	Fe 500 Reinforcement
TYP	Typical
В	Beam
SSL	Structural slab level
SFR	Side Face Reinforcement



REVISION SCHEDULE

RECEIVED AT SITE: SIGN AND DATE

CLIENT:TOTAL ENVIRONMENT BUILDING SYSTEMS PVT. LTD.

LANDSCAPE / SERVICES / STRUCTURES



shibanee & kamal EPIP Zone Whitefield, Bangalore-560 06 P: +91 80 42453000, www.total-environment.


CHECKED FOR COORDINATION STRUCTURAL LANDSCAPE SERVICES APPROVED BY: AB CHECKED BY: PM DRAWN BY: VM DESIGNED BY: YM DATE: 04/01/2022 PROJECT NO:PROJECT NAME: IN THAT QUIET EARTH 0063 APMRESS: BILESHIVALE, BANGALORE

REVIEW TENDER PURPOSE: REFERENCE CONSTRUCTION

SCALE @ A3: AS SHOWN SUB PROJECT: TOWER 4

SHEET TITLE BLOCK B4 BEAM REINF. **ELEVATIONS SSL16 (SHEET-1)**

S8-B04-128A R0

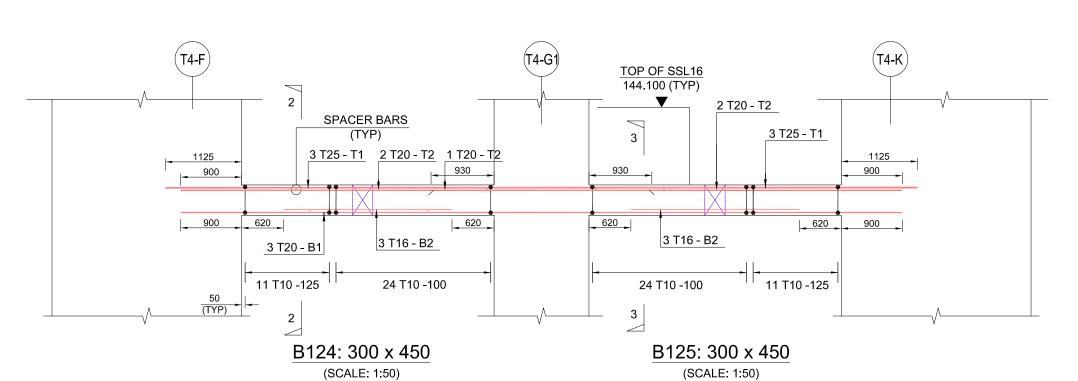

(SCALE: 1:25)

(SCALE: 1:25)