


How To Remove the Card Reader from the MS1™


This task topic discusses how to remove the **card reader** entry slot of the IPS Group, Inc. **MS1™**. This may be helpful to clear a jam.

To remove the card reader:

1. Quickly insert and remove a Diagnostic card into the **MSPM** card reader to enter Diagnostics mode.
2. From the Diagnostics menu, put the meter into SLEEP mode.
3. Use the key (manual or electronic) to unlock and open the meter **cabinet** / door.
4. Disconnect the cables to the card reader.
5. Using a Phillips head screwdriver, remove the four screws on the rear of the **pay station** door (denoted by 1's in the following figure).

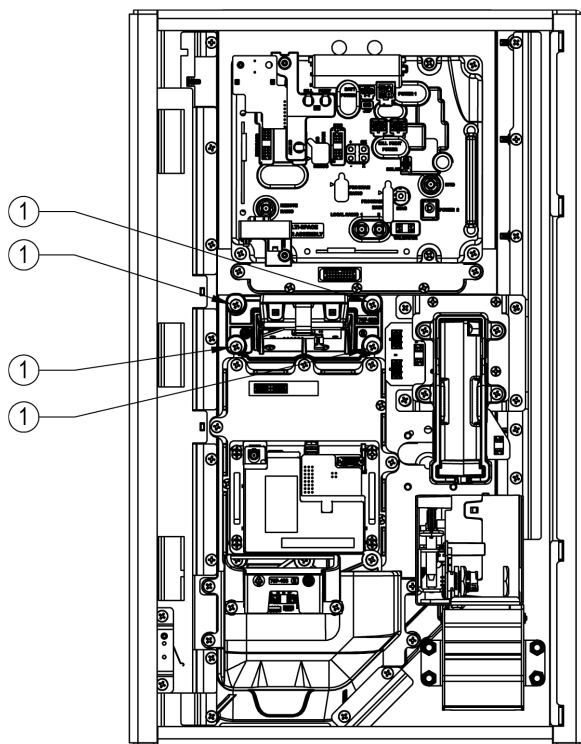

6. Grip each side of the card reader, and carefully pull the card reader away from the pay station door.

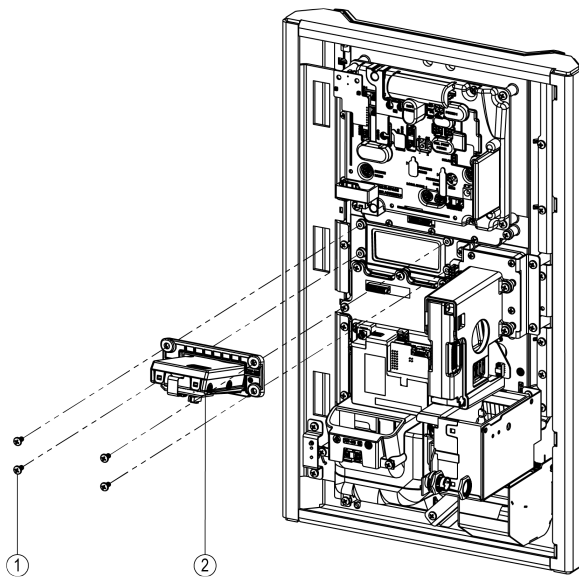

7. With the card reader removed, clear all obstructions from the card reader.

To re-install, follow this procedure in reverse order.