

# How To Replace an SSPM Coin Slot

This task topic discusses how to replace a SSPM coin slot.


The M3™ SSPM coin entry slot can easily be changed to accept coins of different sizes. To replace the coin slot, remove the Card Entry Slot (as shown below) and the Coin Validator. The coin slot should easily slide out. Insert the new coin slot with the notch-side up, replace the coin validator, and the card entry slot to complete the installation.

To replace a coin slot on the SSPM:


1. Remove the meter mechanism from the meter base housing.
2. Remove the validator screw from the front of the meter mechanism.
3. Pull the validator from the rear of the meter mechanism by squeezing the spring loaded retention clip.
4. Carefully disconnect the keypad from the meter mechanism at the ribbon harness (circled in red in the following figure).



5. Remove 2 screws from the rear of the meter mechanism, and remove the card reader casting.

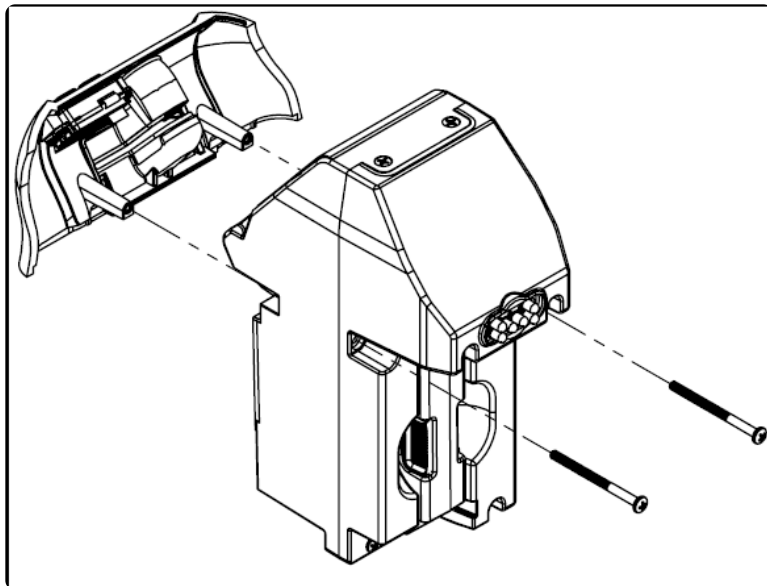

6. Lift the coin slot to remove it from the meter mechanism.

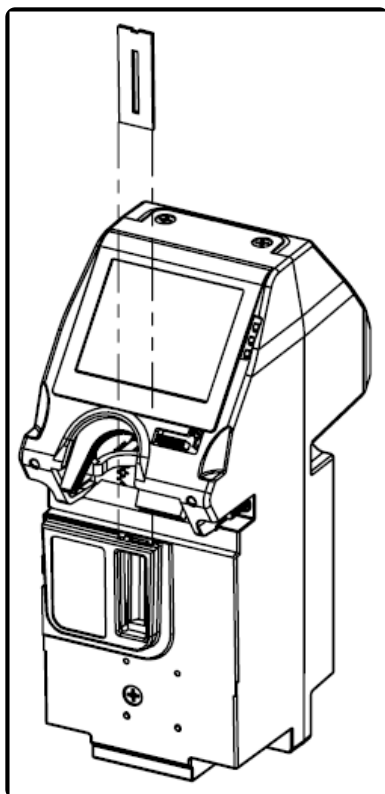

7. Insert a new coin slot into the meter mechanism, and reassemble the meter assembly / meter base housing in reverse order.