


Step 1: Find the IP address of linux.

Step 2: Install the Nessus tool ,click the new scan.

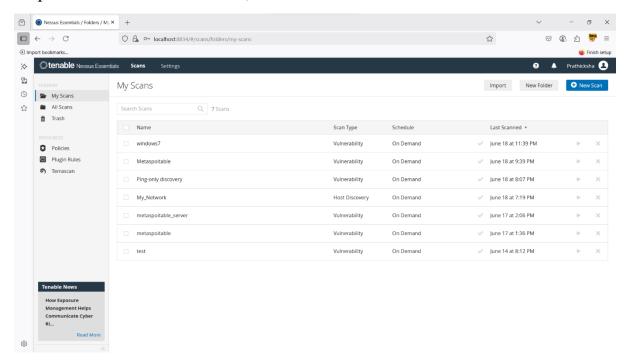



Step 3 : Go to basic scan, type target as <target ip /24>, here 24 is the full scan.

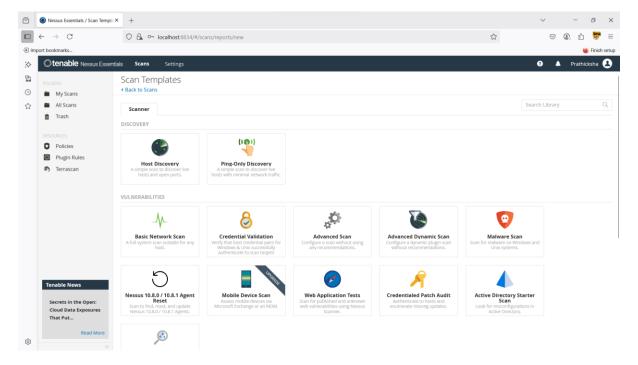

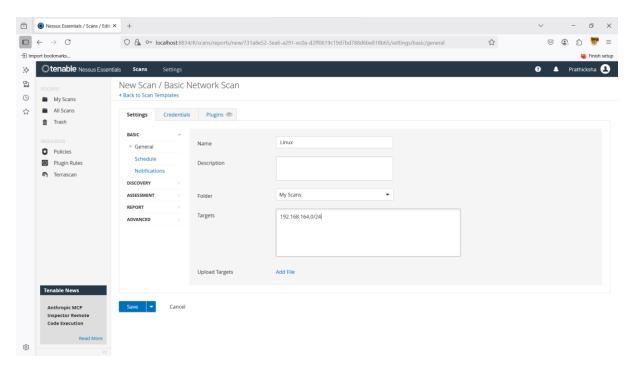

Step 4: scan all ports, give quick scan.

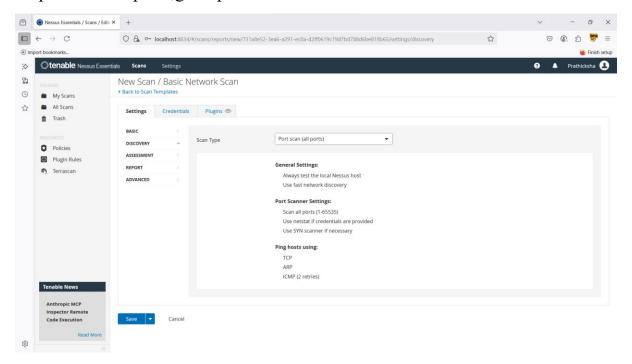

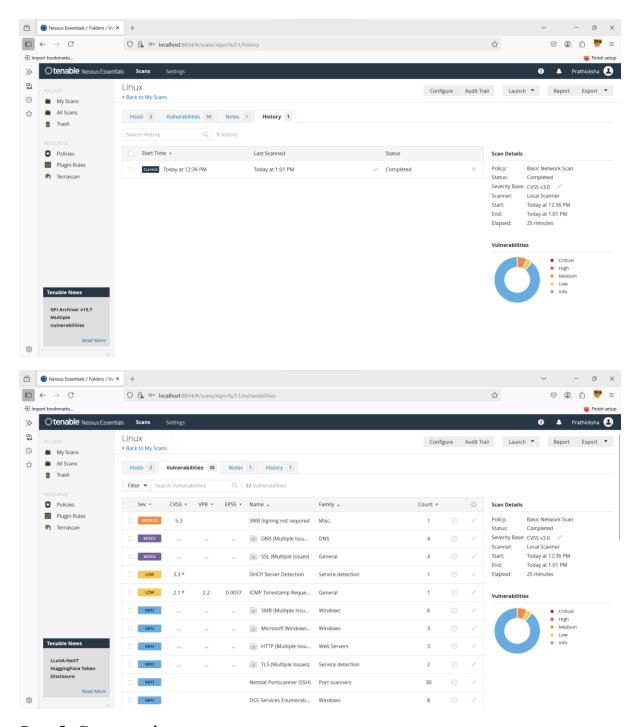

Step 5: Generate the report.

