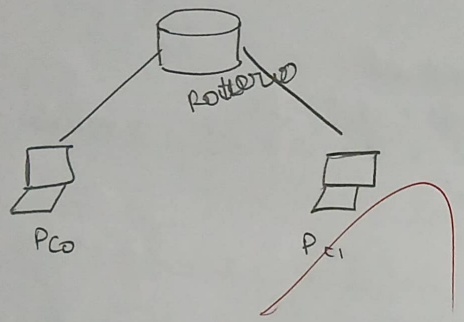


22/8/25

Experiment - 10 (a)

Internetworking with routers in cisco packet tracer

Aim:

To design and configure a simple internetwork using a router in cisco packet tracer.

Requirements:

* cisco packet tracer
* 1 router
* 2 PCs
* copper straight-through cables.

Procedure:

1. Open the router CLI.
2. Enter enable and configure terminal.
3. connect the PCs to the router using copper straight-through cables.
4. click Router1
5. Select CLI
6. Press Enter
7. Type the following commands:

```
enable
configure terminal
interface FastEthernet 0/0
ip address 192.168.10.1 255.255.255.0
no shutdown
exit
interface FastEthernet 0/1
```

no shutdown
exit.

8. click PC0.
9. Go to Desktop -> ip configuration
10. Enter
    IP address : 192.168.10.2
    Subnet Mask : 255.255.255.0
    Default Gateway : 192.168.10.1
11. connect the devices
12. select PC0 -> Desktop -> command prompt
13. Type : ping 192.168.20.2
14. Send PDU
15. check the simulation for successful packet delivery.

Observation:

PC0 and PC1 communicated successfully through the router.

Result:

Thus, interworking using a router was successfully implemented in cisco packet tracer.

Bull 16/10