

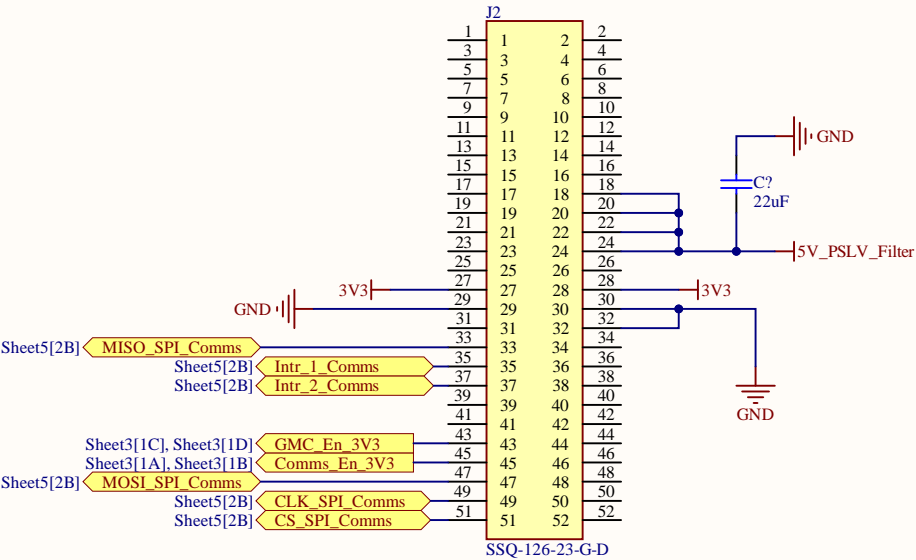
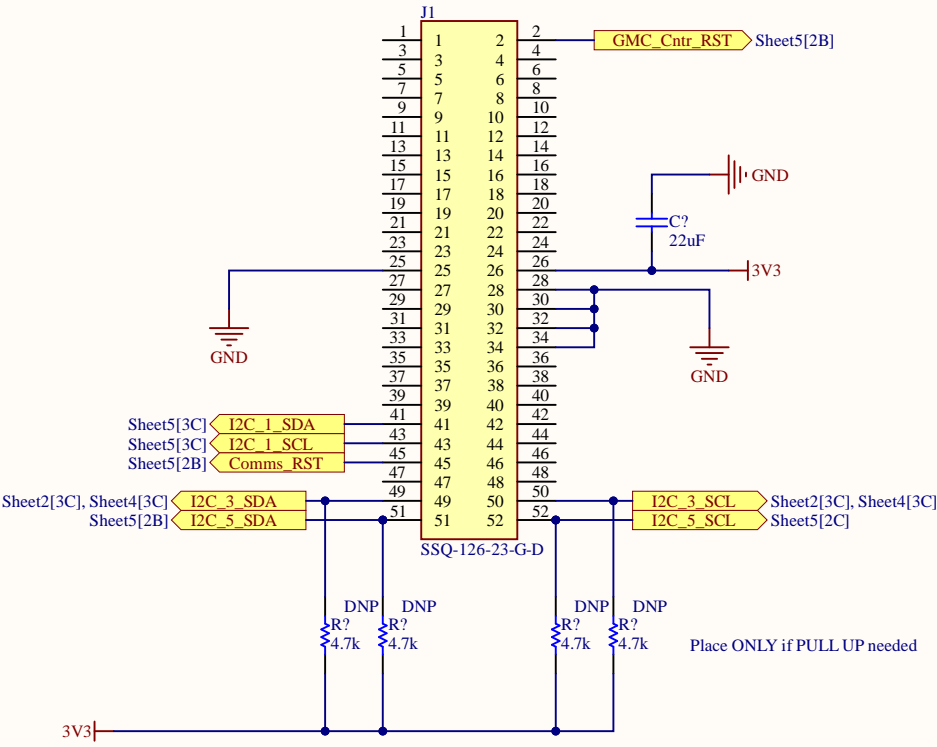

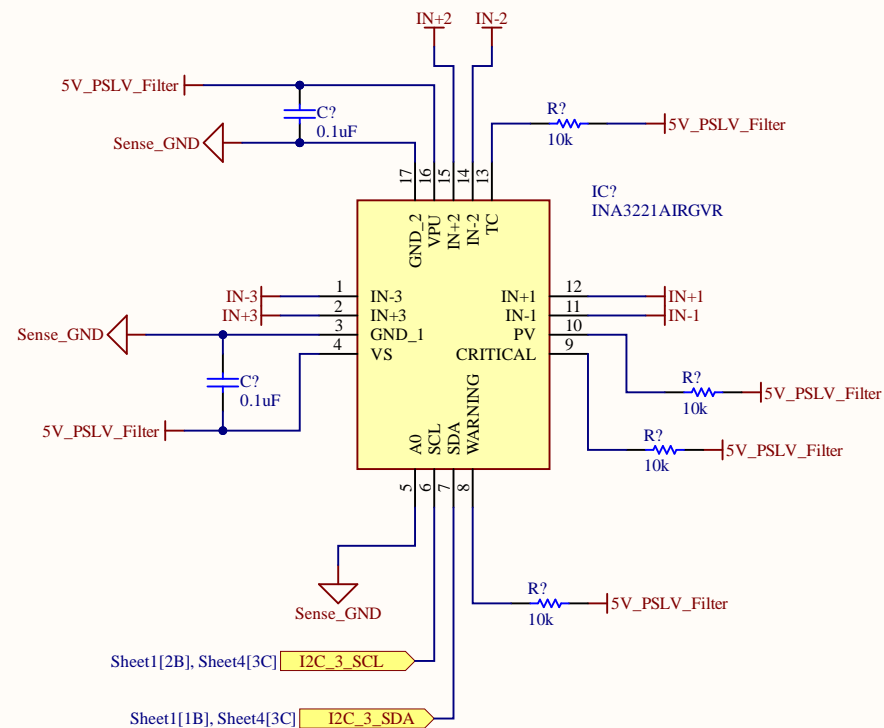
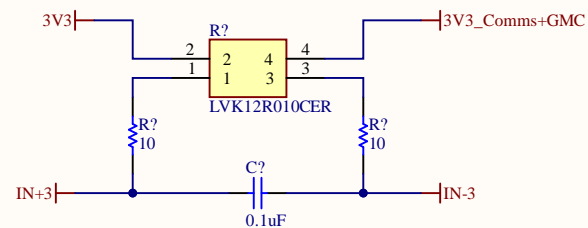


PC104 Connectors

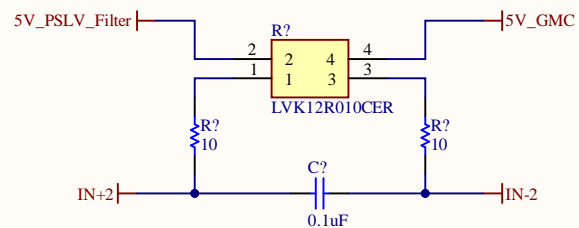



Title		
Size	Number	Revision
A4		
Date:	3-05-2024	Sheet of
File:	C:\Users\...\Sheet1.SchDoc	Drawn By:

Voltage and Current Sense


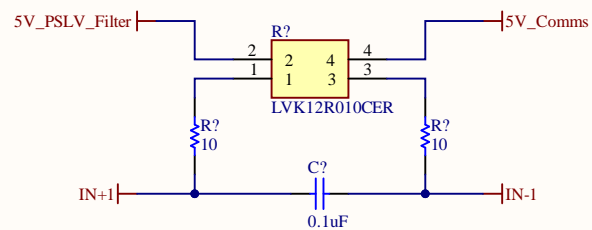


Title		
Size A4	Number	Revision
Date:	3-05-2024	Sheet of
File:	C:\Users\...\Sheet2.SchDoc	Drawn By:



Enable Switches

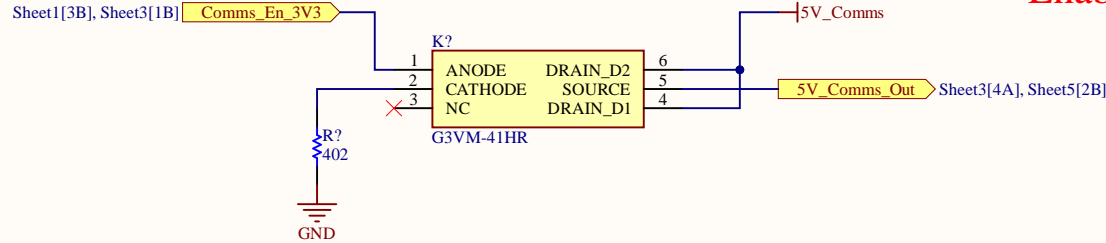



Place ONLY when Solid State switches FAIL

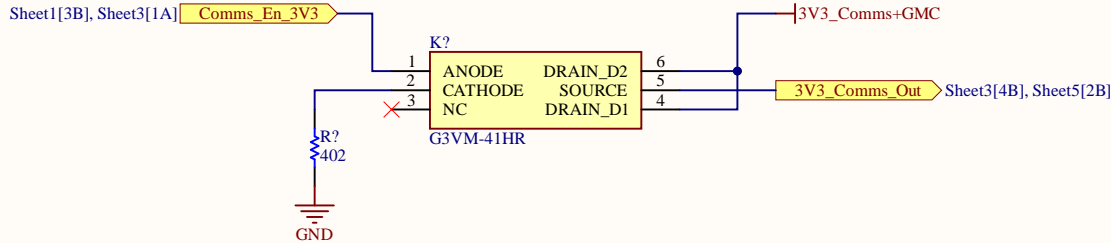

Place ONLY when Solid State switches FAIL

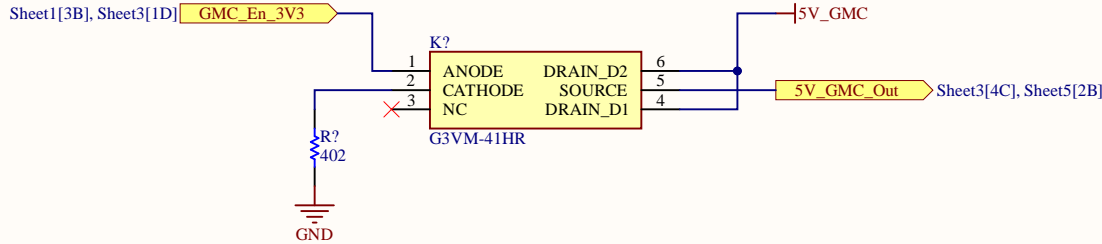


Place ONLY when Solid State switches FAIL

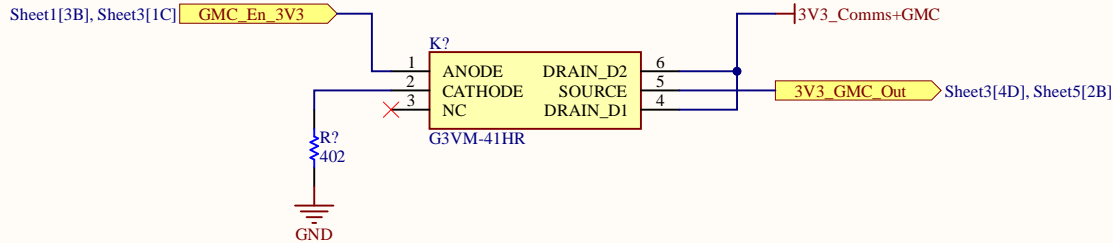


Place ONLY when Solid State switches FAIL

Title		
Size	Number	Revision
A4		
Date:	3-05-2024	Sheet of
File:	C:\Users\...\Sheet3.SchDoc	Drawn By:

Thermistor ADC

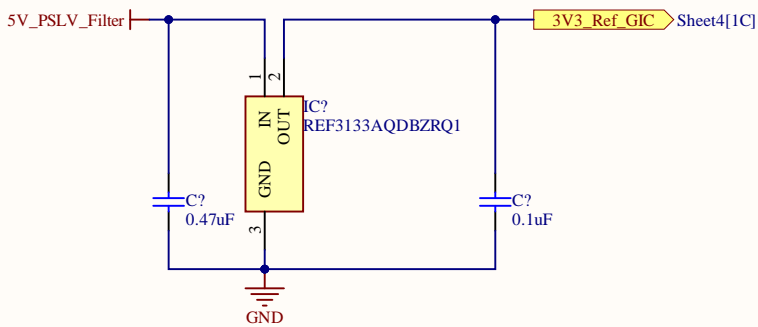


I2C Adress : 010 0011

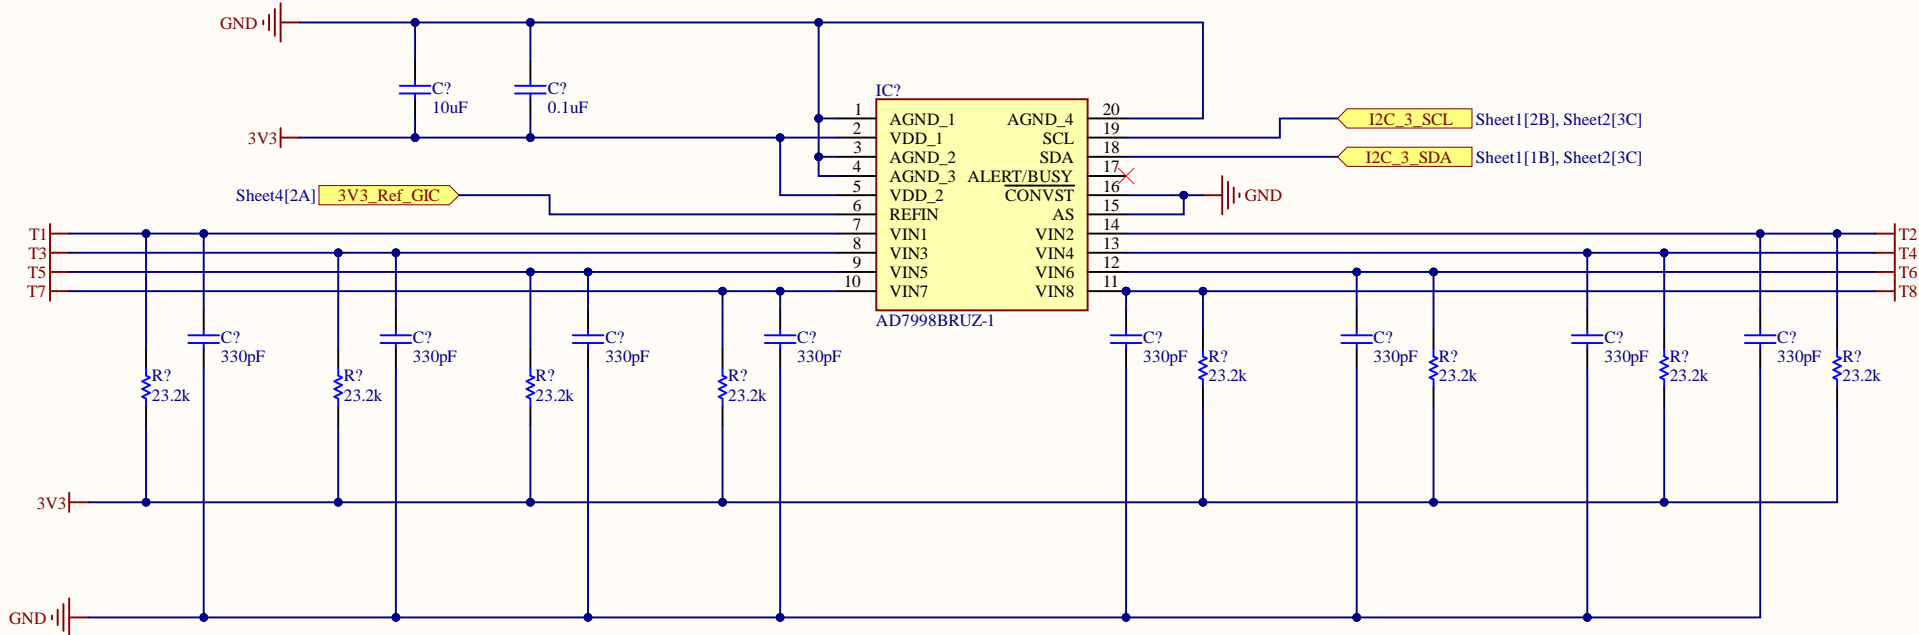

Title		
Size	Number	Revision
A4		
Date:	3-05-2024	Sheet of
File:	C:\Users\...\Sheet4.SchDoc	Drawn By:

50 Pin Right Angled D-Pin Connector

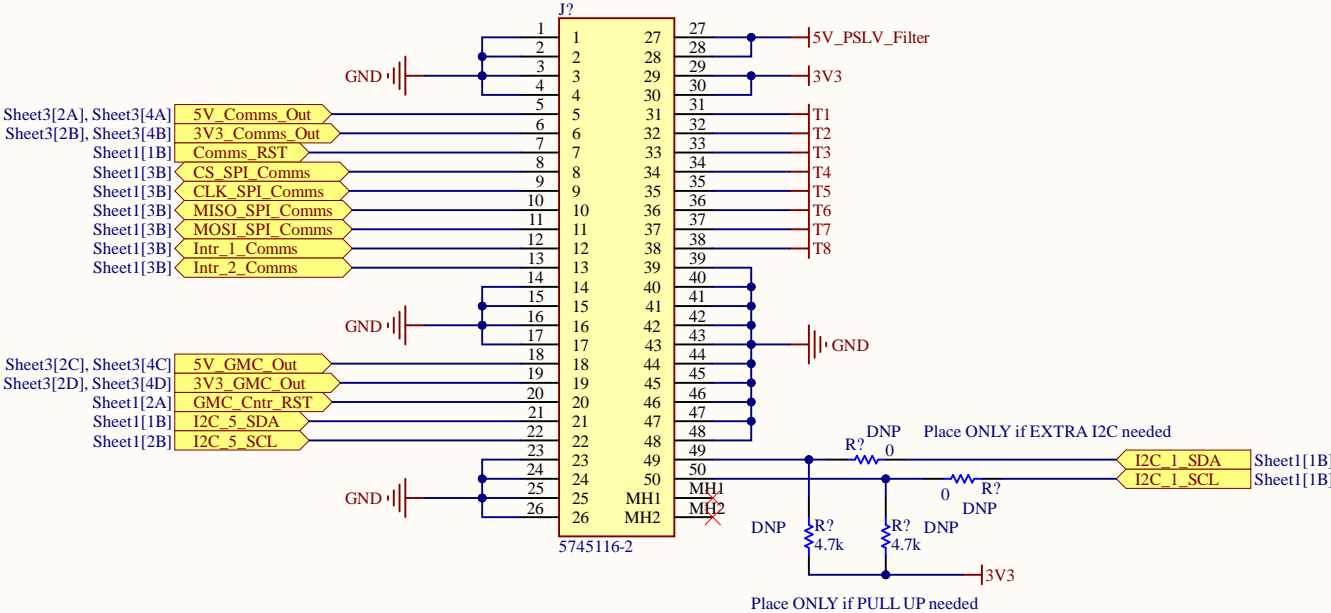

Title		
Size	Number	Revision
A4		
Date:	3-05-2024	Sheet of
File:	C:\Users\...\Sheet5.SchDoc	Drawn By:

Board Stack Report